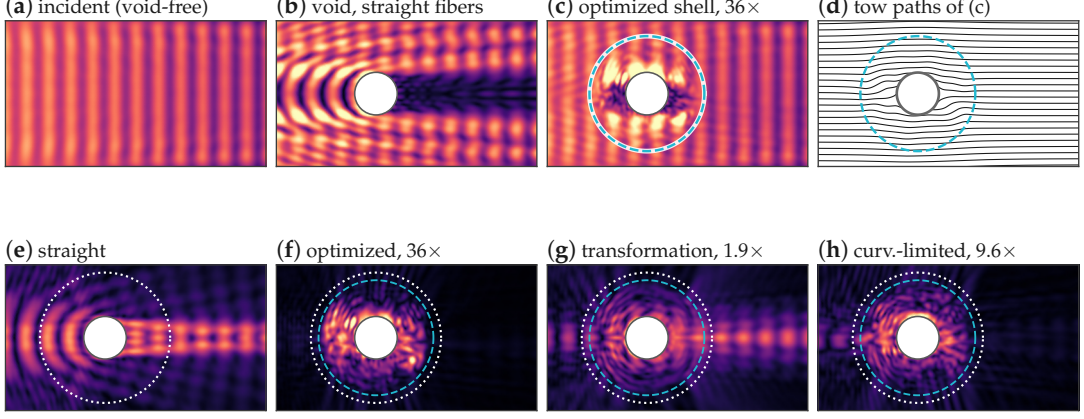

(a) incident (void-free)
(b) void, straight fibers
(c) optimized shell, 36×
(d) tow paths of (c)
total |u|
(e) straight
(f) optimized, 36×
(g) transformation, 1.9×
(h) curv.-limited, 9.6×
scattered |u − u_inc|
0.008
0.006
0.004
0.002
0.000
|u|, |u − u_inc| (one scale)