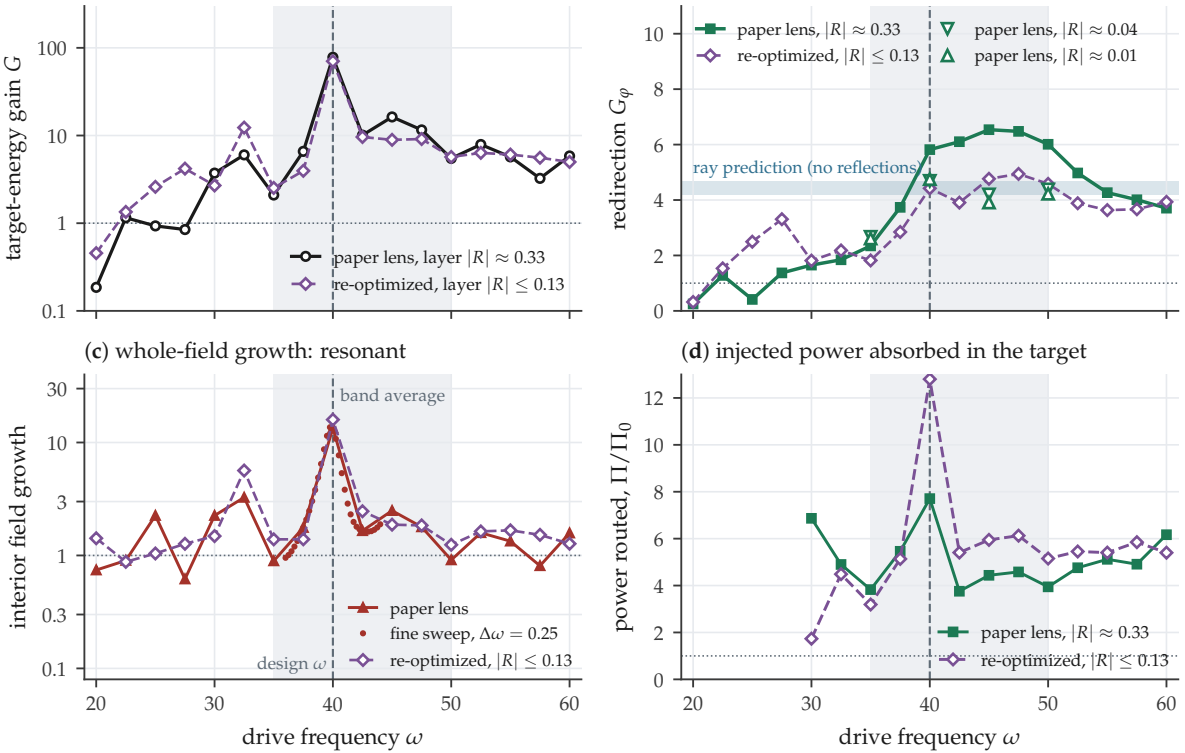

(a) single-frequency gain: narrow peak
target-energy gain G
100
10
1
0.1
paper lens, layer $|R| \approx 0.33$
re-optimized, layer $|R| \leq 0.13$
(b) redirection: broadband
redirection G_φ
10
8
6
4
2
0
paper lens, $|R| \approx 0.33$
re-optimized, $|R| \leq 0.13$
paper lens, $|R| \approx 0.04$
paper lens, $|R| \approx 0.01$
ray prediction (no reflections)
(c) whole-field growth: resonant
interior field growth
30
10
3
1
0.3
0.1
band average
paper lens
fine sweep, $\Delta\omega = 0.25$
re-optimized, $|R| \leq 0.13$
design ω
20
30
40
50
60
drive frequency ω
(d) injected power absorbed in the target
power routed, Π/Π_0
12
10
8
6
4
2
0
paper lens, $|R| \approx 0.33$
re-optimized, $|R| \leq 0.13$
20
30
40
50
60
drive frequency ω