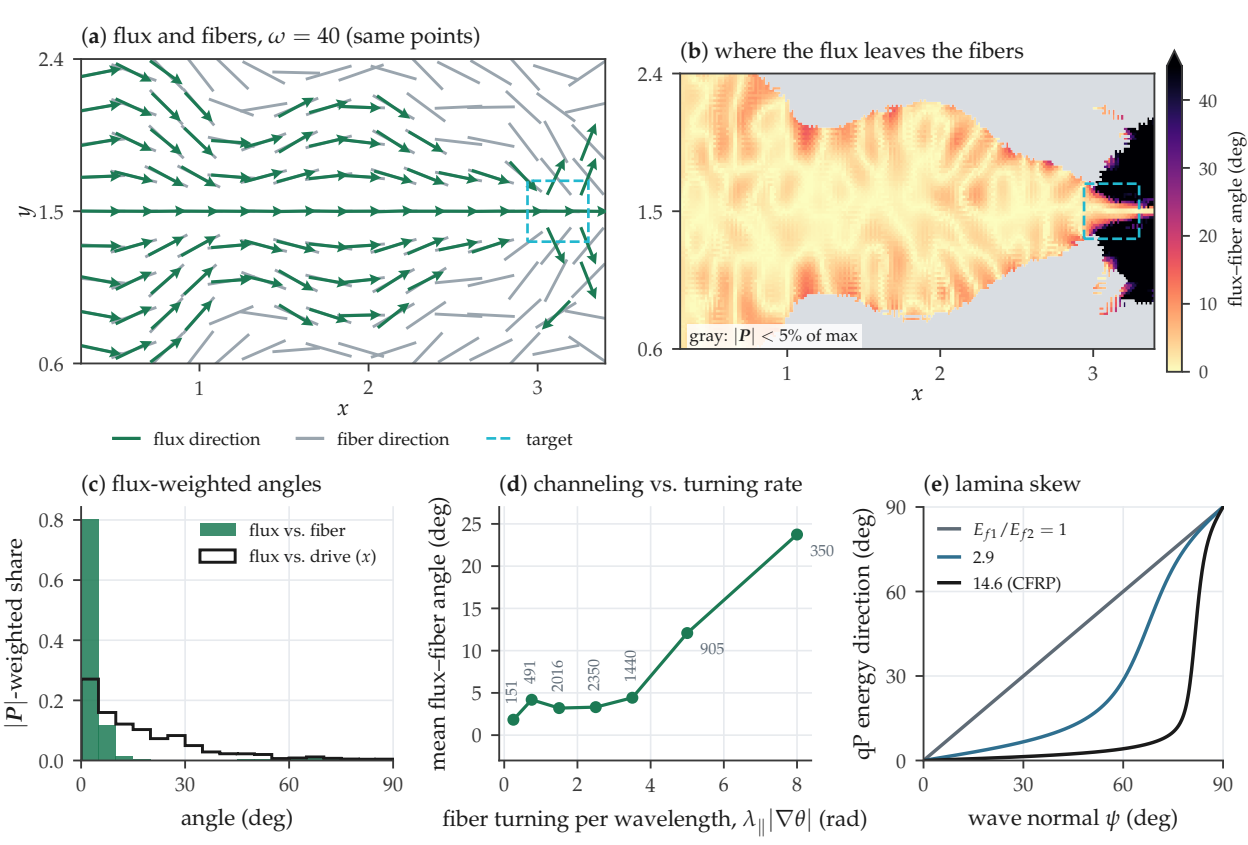

(a) flux and fibers, ω = 40 (same points)
2.4
1.5
0.6
y
1
2
3
x
flux direction
fiber direction
target
(b) where the flux leaves the fibers
gray: |P| < 5% of max
flux–fiber angle (deg)
40
30
20
10
0
(c) flux-weighted angles
flux vs. fiber
flux vs. drive (x)
|P|-weighted share
0.8
0.6
0.4
0.2
0.0
0
30
60
90
angle (deg)
(d) channeling vs. turning rate
mean flux–fiber angle (deg)
25
20
15
10
5
0
151
491
2016
2350
1440
905
350
0
2
4
6
8
fiber turning per wavelength, λ∥|∇θ| (rad)
(e) lamina skew
qP energy direction (deg)
90
60
30
0
E_f1 / E_f2 = 1
2.9
14.6 (CFRP)
0
30
60
90
wave normal ψ (deg)