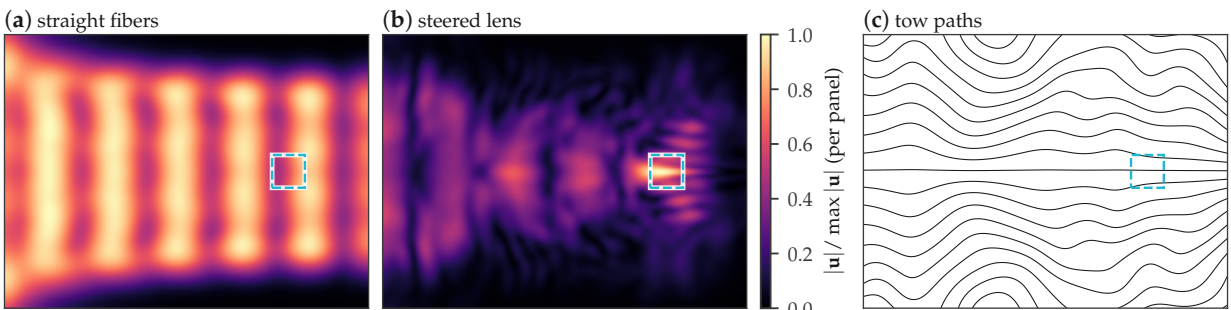

(a) straight fibers
(b) steered lens
1.0
0.8
0.6
0.4
0.2
0.0
|u| / max |u| (per panel)
(c) tow paths