


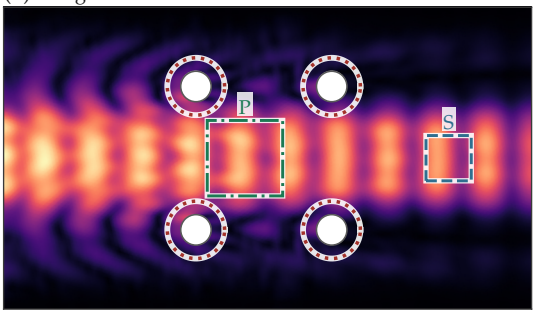


(**a**) straight fibers

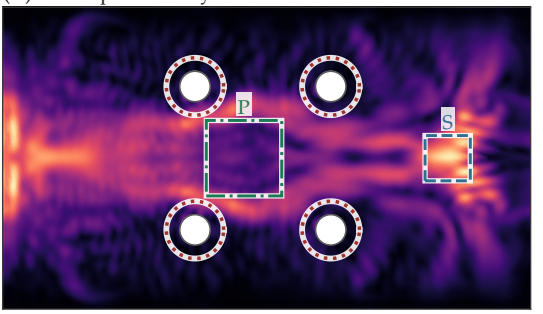


(**b**) band-optimized layout



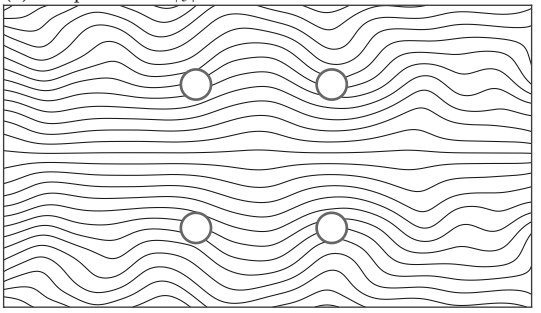

(**c**) tow paths, max $|\zeta| = 5.4 \leq 6.25$

(**d**) performance across frequency

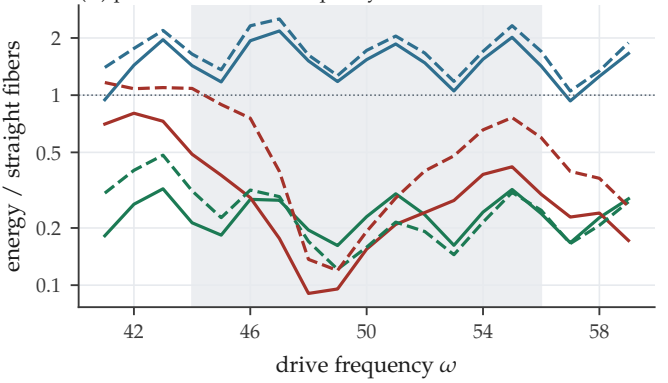

sensor S (map: dashed square)
payload P (map: dash-dot square)
fastener rims (map: dotted rings)
band-optimized design
single-frequency design
design band