

Power: NMEA 2000 drop → 5 V

PTC trips on reverse polarity (TVS conducts). EN tied to VIN. Values per LMR54406 datasheet Table 8-1 (5 V, 1.1 MHz).

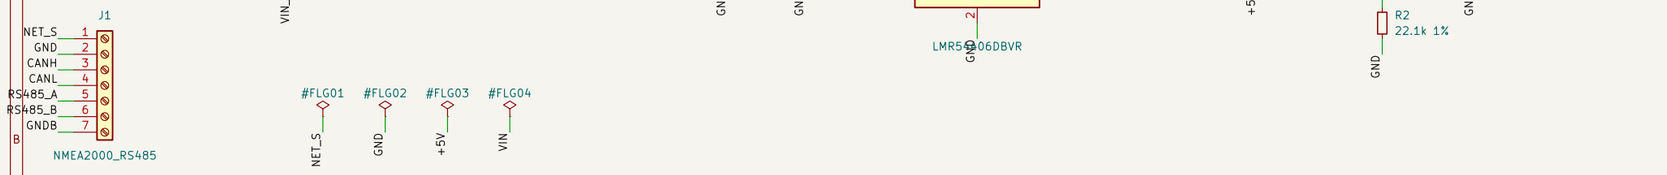


Controller: Seeed XIAO ESP32-S3 (bottom pads not used; keep copper out from under it)

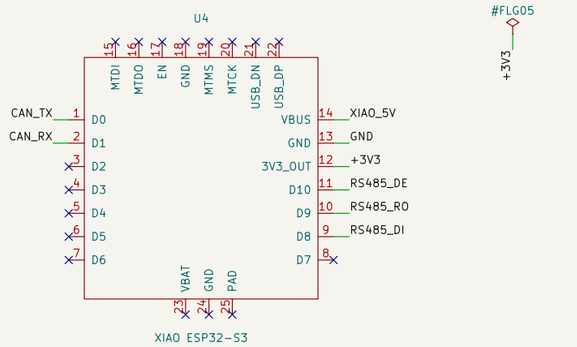

CAN (NMEA 2000): non-isolated, bus-powered


Bus pins ±58 V. S tied low: normal mode. JP1 closed = 120 Ω termination (leave open on a drop).

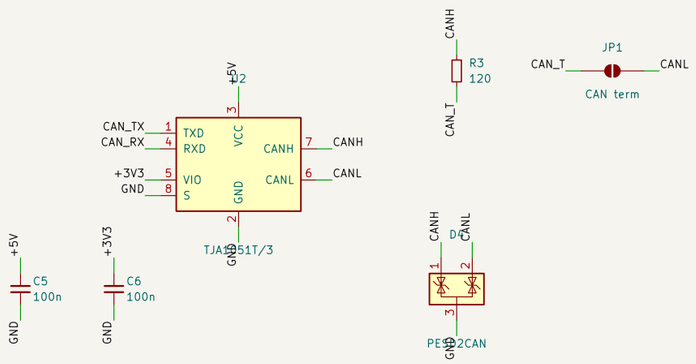


RS485 / RS422: isolated (CA-IS2092VW, 3.75 kVrms)

VCC from 5 V (powers the isolated DC-DC), VCCL 3.3 V logic. SEL to VISO: VISO = 5 V. RE low: receiver always on.

JP2 closed = 120 Ω termination. GNDB goes to J1 pin 7 for the RS422 device's signal ground.

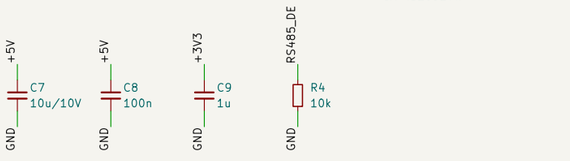

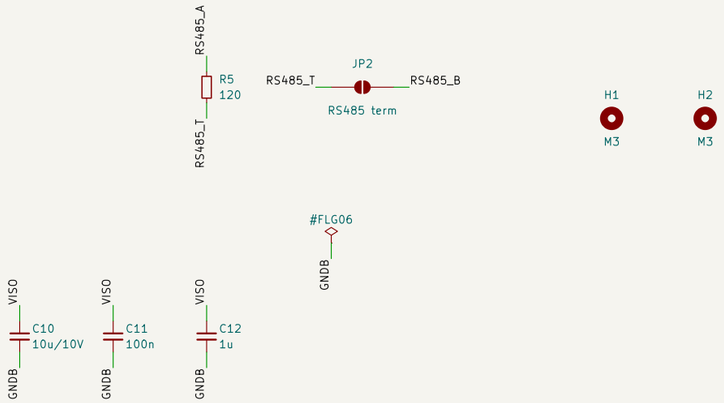

CERN-OHL-S-2.0
XIAO ESP32-S3 carrier: NMEA 2000 (CAN) + isolated RS485, bus powered

Sheet: /
File: n2k_atom_can485.kicad_sch

Title: n2k_atom_can485

Size: A3	Date: 2026-10-30	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 1/1