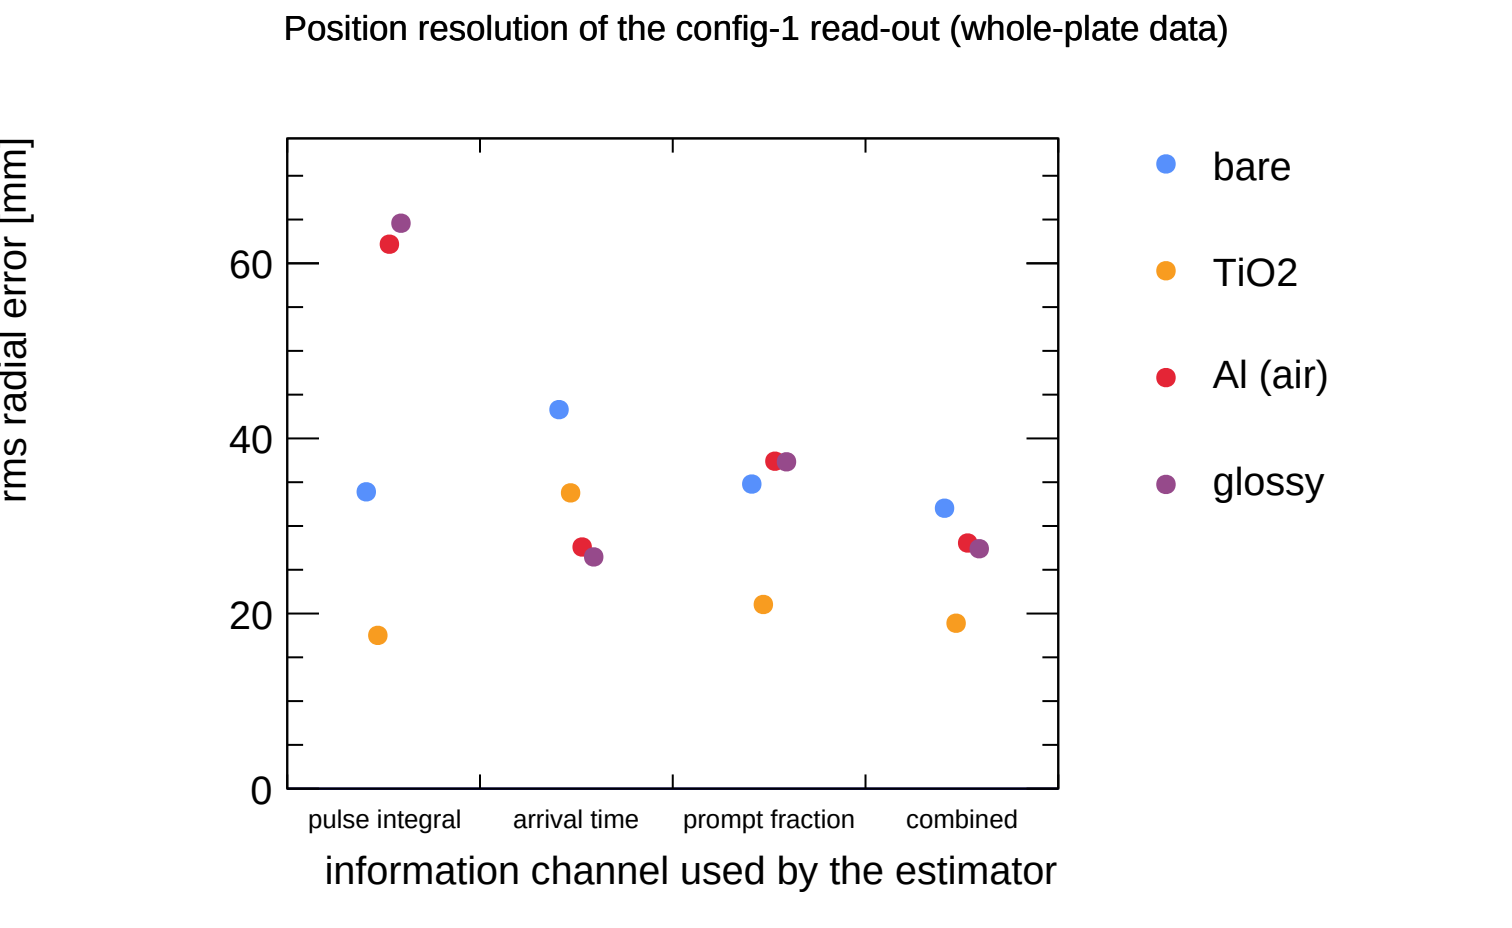
Position resolution of the config-1 read-out (whole-plate data)
rms radial error [mm]
0
20
40
60
pulse integral
arrival time
prompt fraction
combined
information channel used by the estimator
bare
TiO2
Al (air)
glossy