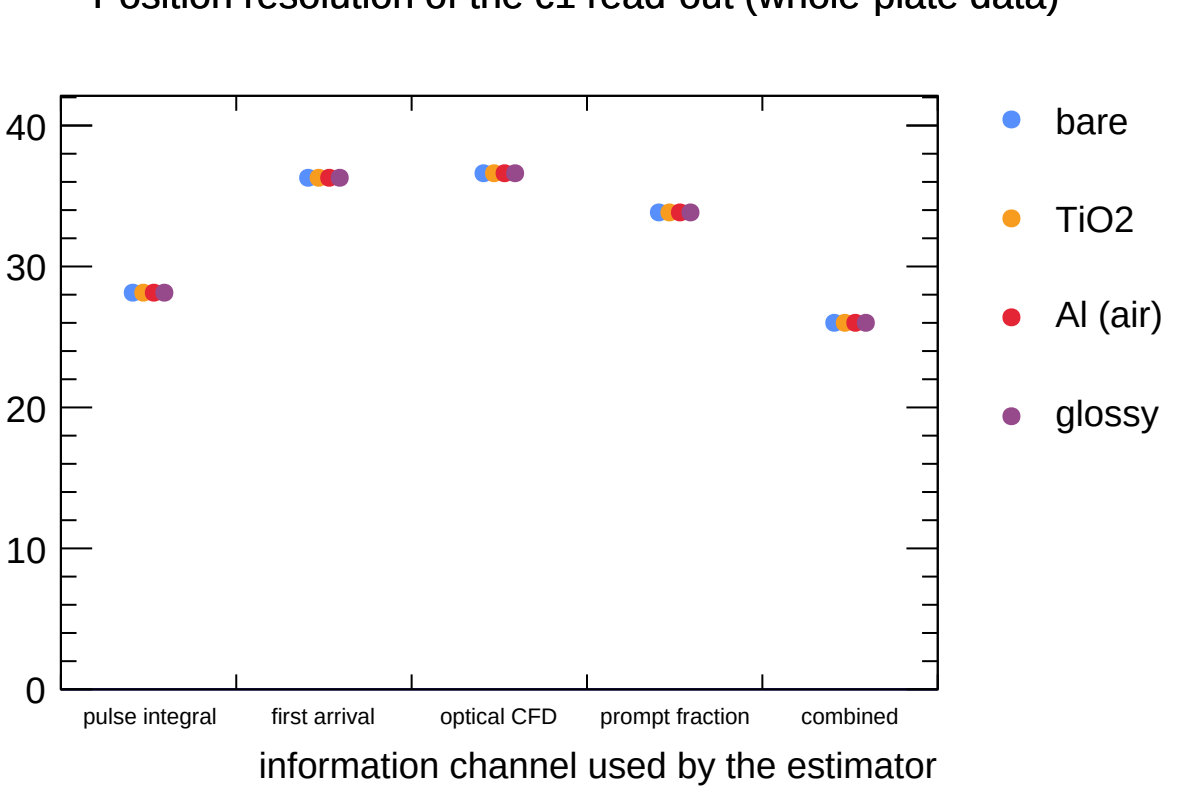
Position resolution of the c1 read-out (whole-plate data)
40
30
20
10
0
pulse integral
first arrival
optical CFD
prompt fraction
combined
information channel used by the estimator
bare
TiO2
Al (air)
glossy