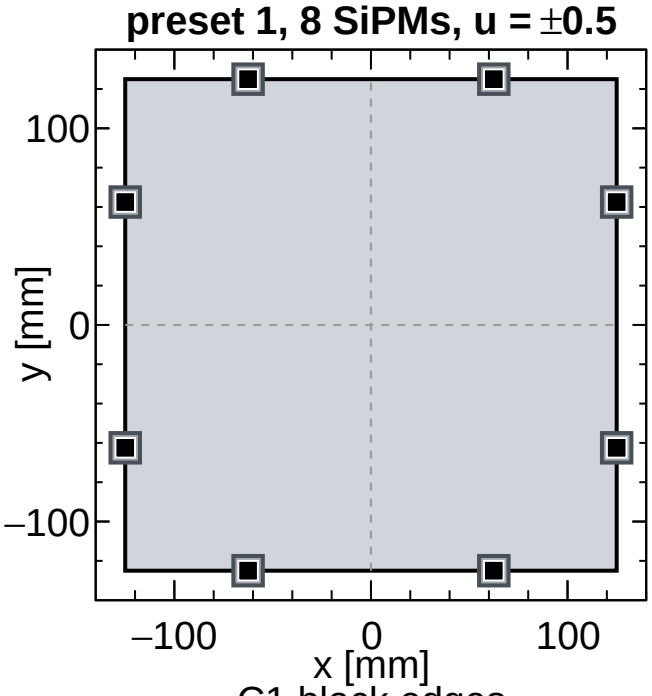

C1 black edges
C1 diffuse edges
C1 6 mm, diffuse edges
C1 control, glossy

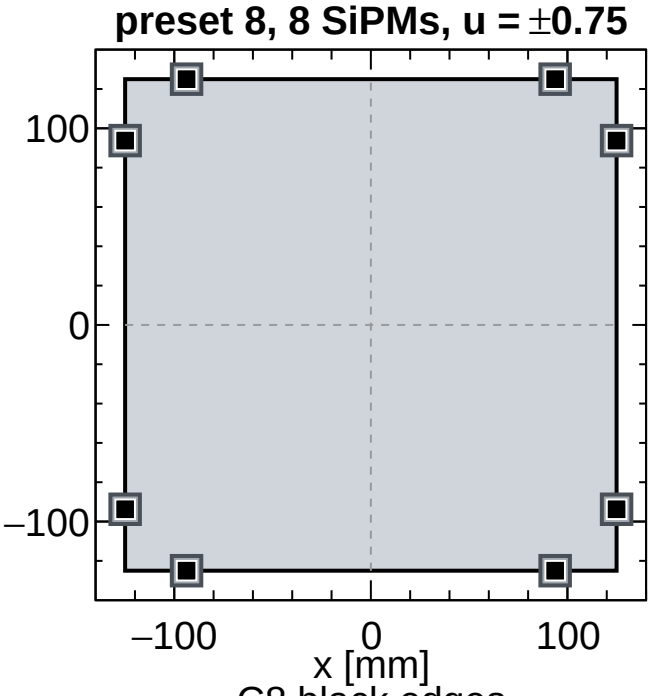

C8 black edges
C8 6 mm, diffuse edges
Grey outline: 6 mm footprint

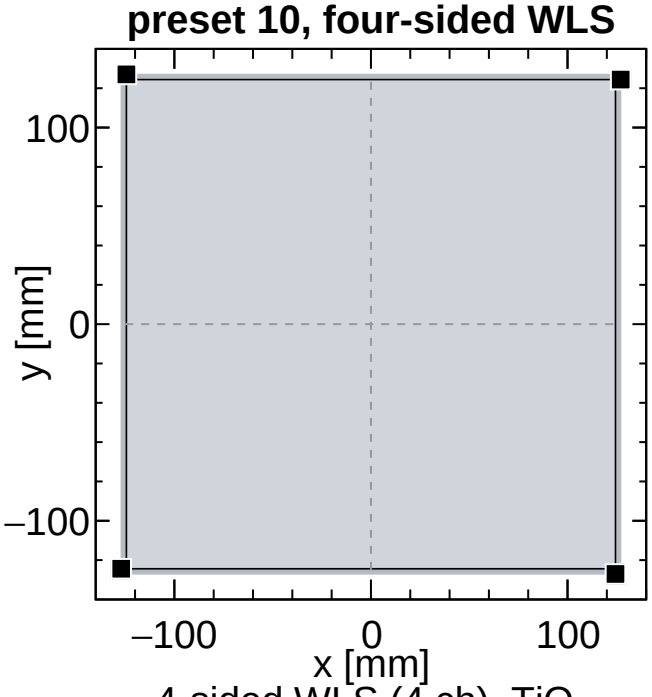

4-sided WLS (4 ch), TiO_2
4-sided WLS (4 ch), glossy
4-sided WLS (8 ch, dual), TiO_2
4-sided WLS (8 ch, dual), glossy

Geometry & Symbol Key

COMPONENT SYMBOLS

4 × 4 mm² SiPM (active)
Read-out sensor (presets 1, 8, 10)

6 × 6 mm² footprint
Large-area variant (C1/C8 diffuse)

Four-sided WLS clamp
2 mm bar on 4 faces (preset 10)

Scintillator plate (10 mm)
250 × 250 mm² UPS-92S

SCALE & ORIENTATION

Positions to scale; markers 2.5×
Report plan view: top = +y, right = +x

PRESET REFERENCE

Preset 1: 8 SiPMs (u = ±0.5)
Preset 8: 8 SiPMs (u = ±0.75)
Preset 10: 4 WLS channels (1 / face)
Preset 11: 8 WLS ch (dual read-out)