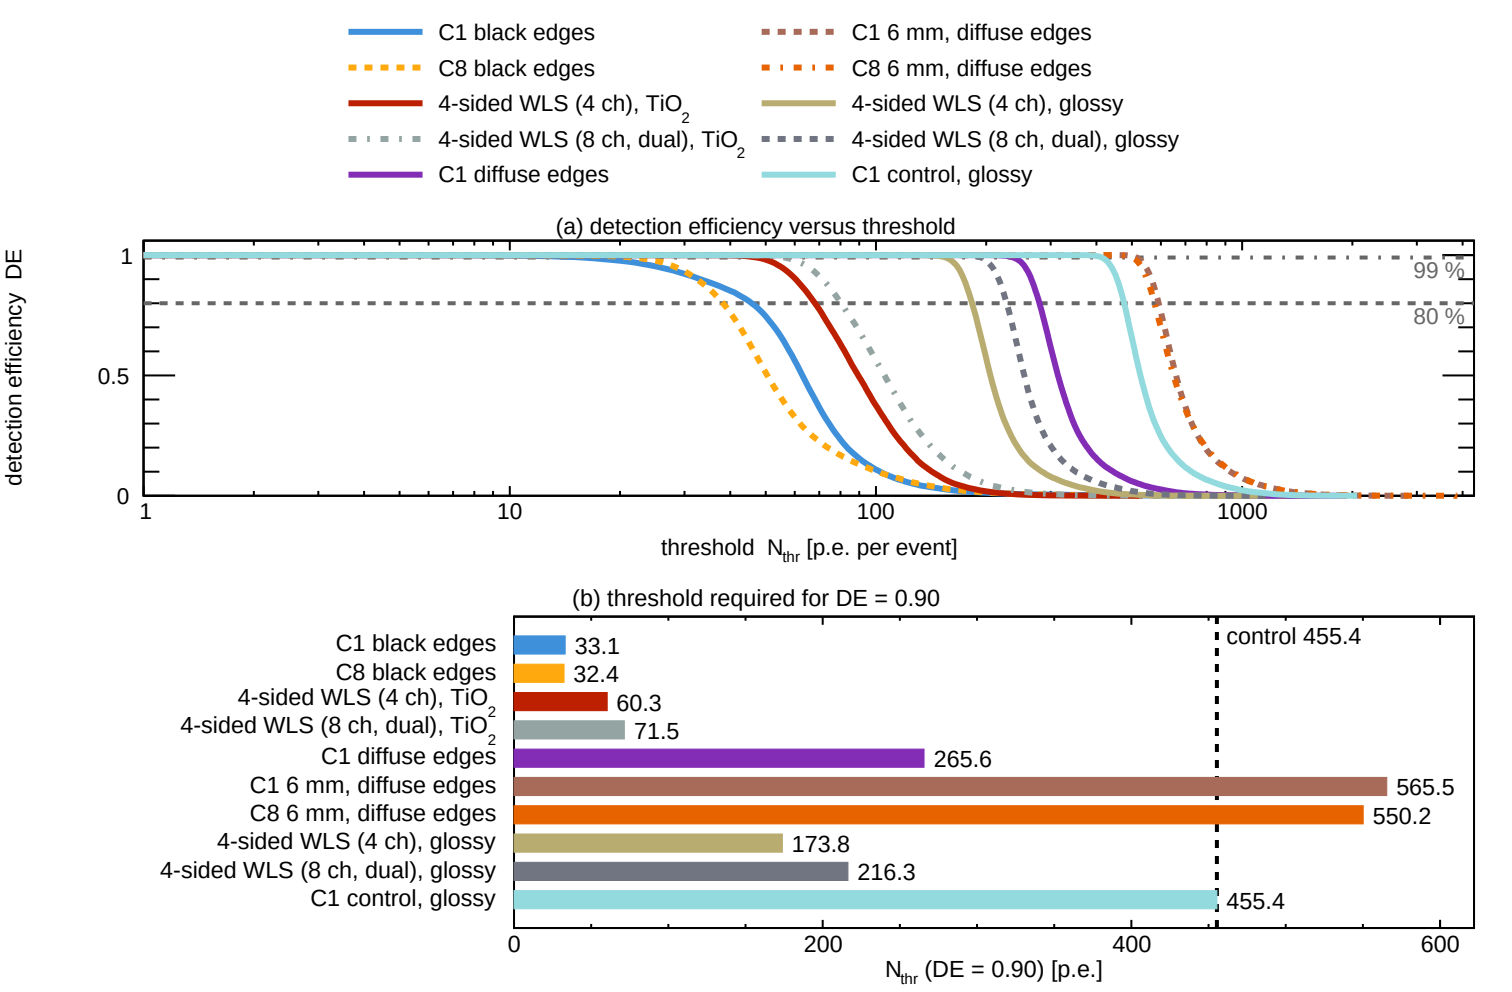

C1 black edges
C8 black edges
4-sided WLS (4 ch), TiO2
4-sided WLS (8 ch, dual), TiO2
C1 diffuse edges
C1 6 mm, diffuse edges
C8 6 mm, diffuse edges
4-sided WLS (4 ch), glossy
4-sided WLS (8 ch, dual), glossy
C1 control, glossy
(a) detection efficiency versus threshold
detection efficiency DE
1
0.5
0
99 %
80 %
1
10
100
1000
threshold Nthr [p.e. per event]
(b) threshold required for DE = 0.90
C1 black edges
C8 black edges
4-sided WLS (4 ch), TiO2
4-sided WLS (8 ch, dual), TiO2
C1 diffuse edges
C1 6 mm, diffuse edges
C8 6 mm, diffuse edges
4-sided WLS (4 ch), glossy
4-sided WLS (8 ch, dual), glossy
C1 control, glossy
33.1
32.4
60.3
71.5
265.6
565.5
550.2
173.8
216.3
455.4
control 455.4
0
200
400
600
Nthr (DE = 0.90) [p.e.]