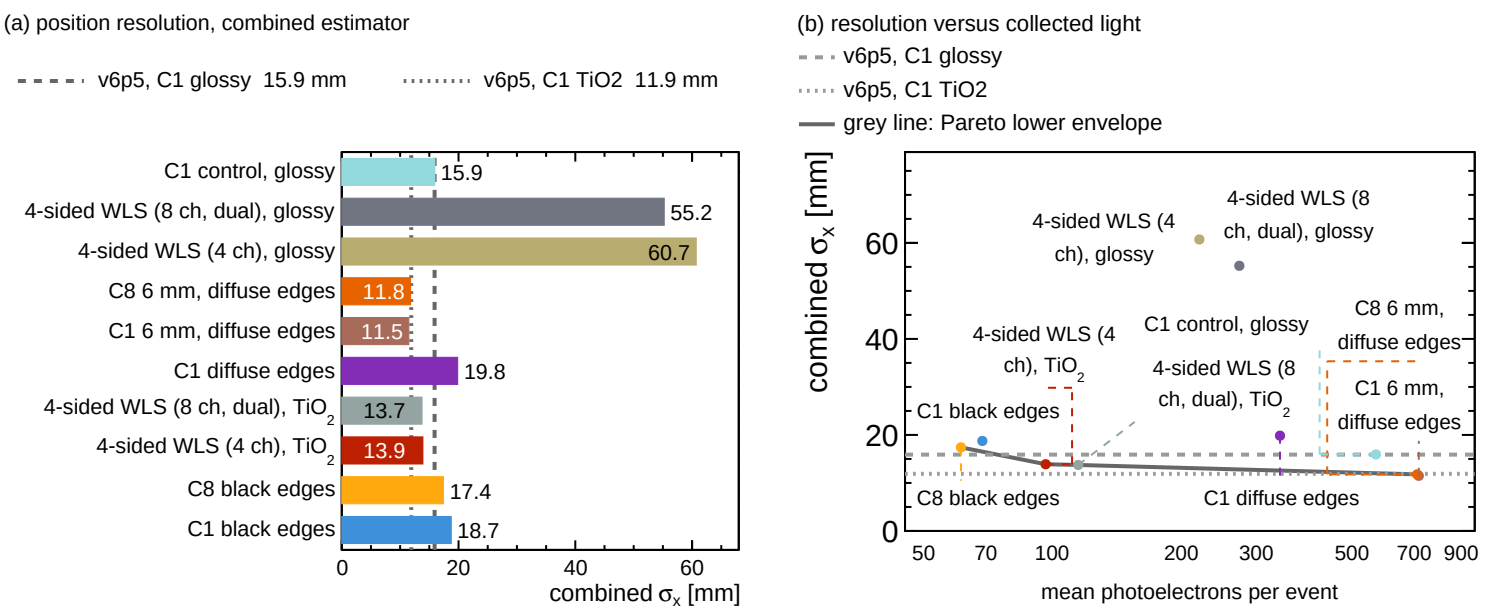
(a) position resolution, combined estimator
v6p5, C1 glossy 15.9 mm
v6p5, C1 TiO2 11.9 mm
C1 control, glossy
15.9
4-sided WLS (8 ch, dual), glossy
55.2
4-sided WLS (4 ch), glossy
60.7
C8 6 mm, diffuse edges
11.8
C1 6 mm, diffuse edges
11.5
C1 diffuse edges
19.8
4-sided WLS (8 ch, dual), TiO2
13.7
4-sided WLS (4 ch), TiO2
13.9
C8 black edges
17.4
C1 black edges
18.7
0
20
40
60
combined σx [mm]
(b) resolution versus collected light
v6p5, C1 glossy
v6p5, C1 TiO2
grey line: Pareto lower envelope
combined σx [mm]
0
20
40
60
4-sided WLS (4 ch), glossy
4-sided WLS (8 ch, dual), glossy
C1 control, glossy
C8 6 mm, diffuse edges
4-sided WLS (4 ch), TiO2
4-sided WLS (8 ch, dual), TiO2
C1 6 mm, diffuse edges
C1 black edges
C8 black edges
C1 diffuse edges
50
70
100
200
300
500
700
900
mean photoelectrons per event