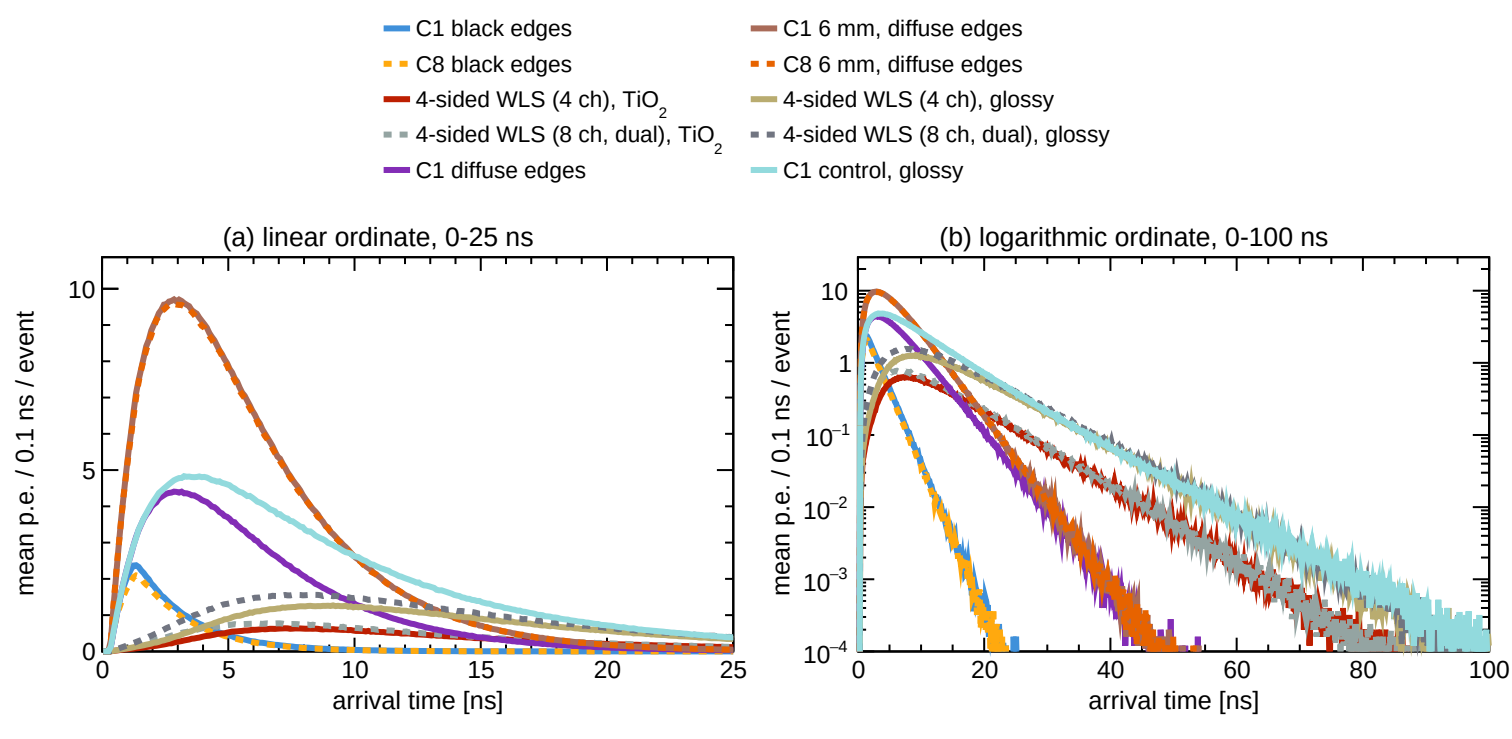

C1 black edges
C8 black edges
4-sided WLS (4 ch), TiO2
4-sided WLS (8 ch, dual), TiO2
C1 diffuse edges
C1 6 mm, diffuse edges
C8 6 mm, diffuse edges
4-sided WLS (4 ch), glossy
4-sided WLS (8 ch, dual), glossy
C1 control, glossy
(a) linear ordinate, 0-25 ns
(b) logarithmic ordinate, 0-100 ns
mean p.e. / 0.1 ns / event
arrival time [ns]
0
5
10
15
20
25
40
60
80
100
1
10^-1
10^-2
10^-3
10^-4