Configuração 12: M = 256, C = 8, K = 12, IoT = 20 dB, 16-QAM
BCD-MMSE (iter 4), inversa no hardware HLS, quantização AP_TRN, estouro AP_SAT

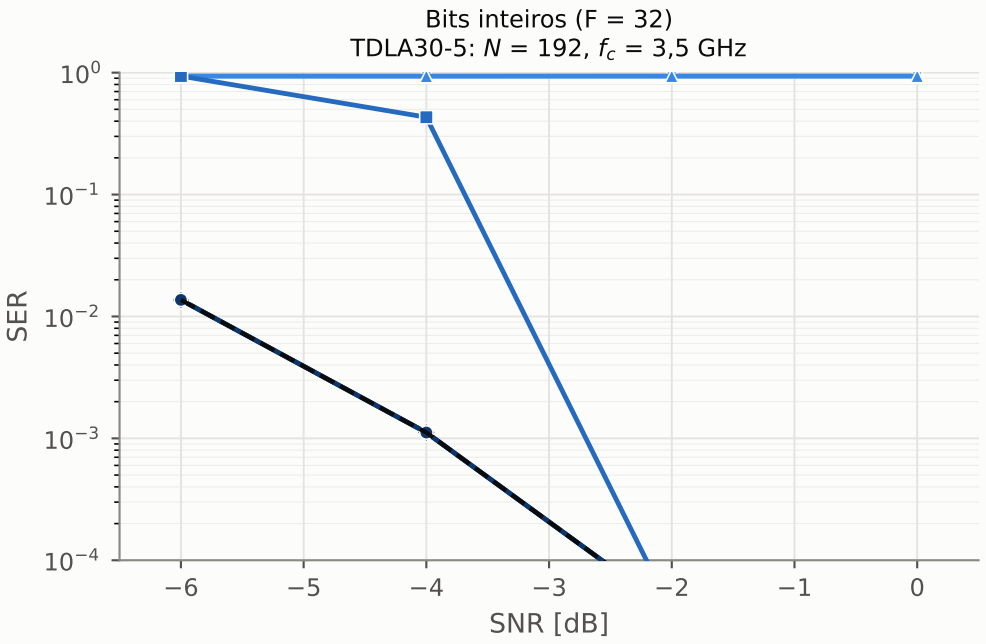

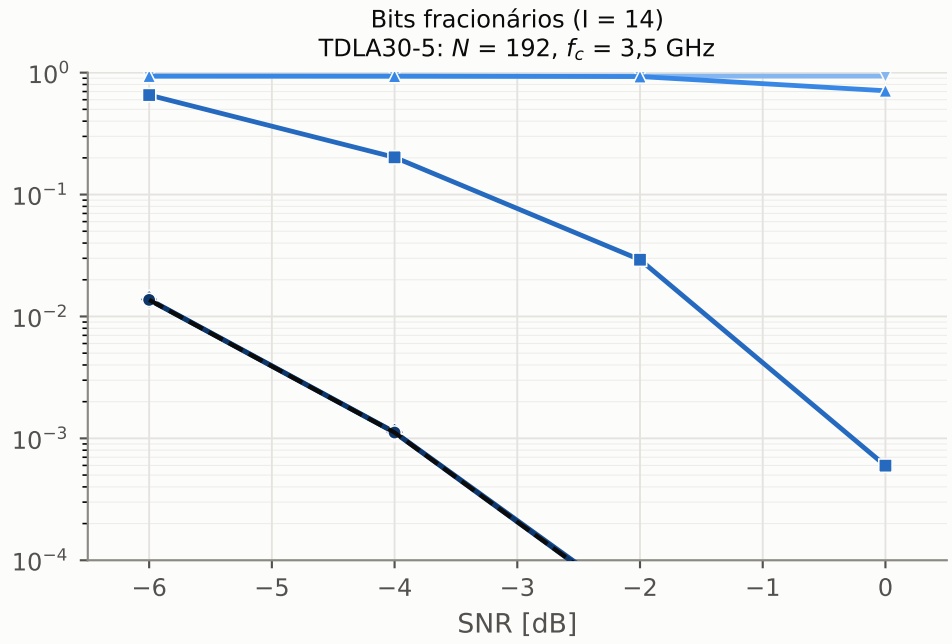

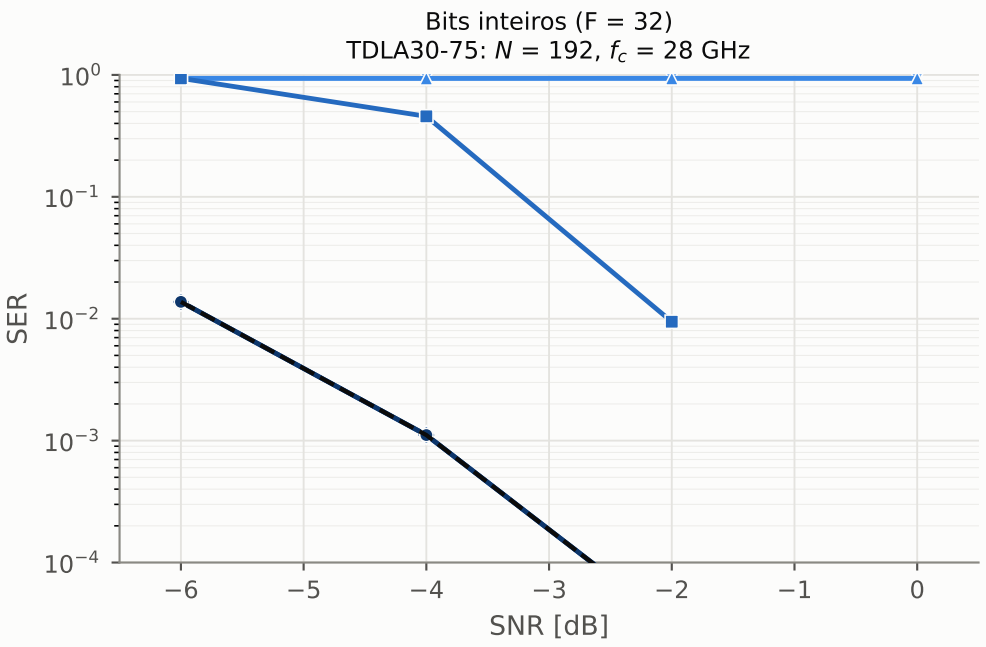

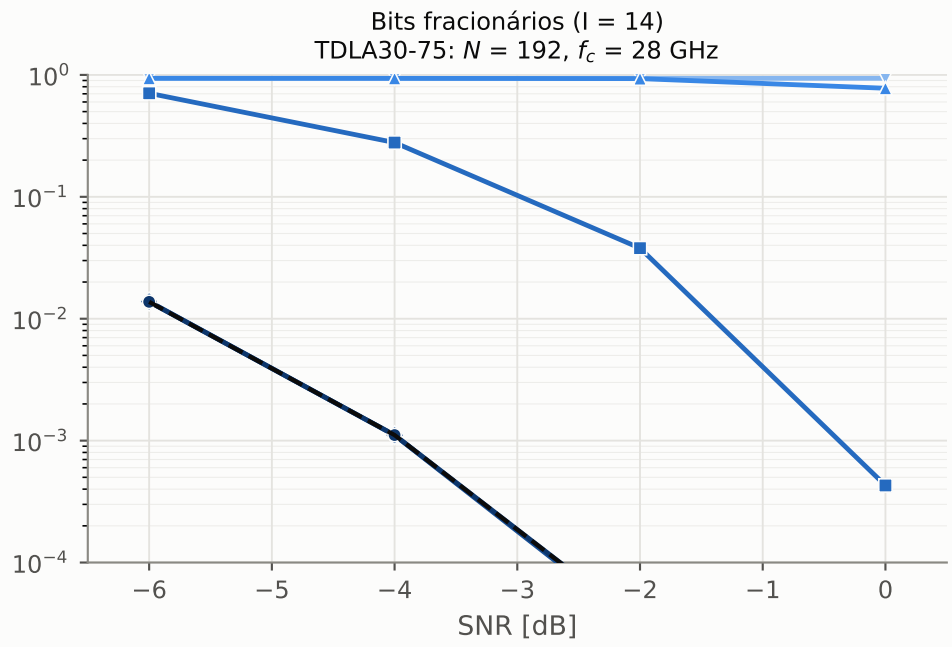

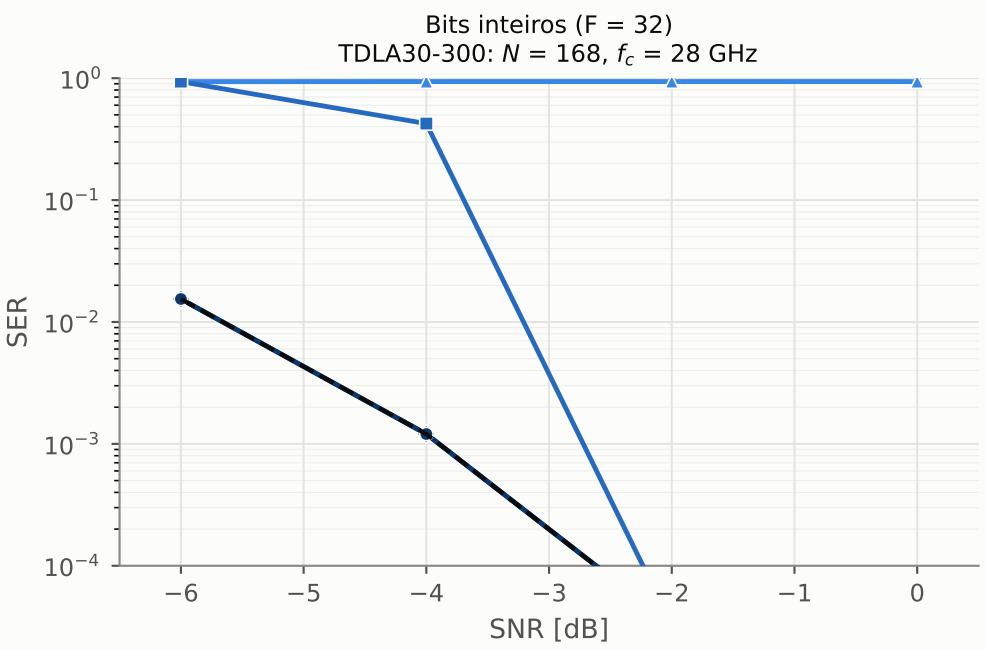

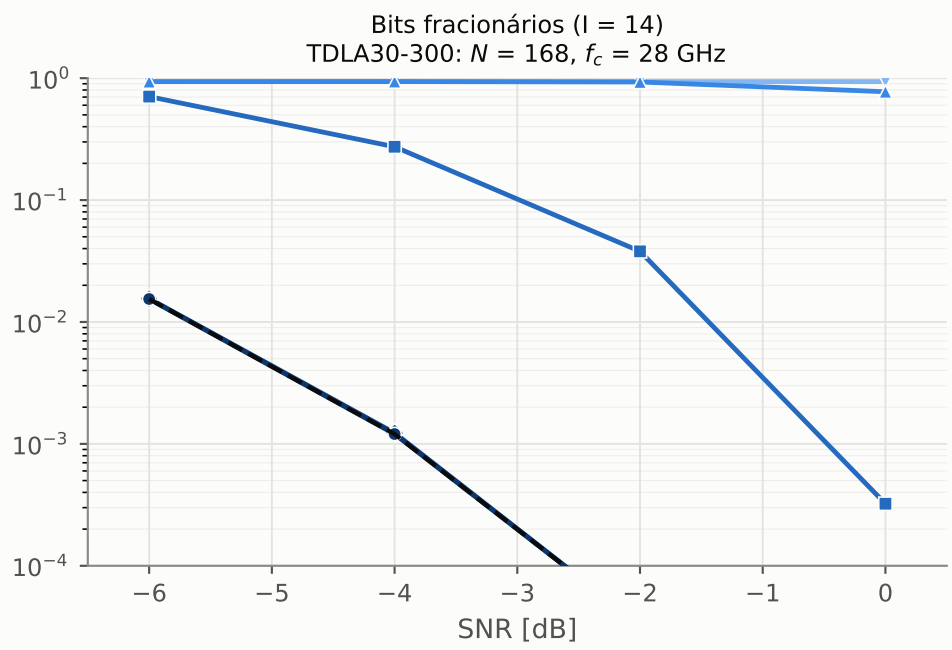

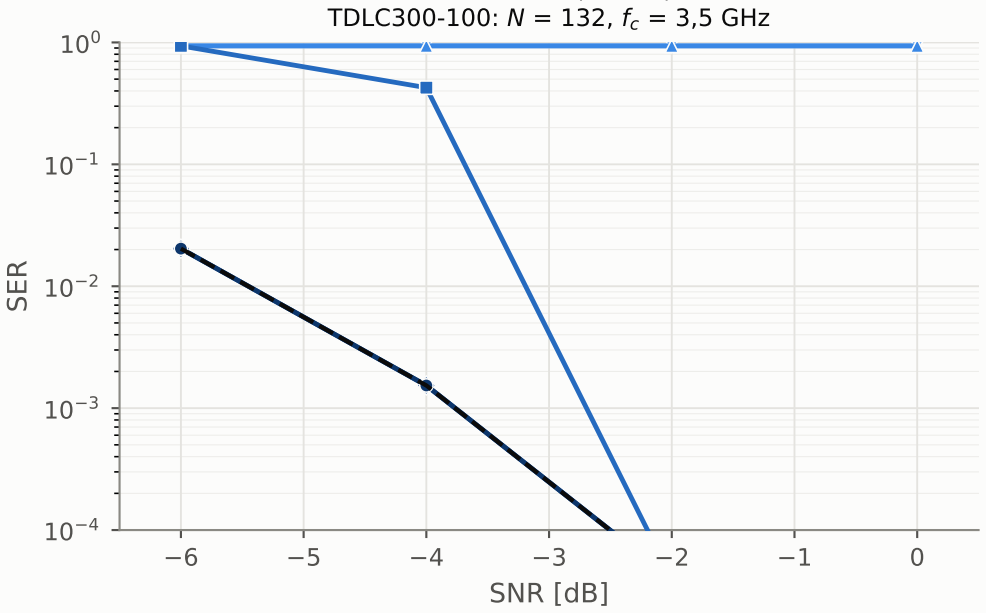

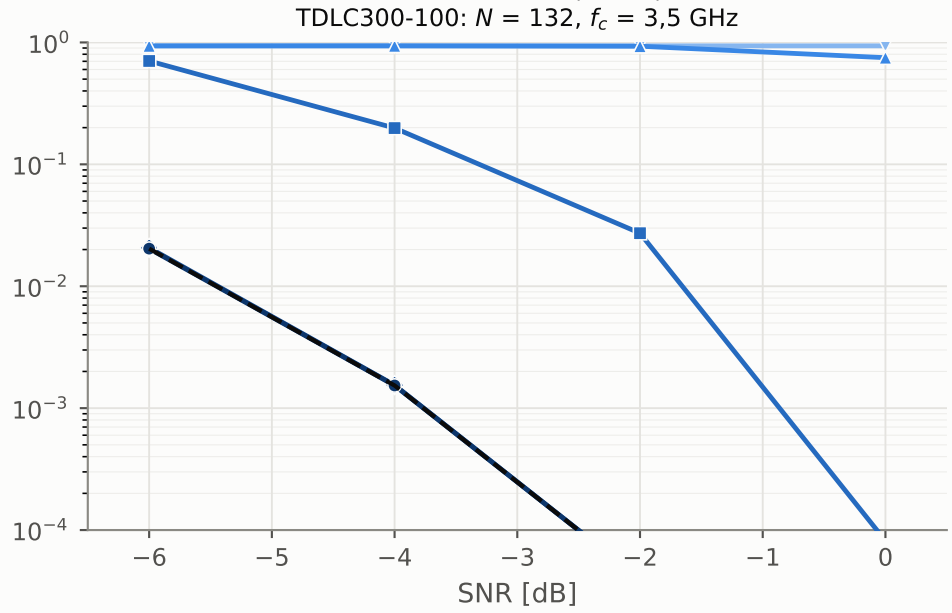

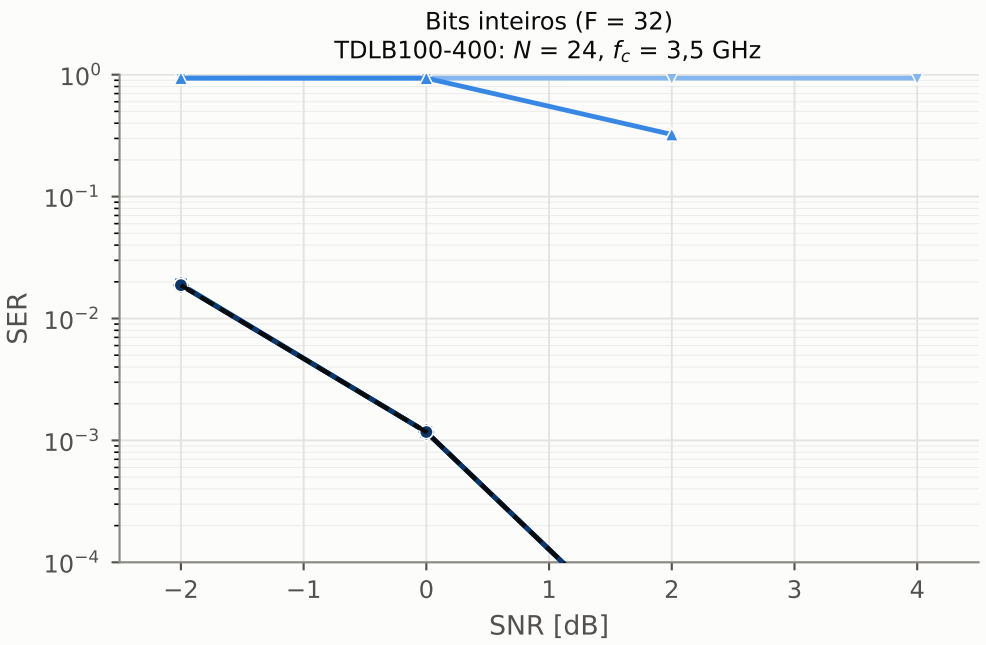

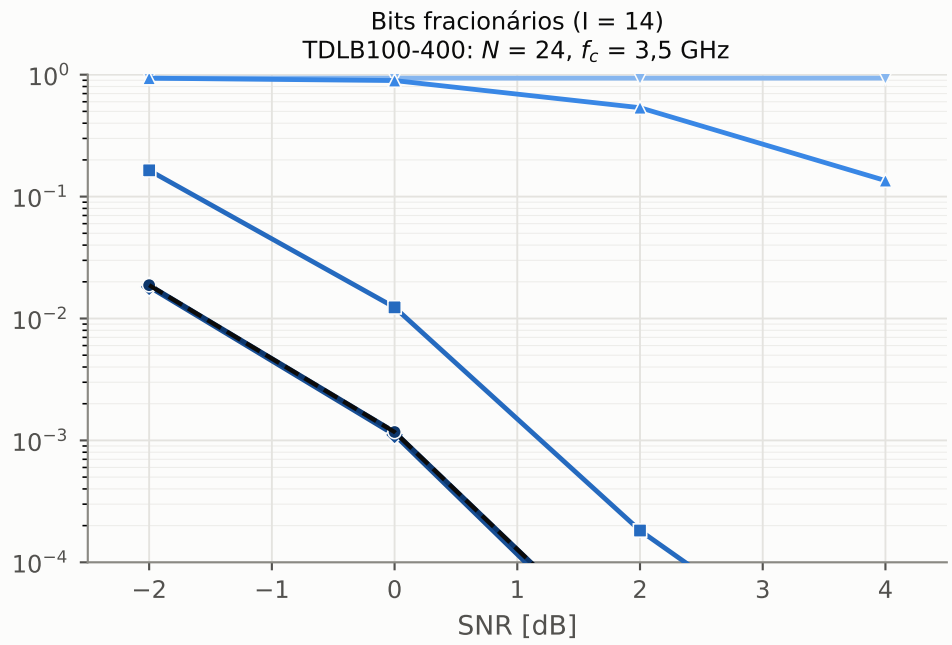

I = 6 (ap_fixed<38,6>) · I = 8 (ap_fixed<40,8>) · I = 10 (ap_fixed<42,10>) · I = 12 (ap_fixed<44,12>) · I = 32 (ap_fixed<64,32>) · referência ideal (float64)

F = 8 (ap_fixed<22,14>) · F = 10 (ap_fixed<24,14>) · F = 12 (ap_fixed<26,14>) · F = 16 (ap_fixed<30,14>) · F = 32 (ap_fixed<46,14>) · referência ideal (float64)