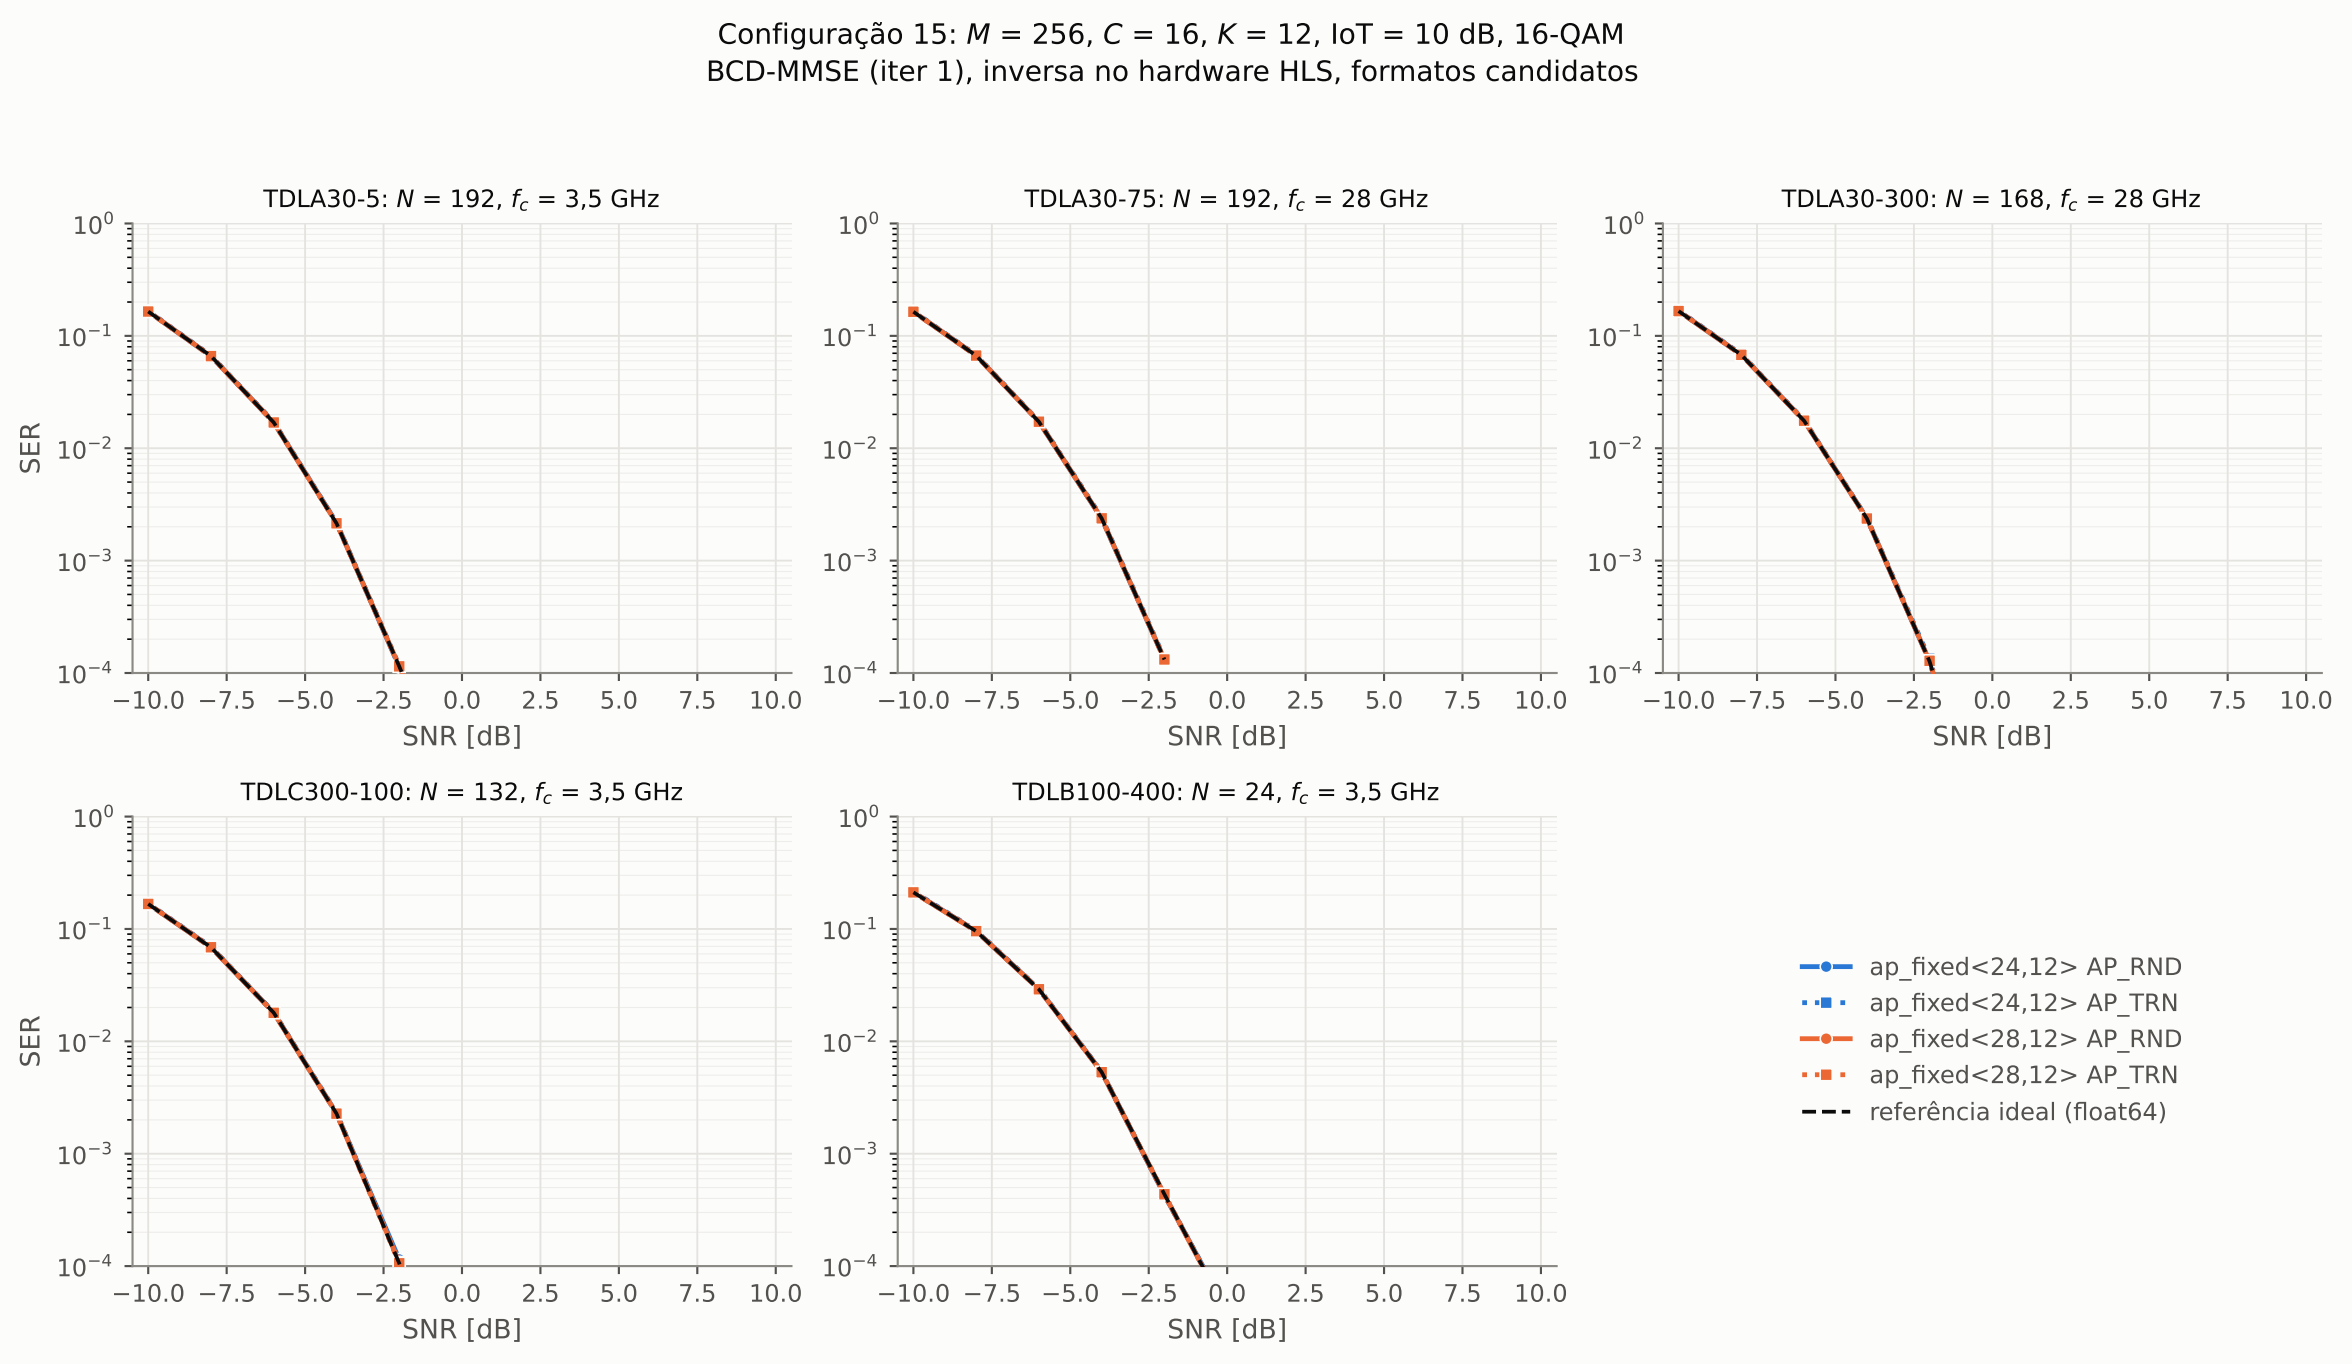
Configuração 15: M = 256, C = 16, K = 12, IoT = 10 dB, 16-QAM
BCD-MMSE (iter 1), inversa no hardware HLS, formatos candidatos
TDLA30-5: N = 192, f_c = 3,5 GHz
TDLA30-75: N = 192, f_c = 28 GHz
TDLA30-300: N = 168, f_c = 28 GHz
TDLC300-100: N = 132, f_c = 3,5 GHz
TDLB100-400: N = 24, f_c = 3,5 GHz
SER
SNR [dB]
ap_fixed<24,12> AP_RND
ap_fixed<24,12> AP_TRN
ap_fixed<28,12> AP_RND
ap_fixed<28,12> AP_TRN
referência ideal (float64)