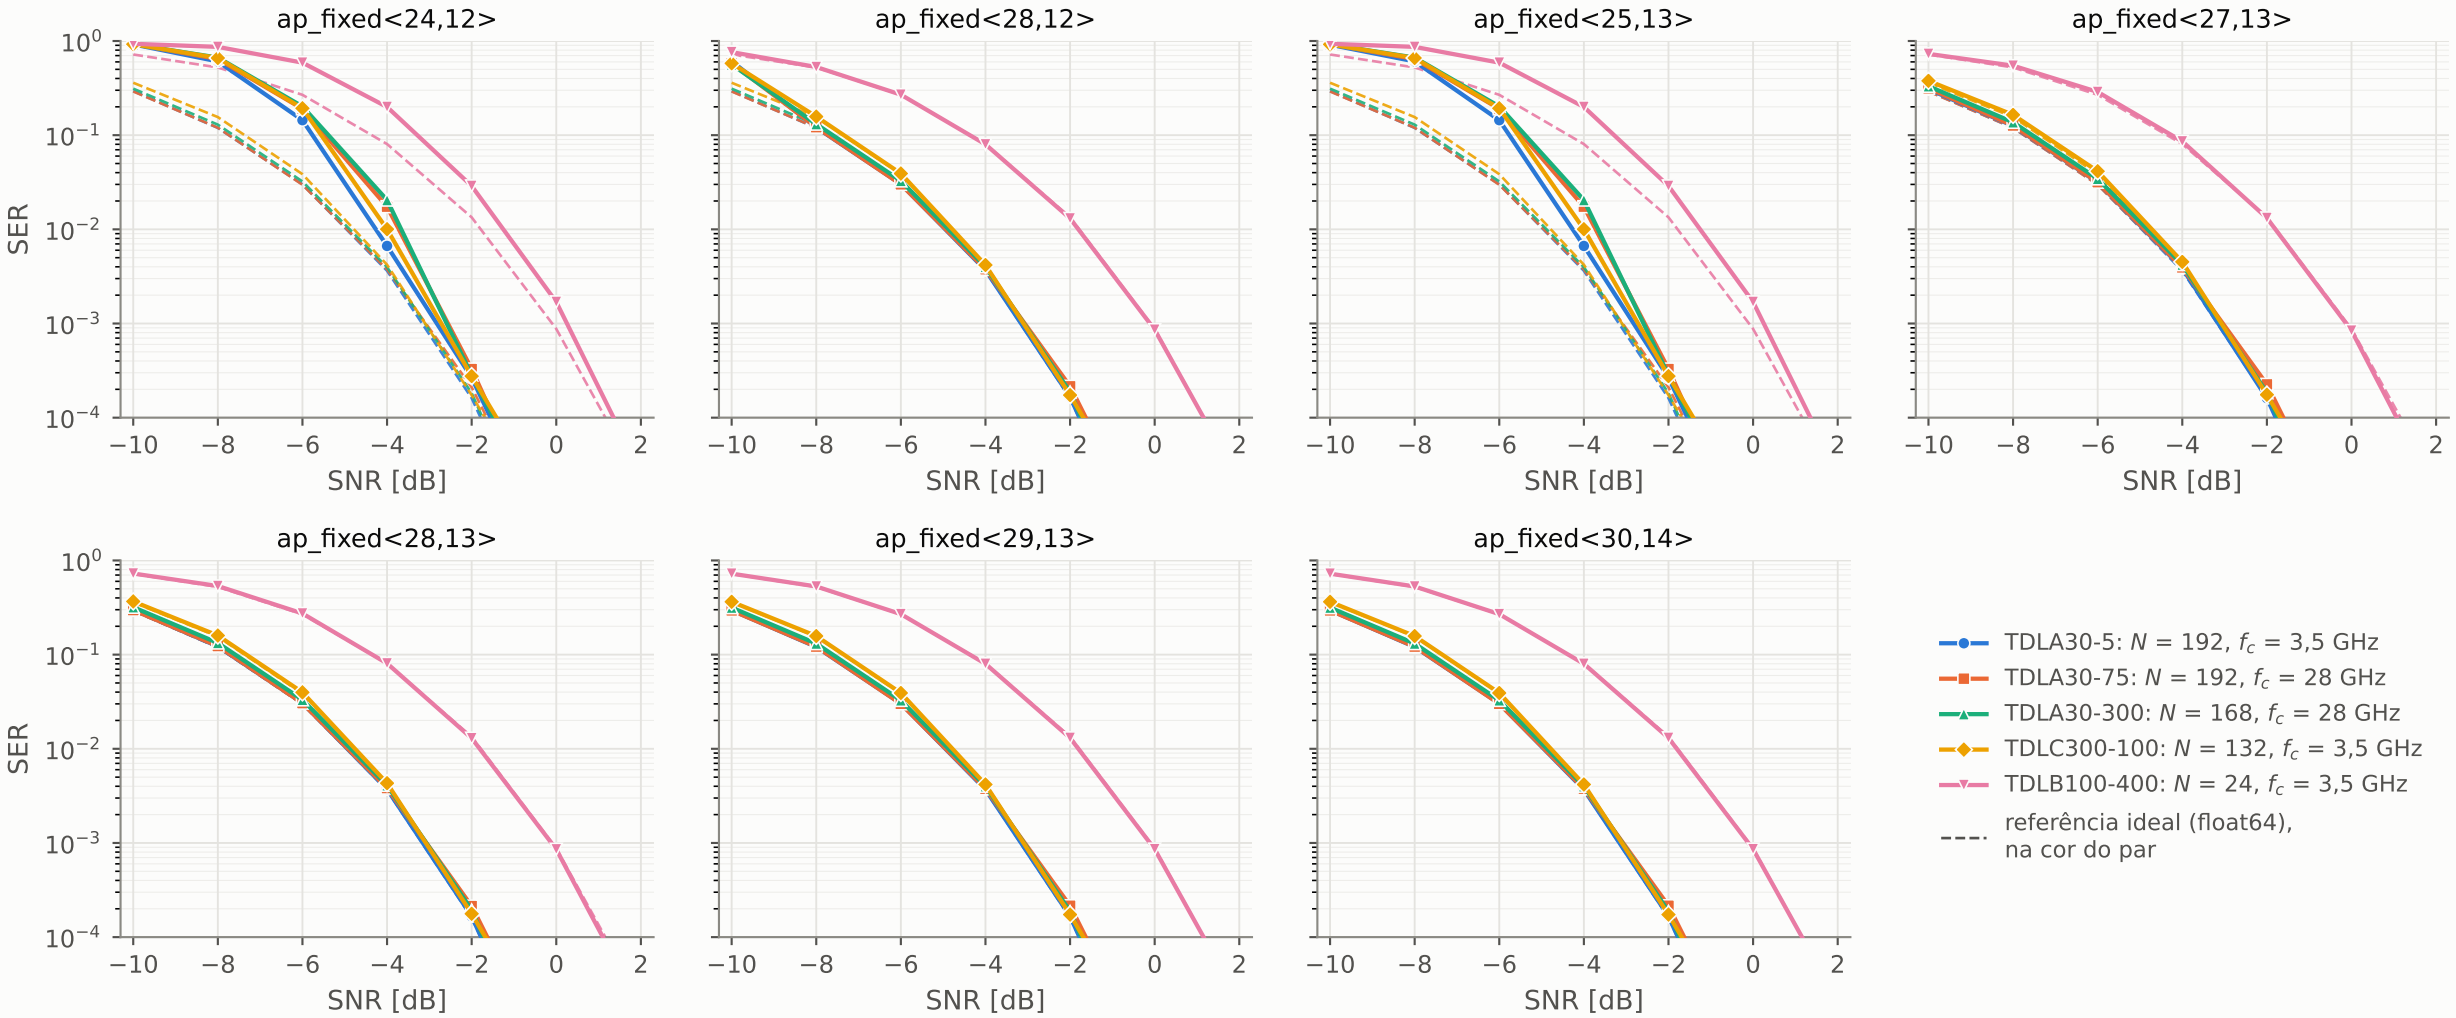
Configuração 16: M = 256, C = 16, K = 12, IoT = 20 dB, 16-QAM
BCD-MMSE (iter 4), inversa no hardware HLS, AP_TRN/AP_SAT
ap_fixed<24,12>
ap_fixed<28,12>
ap_fixed<25,13>
ap_fixed<27,13>
ap_fixed<28,13>
ap_fixed<29,13>
ap_fixed<30,14>
SER
SNR [dB]
TDLA30-5: N = 192, f_c = 3,5 GHz
TDLA30-75: N = 192, f_c = 28 GHz
TDLA30-300: N = 168, f_c = 28 GHz
TDLC300-100: N = 132, f_c = 3,5 GHz
TDLB100-400: N = 24, f_c = 3,5 GHz
referência ideal (float64), na cor do par