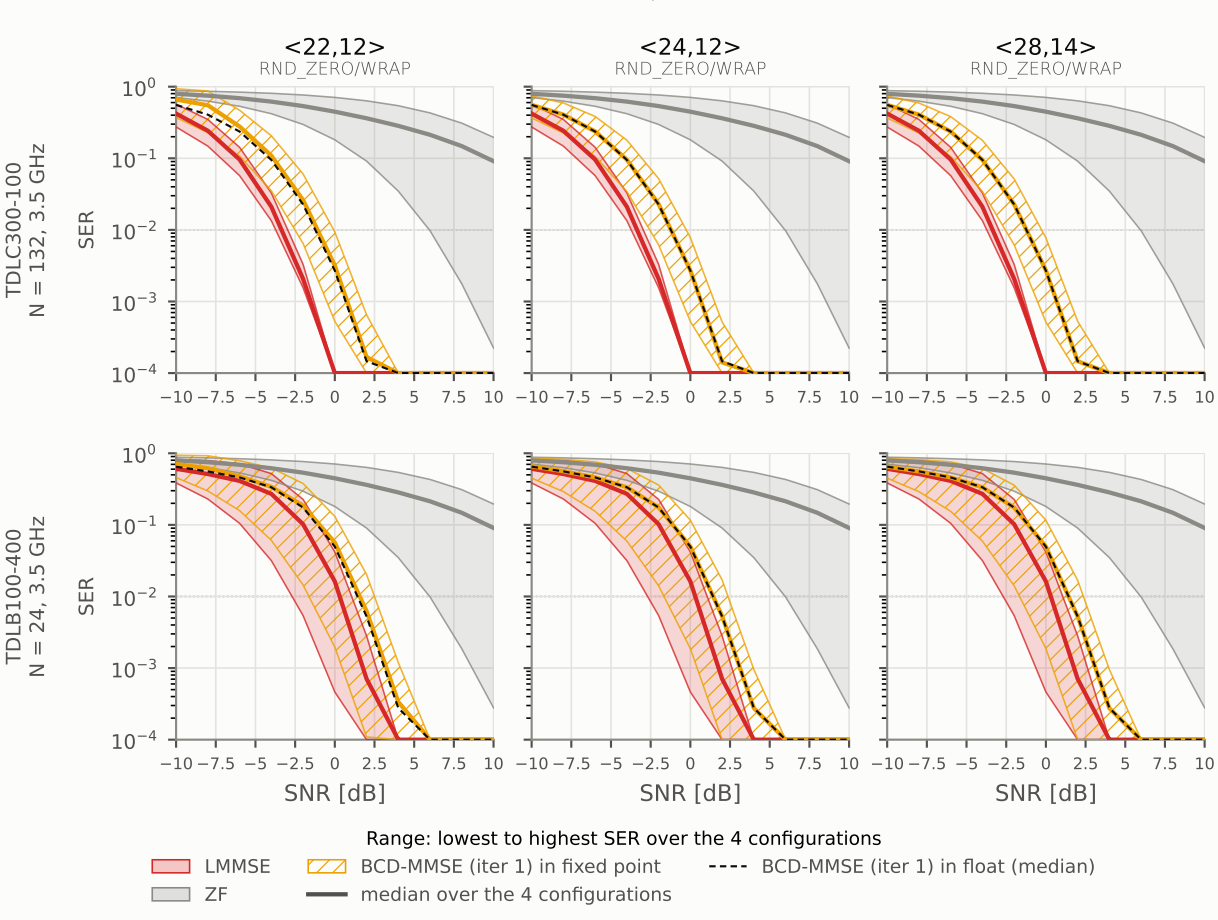
16-QAM: M = 128, C = 8, M_c = 16 | configurations 1A, 1B, 1E, 1F
<22,12>
RND_ZERO/WRAP
<24,12>
RND_ZERO/WRAP
<28,14>
RND_ZERO/WRAP
TDLC300-100
N = 132, 3.5 GHz
TDLB100-400
N = 24, 3.5 GHz
SER
SNR [dB]
Range: lowest to highest SER over the 4 configurations
LMMSE
ZF
BCD-MMSE (iter 1) in fixed point
median over the 4 configurations
BCD-MMSE (iter 1) in float (median)