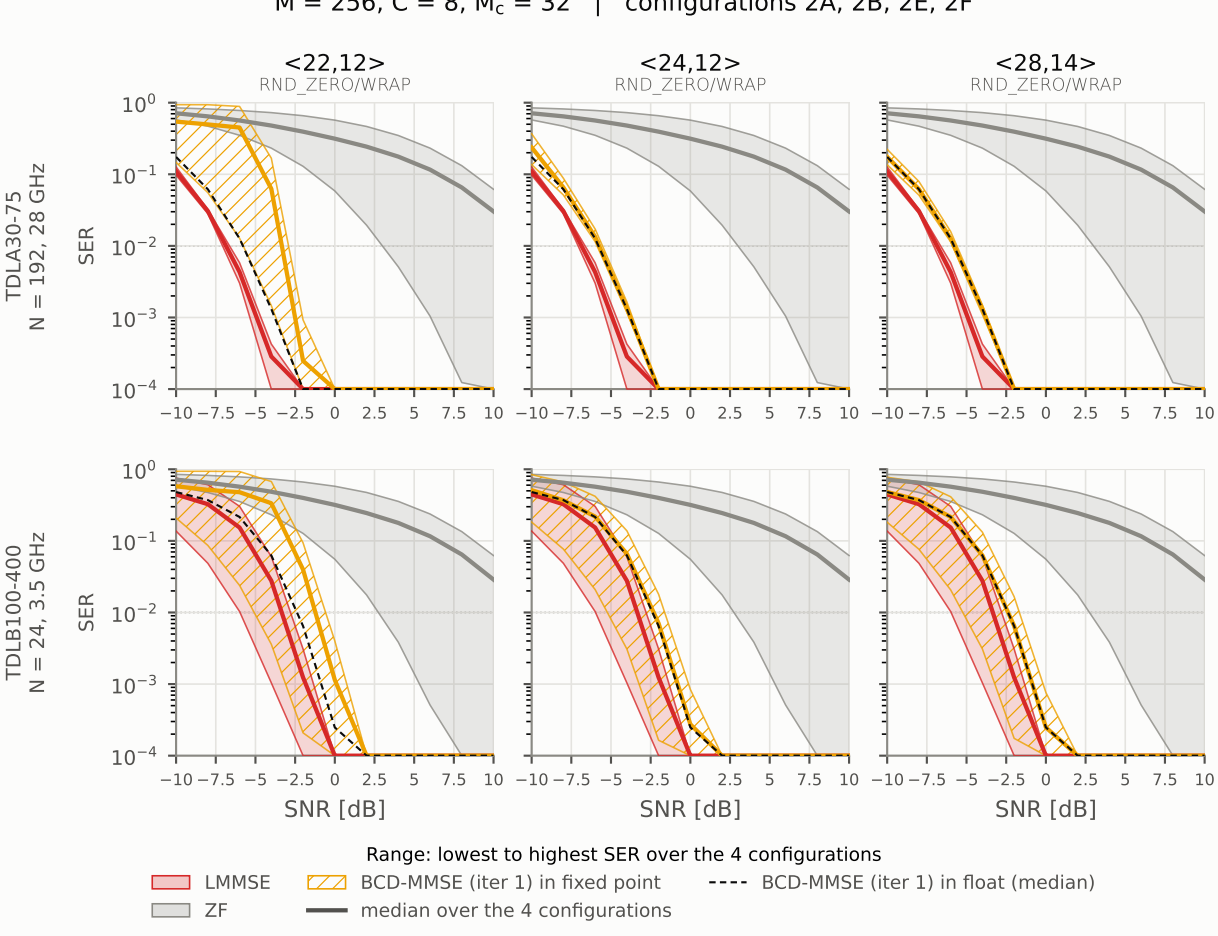
M = 256, C = 8, M_c = 32 | configurations 2A, 2B, 2E, 2F
<22,12>
RND_ZERO/WRAP
<24,12>
RND_ZERO/WRAP
<28,14>
RND_ZERO/WRAP
TDLA30-75
N = 192, 28 GHz
TDLB100-400
N = 24, 3.5 GHz
SER
SNR [dB]
Range: lowest to highest SER over the 4 configurations
LMMSE
ZF
BCD-MMSE (iter 1) in fixed point
median over the 4 configurations
BCD-MMSE (iter 1) in float (median)