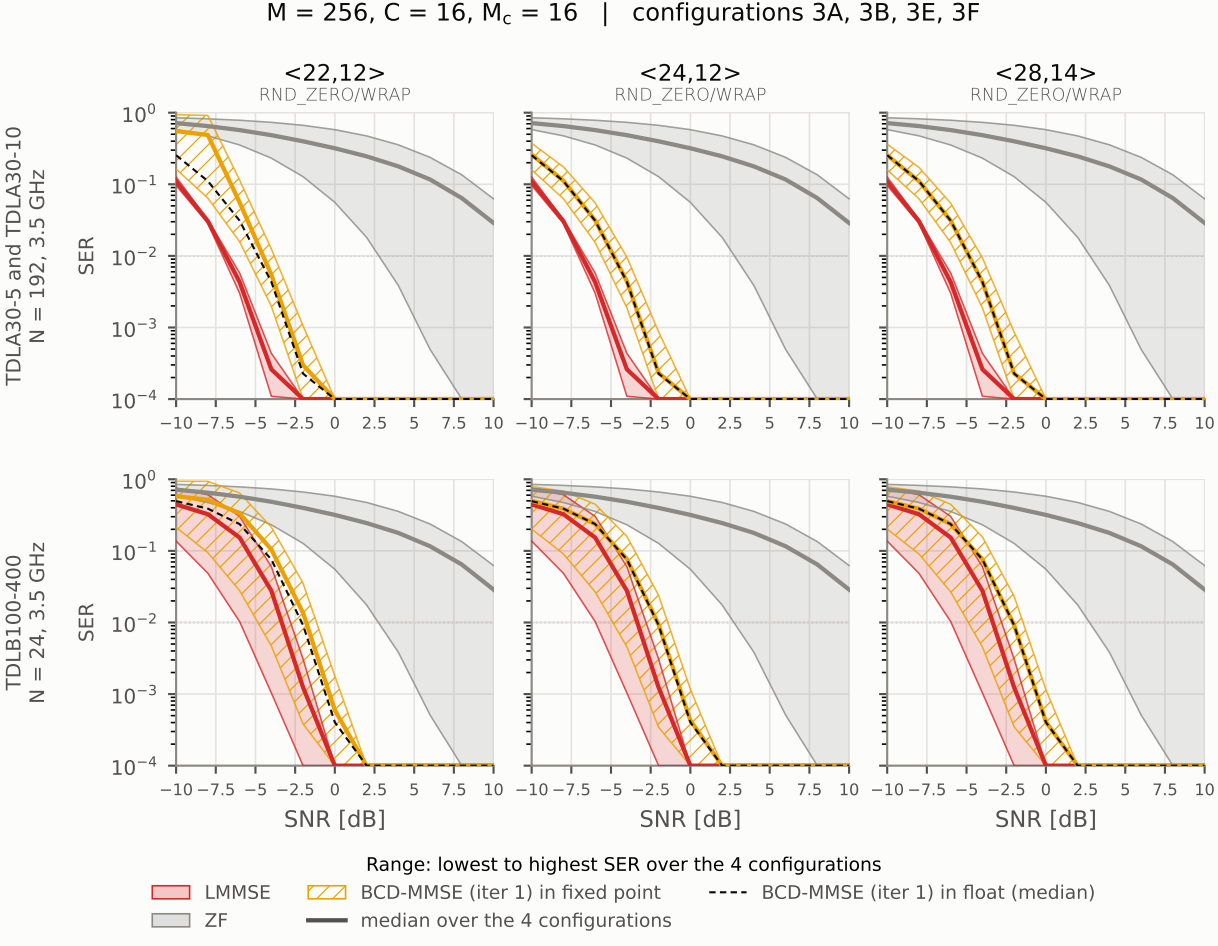
M = 256, C = 16, M_c = 16 | configurations 3A, 3B, 3E, 3F
<22,12>
RND_ZERO/WRAP
<24,12>
RND_ZERO/WRAP
<28,14>
RND_ZERO/WRAP
TDLA30-5 and TDLA30-10
N = 192, 3.5 GHz
TDLB100-400
N = 24, 3.5 GHz
SER
SNR [dB]
Range: lowest to highest SER over the 4 configurations
LMMSE
ZF
BCD-MMSE (iter 1) in fixed point
median over the 4 configurations
BCD-MMSE (iter 1) in float (median)