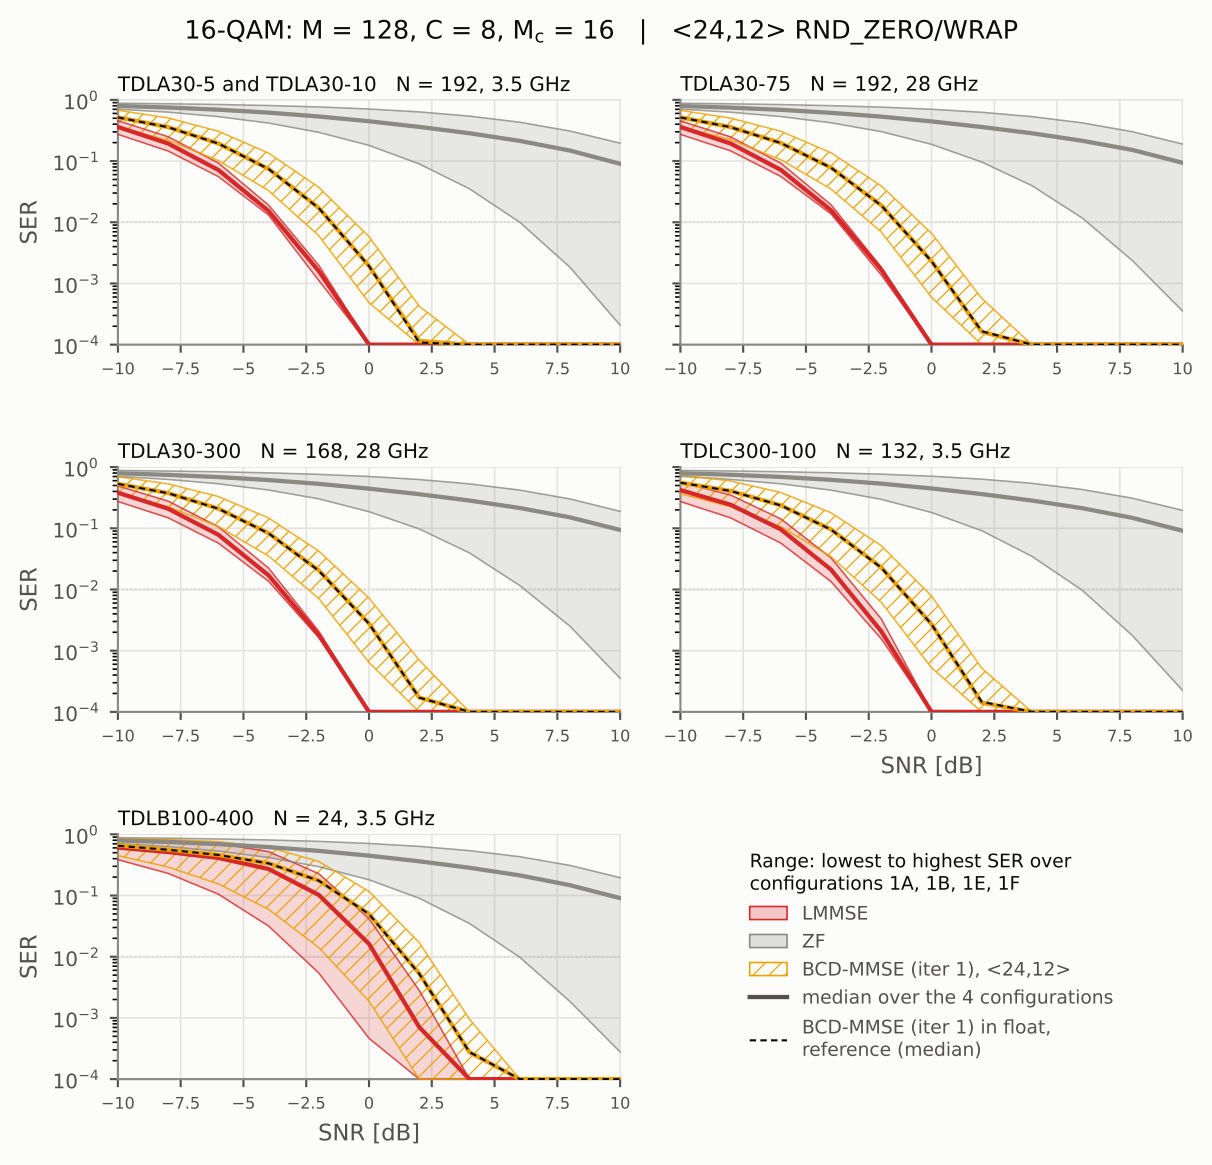
16-QAM: M = 128, C = 8, M_c = 16 | <24,12> RND_ZERO/WRAP
TDLA30-5 and TDLA30-10 N = 192, 3.5 GHz
TDLA30-75 N = 192, 28 GHz
TDLA30-300 N = 168, 28 GHz
TDLC300-100 N = 132, 3.5 GHz
TDLB100-400 N = 24, 3.5 GHz
SER
SNR [dB]
Range: lowest to highest SER over configurations 1A, 1B, 1E, 1F
LMMSE
ZF
BCD-MMSE (iter 1), <24,12>
median over the 4 configurations
BCD-MMSE (iter 1) in float, reference (median)