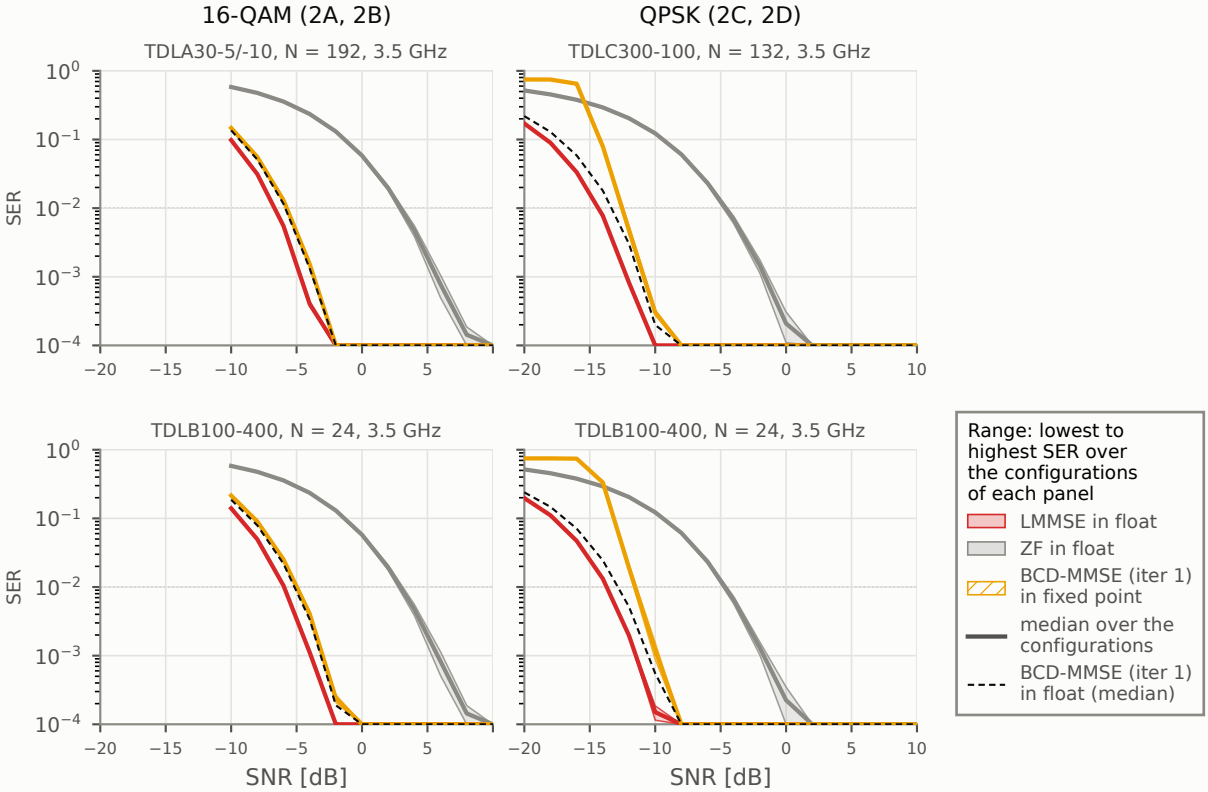
16-QAM (2A, 2B)
QPSK (2C, 2D)
TDLA30-5/-10, N = 192, 3.5 GHz
TDLC300-100, N = 132, 3.5 GHz
TDLB100-400, N = 24, 3.5 GHz
TDLB100-400, N = 24, 3.5 GHz
SER
SNR [dB]
Range: lowest to highest SER over the configurations of each panel
LMMSE in float
ZF in float
BCD-MMSE (iter 1) in fixed point
median over the configurations
BCD-MMSE (iter 1) in float (median)