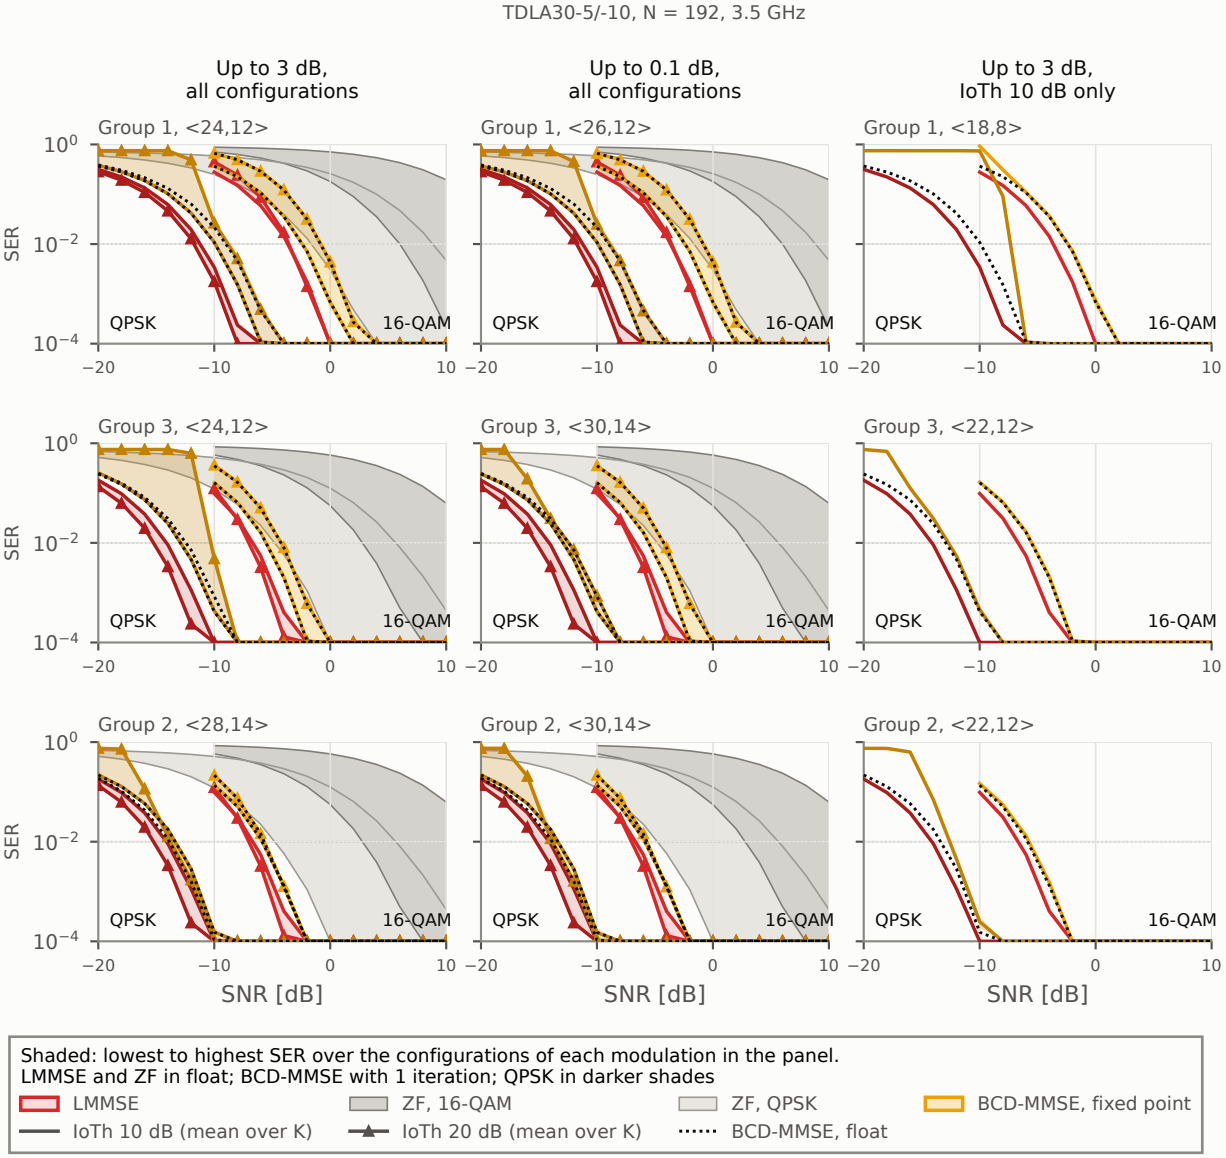
TDLA30-5/-10, N = 192, 3.5 GHz
Up to 3 dB, all configurations
Up to 0.1 dB, all configurations
Up to 3 dB, IoTh 10 dB only
Group 1, <24,12>
Group 1, <26,12>
Group 1, <18,8>
Group 3, <24,12>
Group 3, <30,14>
Group 3, <22,12>
Group 2, <28,14>
Group 2, <30,14>
Group 2, <22,12>
SER
SNR [dB]
QPSK
16-QAM
Shaded: lowest to highest SER over the configurations of each modulation in the panel.
LMMSE and ZF in float; BCD-MMSE with 1 iteration; QPSK in darker shades
LMMSE
ZF, 16-QAM
ZF, QPSK
BCD-MMSE, fixed point
IoTh 10 dB (mean over K)
IoTh 20 dB (mean over K)
BCD-MMSE, float