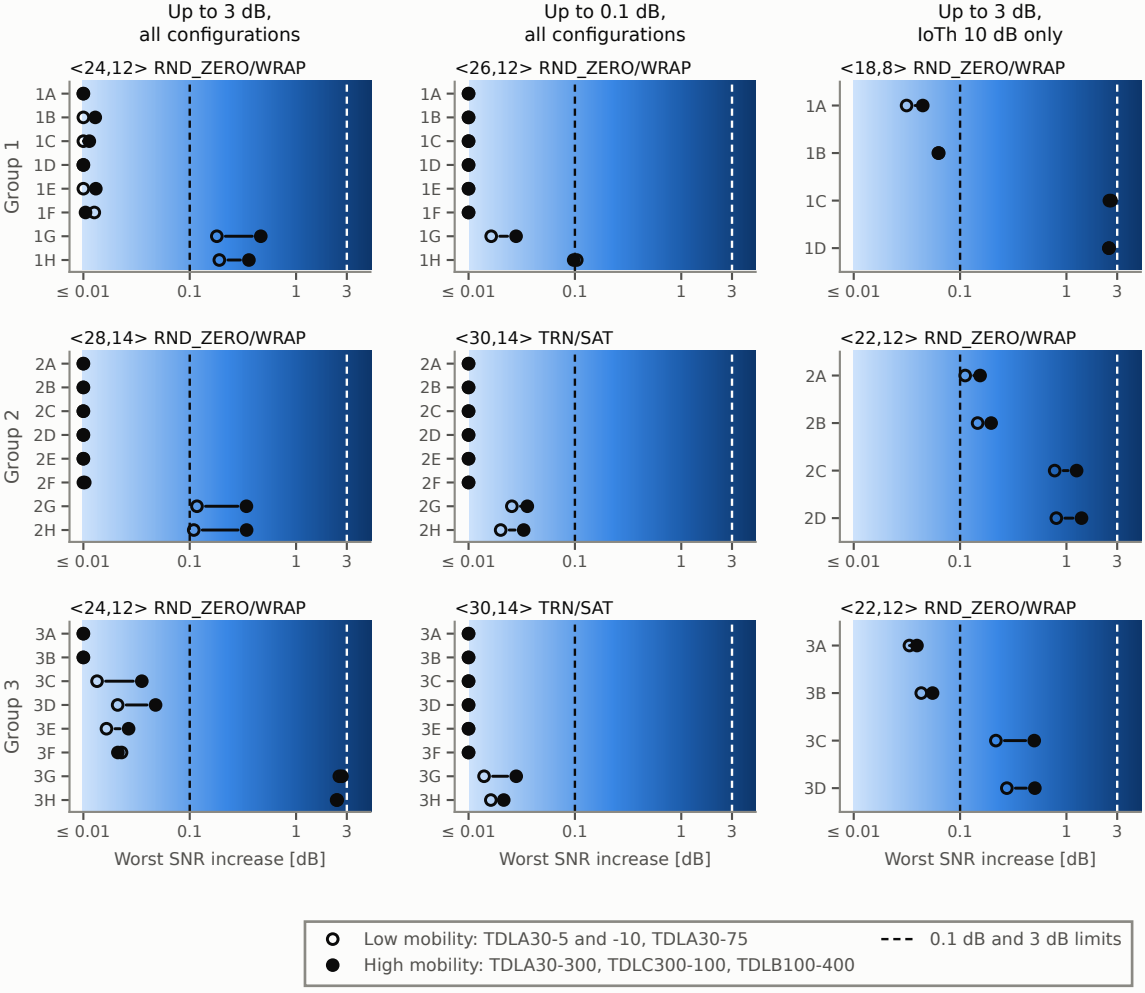
Up to 3 dB, all configurations
Up to 0.1 dB, all configurations
Up to 3 dB, IoTh 10 dB only
<24,12> RND_ZERO/WRAP
<26,12> RND_ZERO/WRAP
<18,8> RND_ZERO/WRAP
<28,14> RND_ZERO/WRAP
<30,14> TRN/SAT
<22,12> RND_ZERO/WRAP
<24,12> RND_ZERO/WRAP
<30,14> TRN/SAT
<22,12> RND_ZERO/WRAP
Group 1
Group 2
Group 3
1A 1B 1C 1D 1E 1F 1G 1H
2A 2B 2C 2D 2E 2F 2G 2H
3A 3B 3C 3D 3E 3F 3G 3H
≤ 0.01
0.1
1
3
Worst SNR increase [dB]
Low mobility: TDLA30-5 and -10, TDLA30-75
High mobility: TDLA30-300, TDLC300-100, TDLB100-400
0.1 dB and 3 dB limits