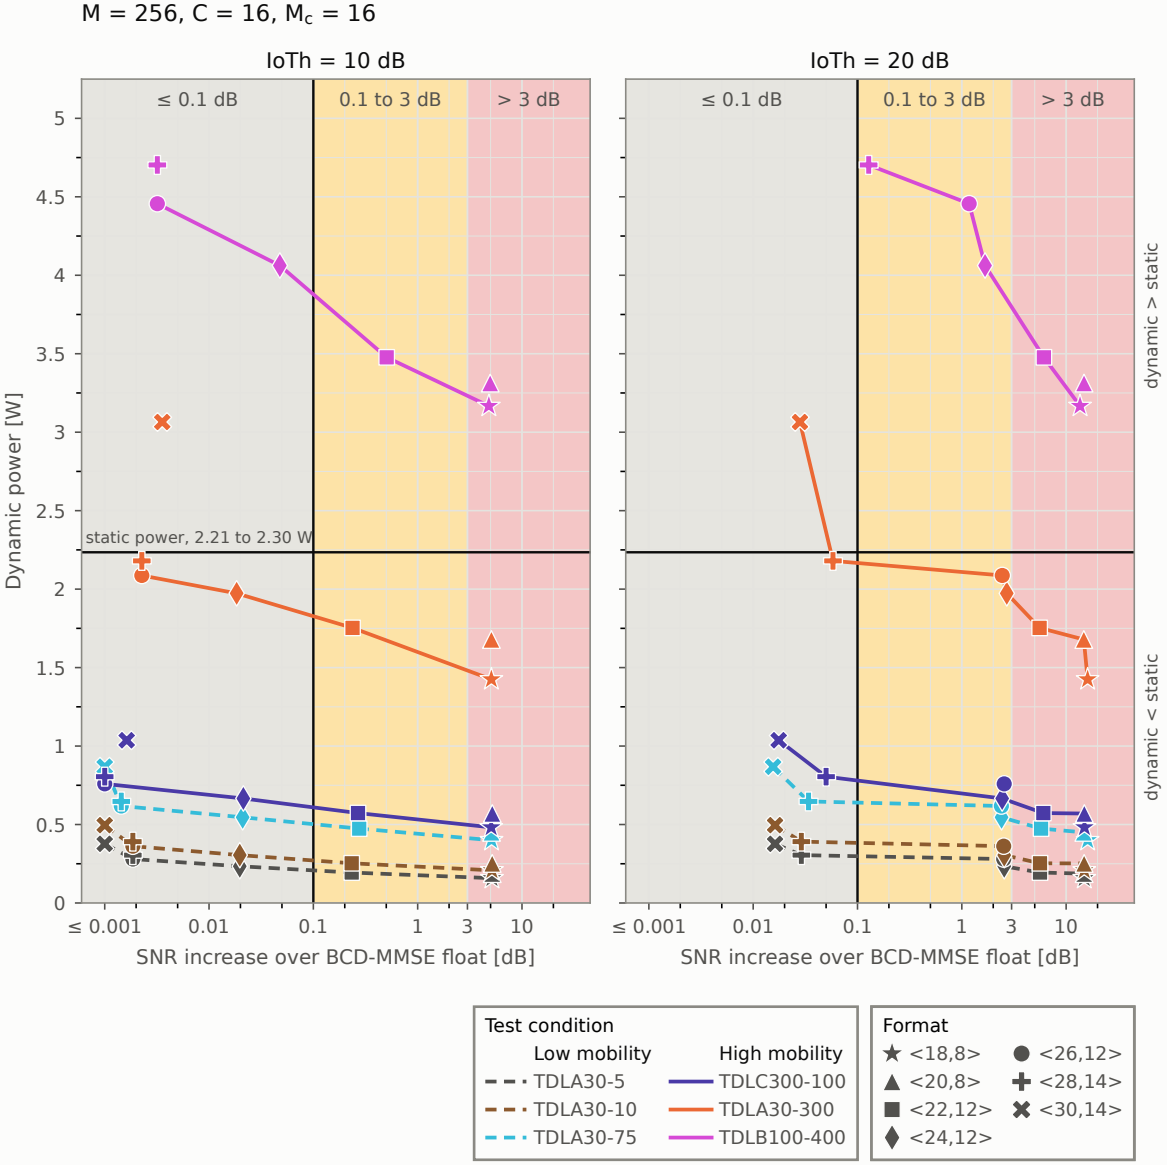
M = 256, C = 16, M_c = 16
IoTh = 10 dB
IoTh = 20 dB
≤ 0.1 dB
0.1 to 3 dB
> 3 dB
Dynamic power [W]
static power, 2.21 to 2.30 W
dynamic > static
dynamic < static
SNR increase over BCD-MMSE float [dB]
≤ 0.001
0.01
0.1
1
3
10
Test condition
Low mobility
High mobility
TDLA30-5
TDLA30-10
TDLA30-75
TDLC300-100
TDLA30-300
TDLB100-400
Format
<18,8>
<20,8>
<22,12>
<24,12>
<26,12>
<28,14>
<30,14>