

TL3_PaulinoImbo_2230075_2232626 / PLC_1 [CPU 1516-3 PN/DP] / Program blocks

Main [OB1]

Main Properties

General

Name	Main	Number	1	Type	OB	Language	LAD
Numbering	Automatic						


Information

Title	"Main Program Sweep (Cycle)"	Author		Comment		Family	
Version	0.1	User-defined ID					


Main

Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
▼ Temp			
temp_f1	Bool		
temp_f2	Bool		
temp_f6	Bool		
temp_f3	Bool		
temp_f7	Bool		
temp_f4	Bool		
temp_f5	Bool		
temp_f0	Bool		
Constant			


Network 1:

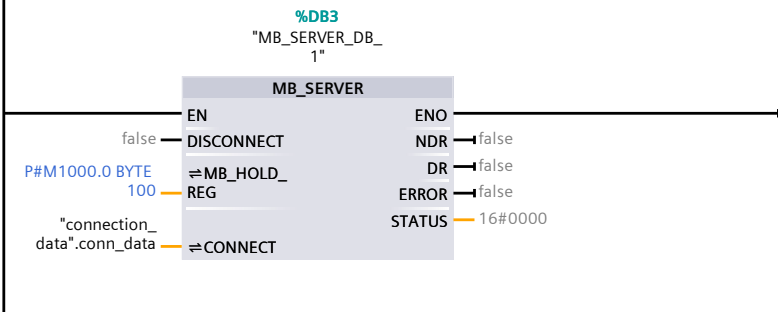


Network 2: Alimentação do plástico

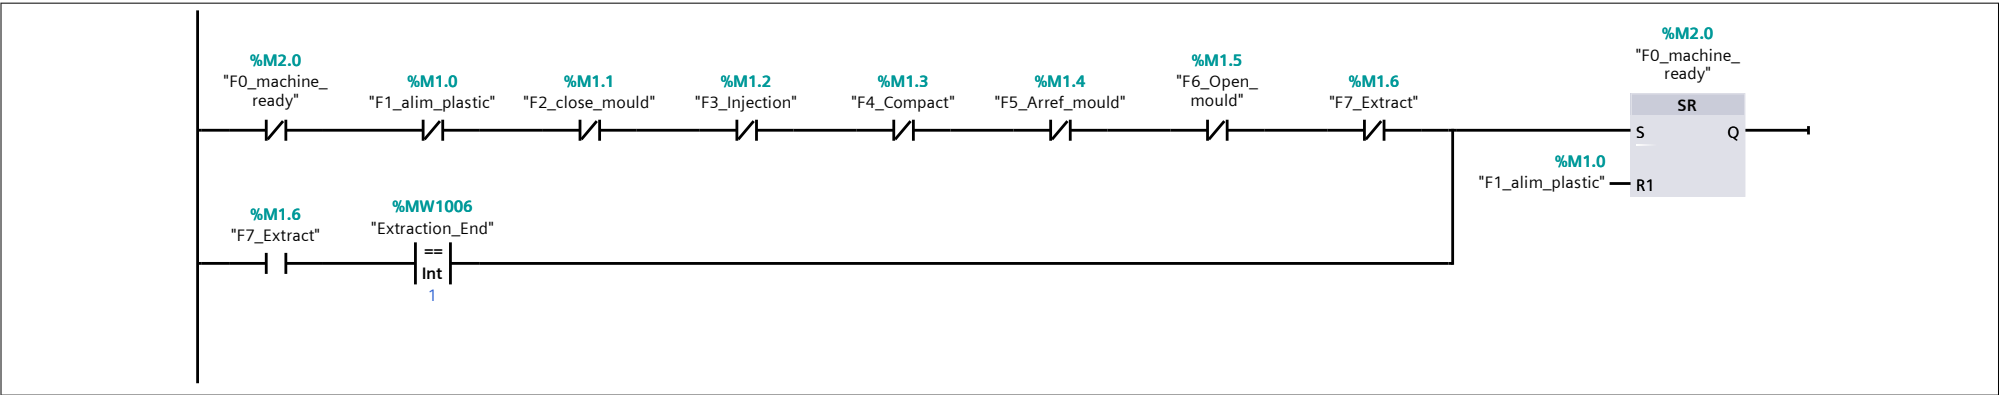


Network 3: Etapa 1

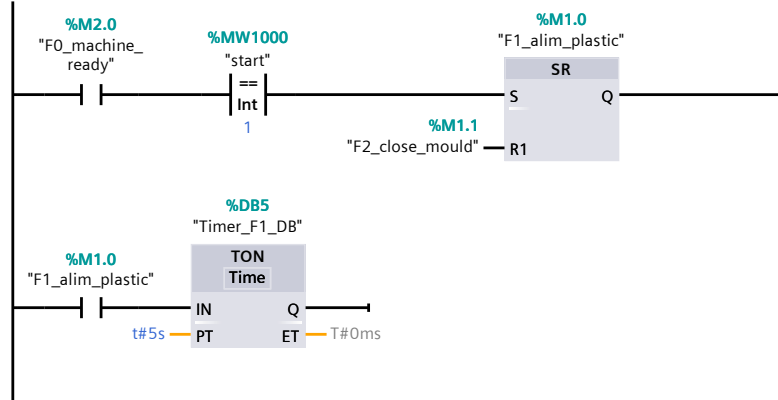


Network 4: Etapa 2

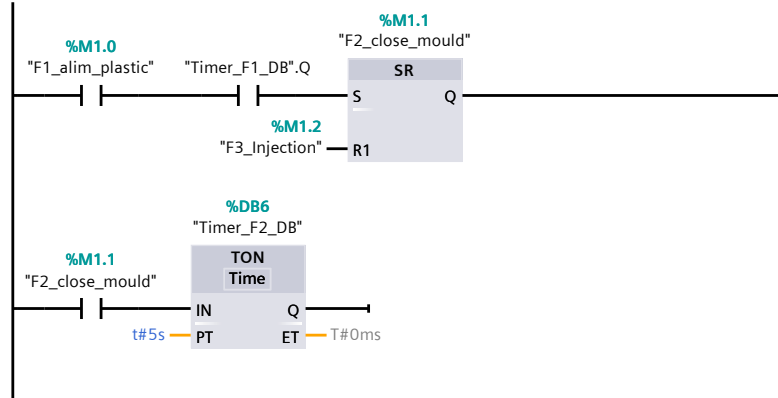


Network 5: Etapa 3

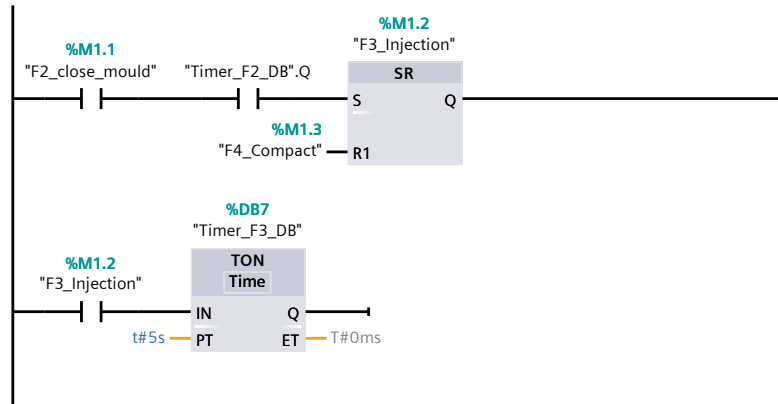


Network 6: Etapa 4

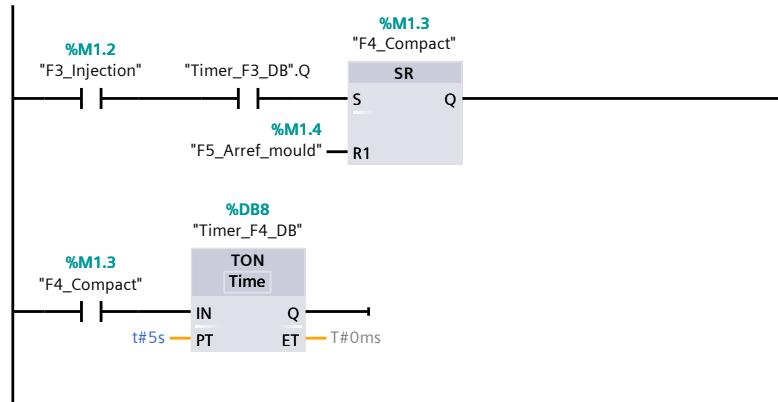


Network 7: Etapa 5

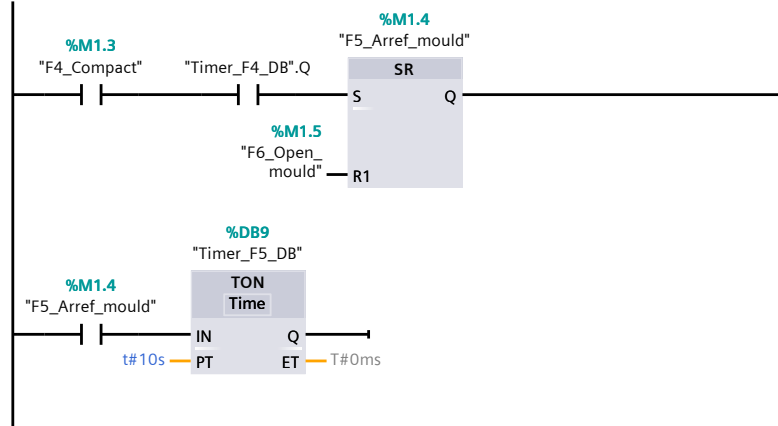

Network 8: Etapa 6

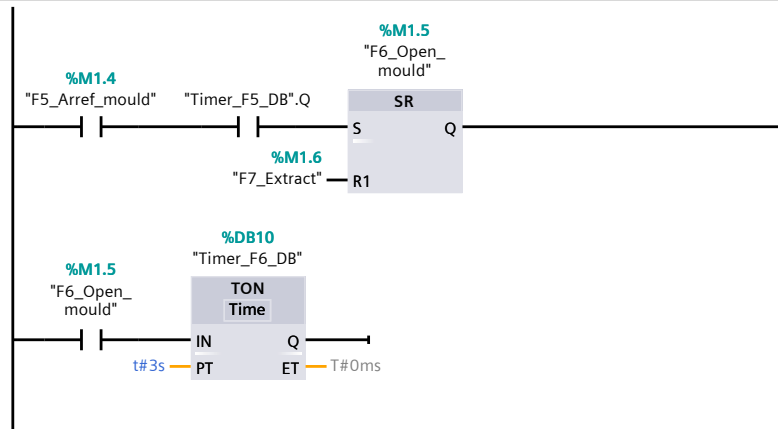


Network 9: Etapa 7

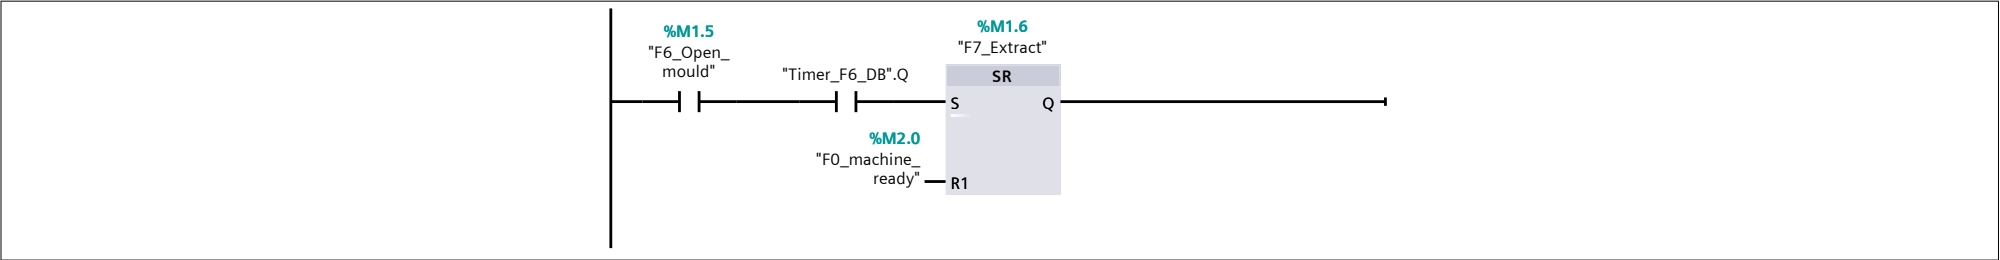

Network 10: Código auxiliar para a o contador de etapa.


O bloco R_TRIG serve para dar um único sinal positivo à variável desejada. É recomendável o uso deste bloco quando a variável desejada se encontra ligada juntamente com um timer que faz com que a variável fique ligada durante um certo período de tempo.

Network 10: Código auxiliar para a o contador de etapa. (1.1 / 2.1)

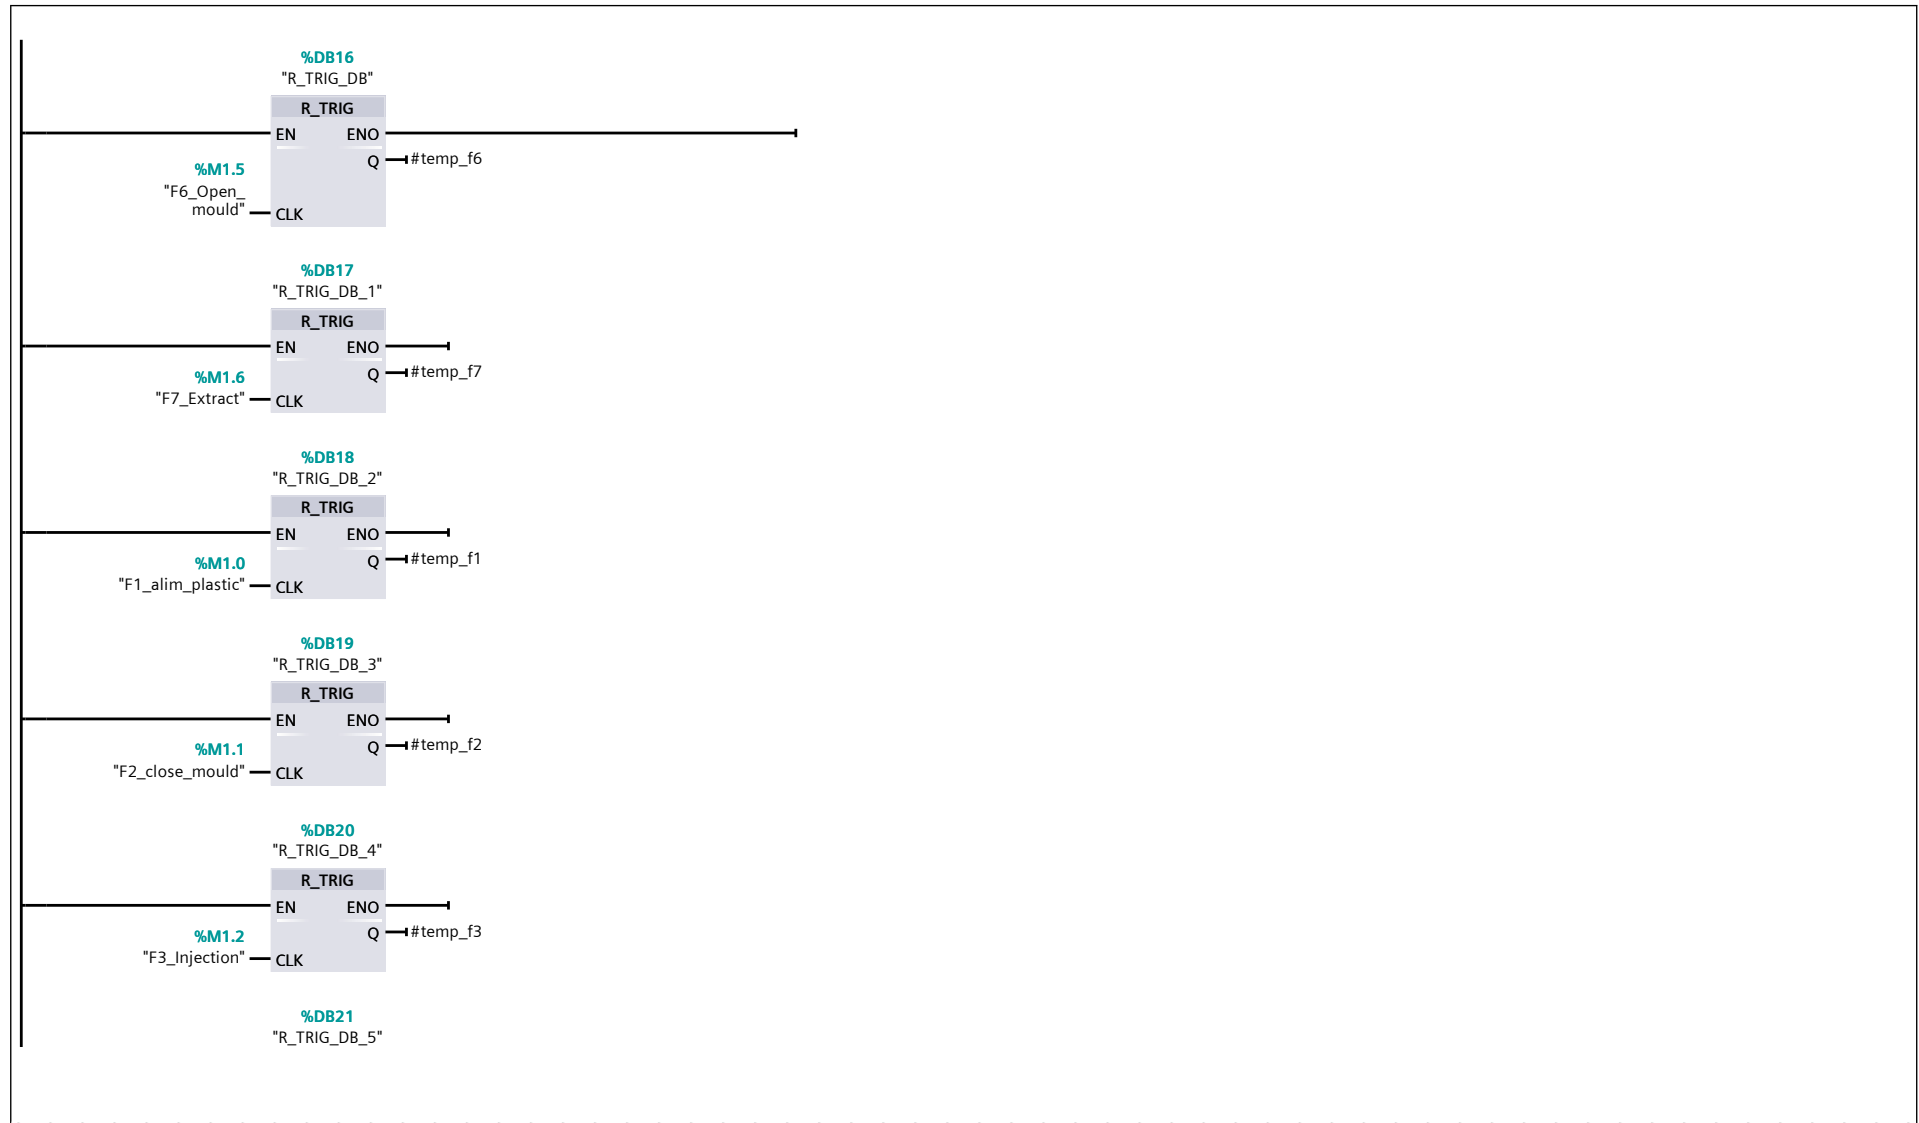


Network 10: Código auxiliar para a o contador de etapa. (2.1 / 2.1)

1.1 (Page1 - 7)

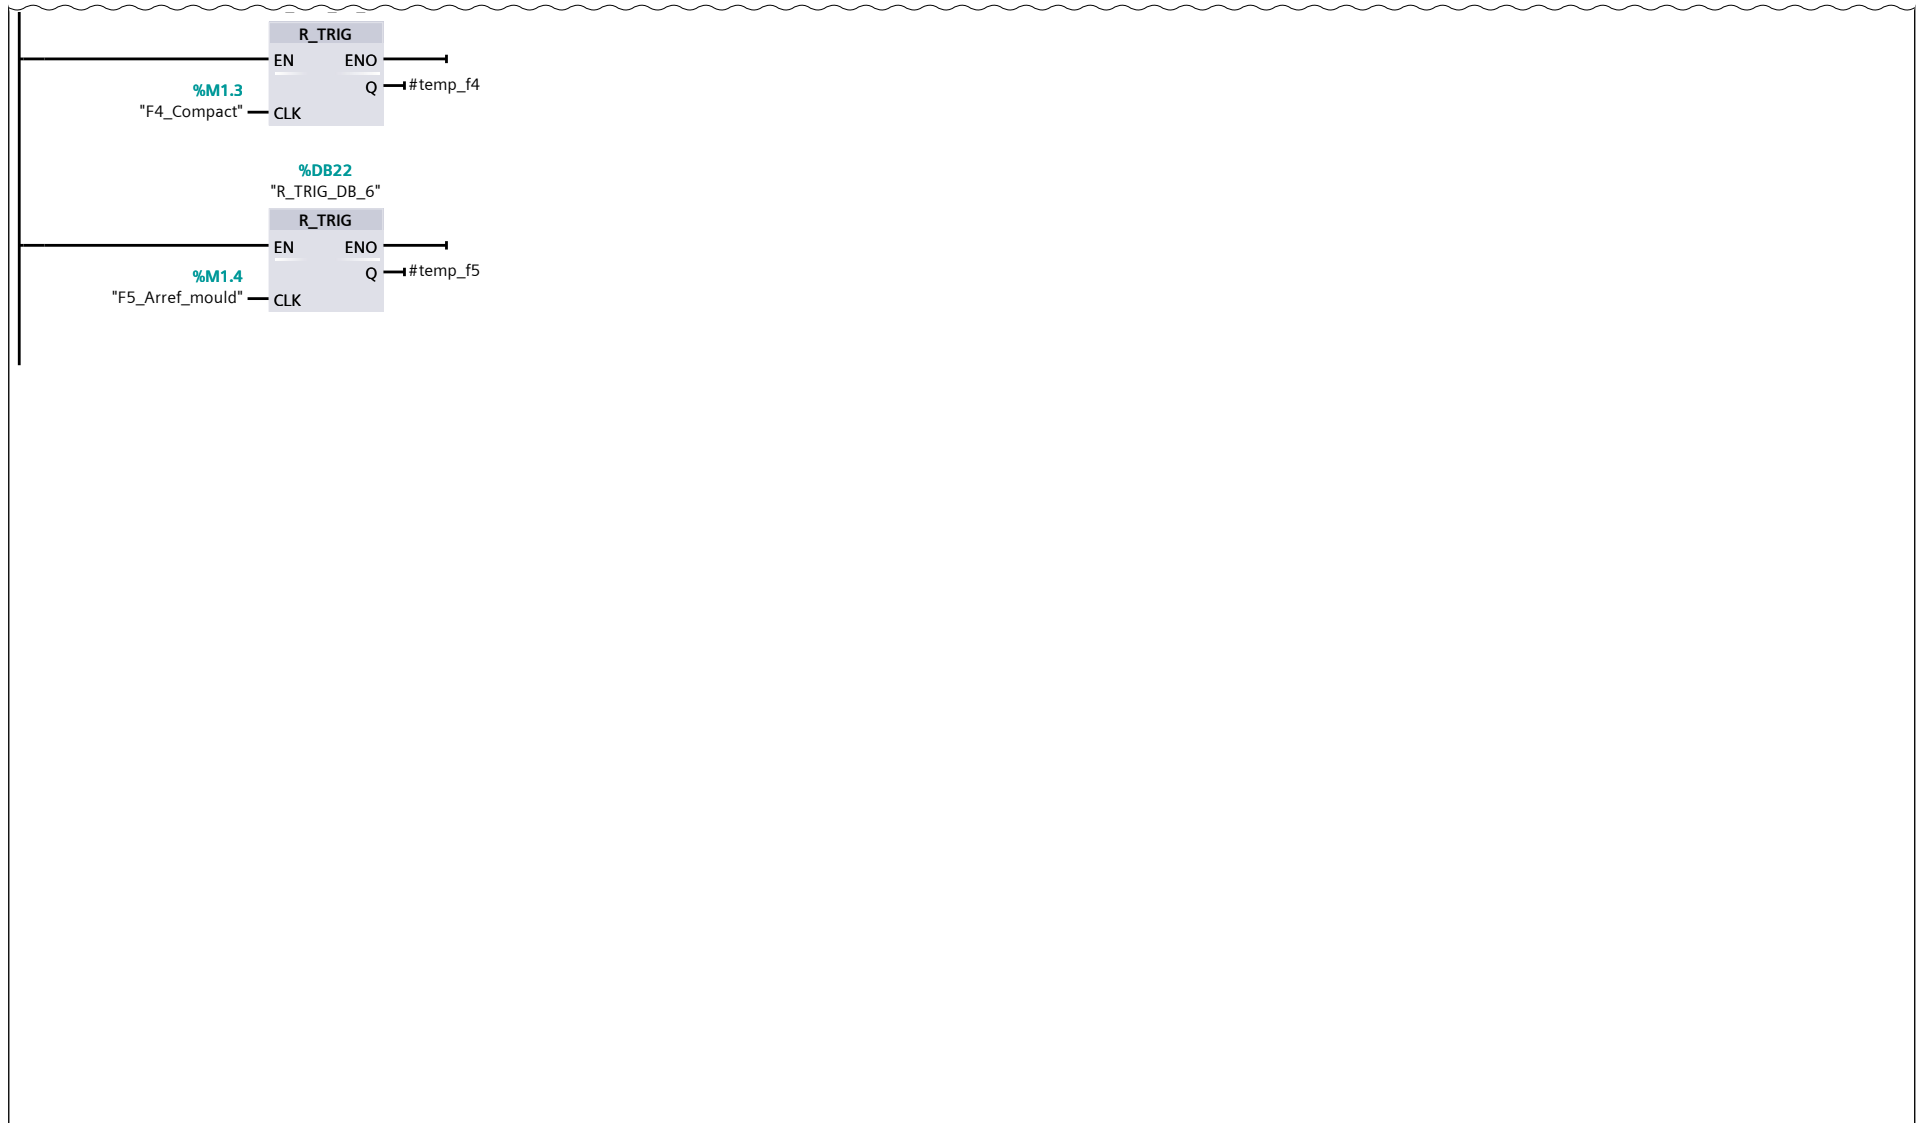

Totally Integrated Automation Portal		
Network 11: Contador para mostrar em que etapa está o processo de injeção Contador de		

Network 11: Contador para mostrar em que etapa está o processo de injeção (1.1 / 2.1)

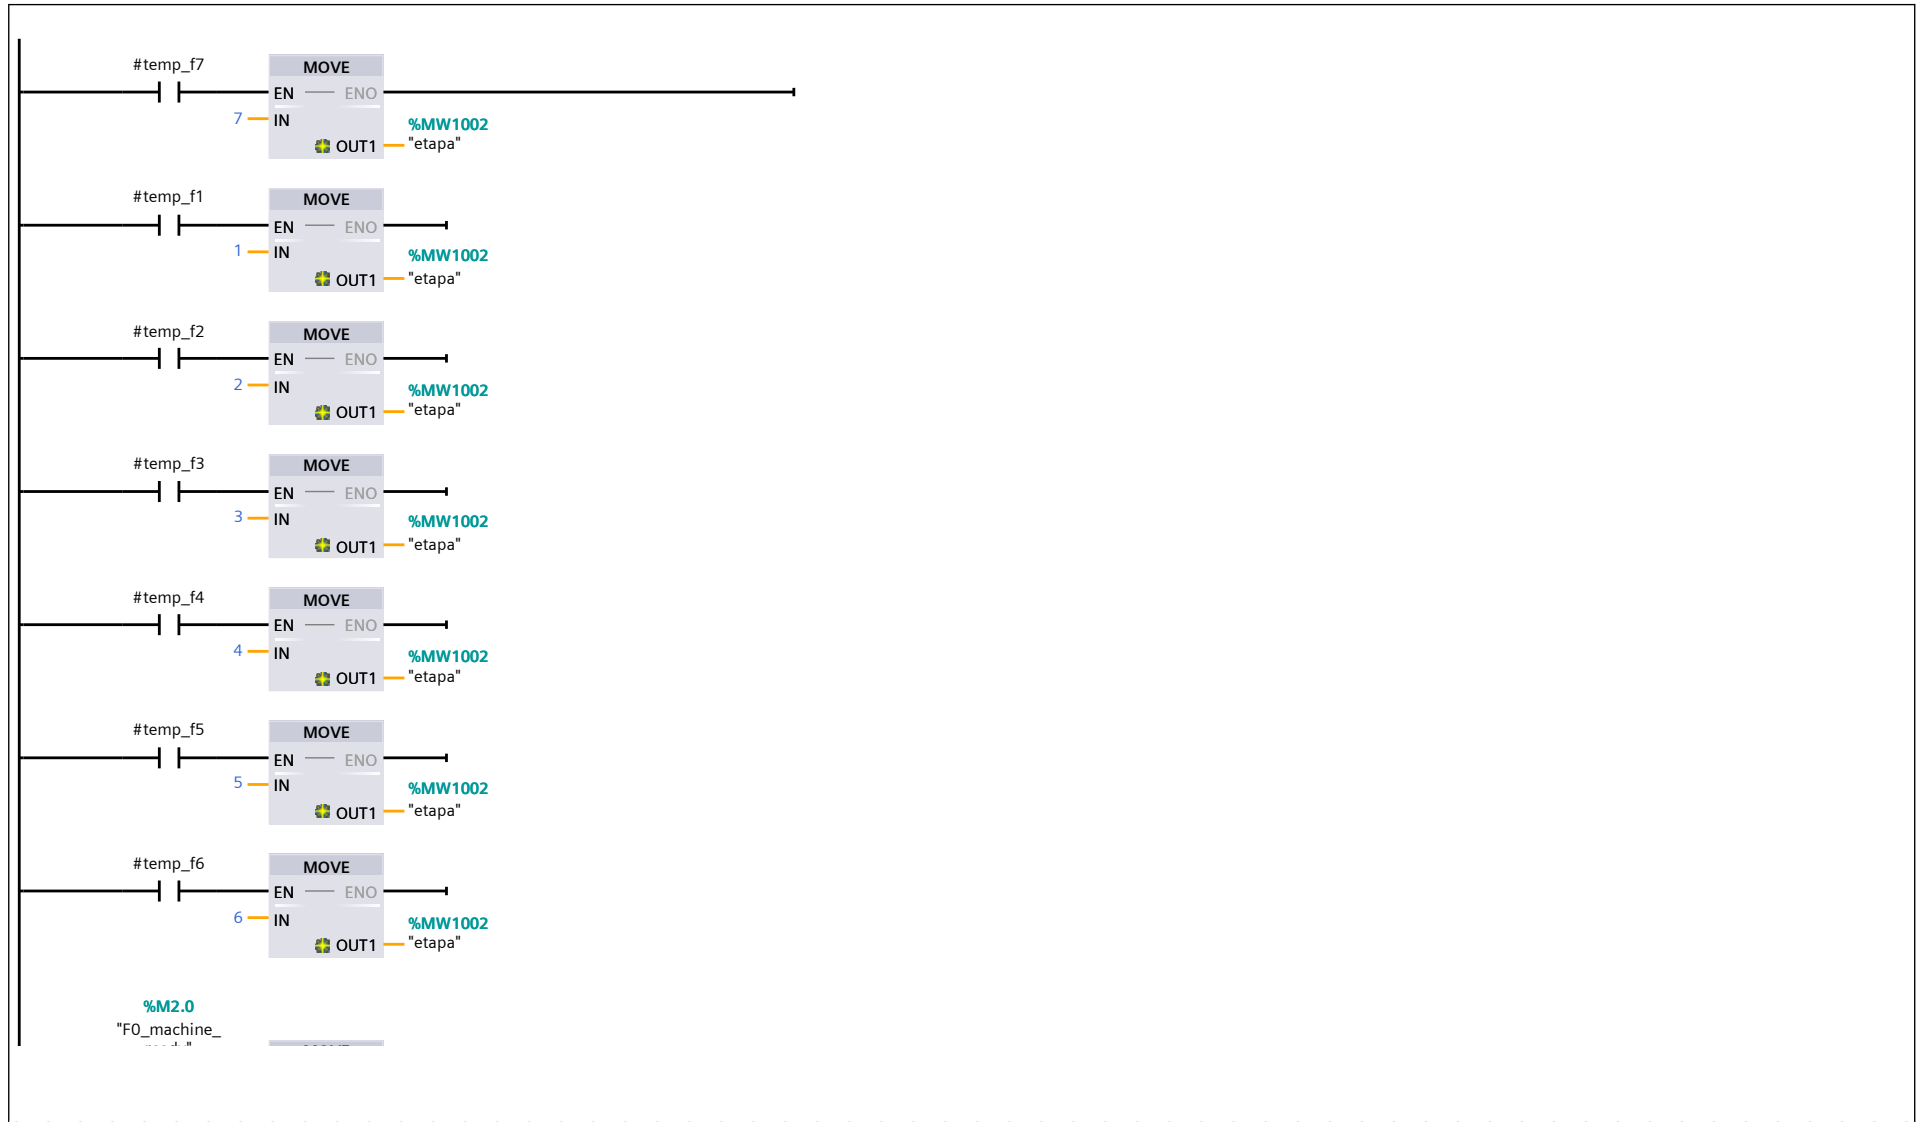

Network 11: Contador para mostrar em que etapa está o processo de injeção (2.1 / 2.1)

1.1 (Page1 - 10)

