

Battery Drive Cycle Performance Report

Cycle_1_25degC (2026-06-15)


Test Summary

Executive Metrics


Cell Model: PF_Cell_01
Drive Cycle: Cycle_1_25degC
Test Date: 2026-06-15
Duration: 10983.91 s

Capacity Discharged	2.6967 Ah
Energy Delivered	9.916 Wh
Peak Discharge Current	20.55 A
Peak Regen Current	10.56 A
Voltage Sag	1.6164 V
Peak Temperature	30.02 °C
Delta Temperature	8.24 °C
Average C-Rate	0.4977 C

1. Applied Load Profile

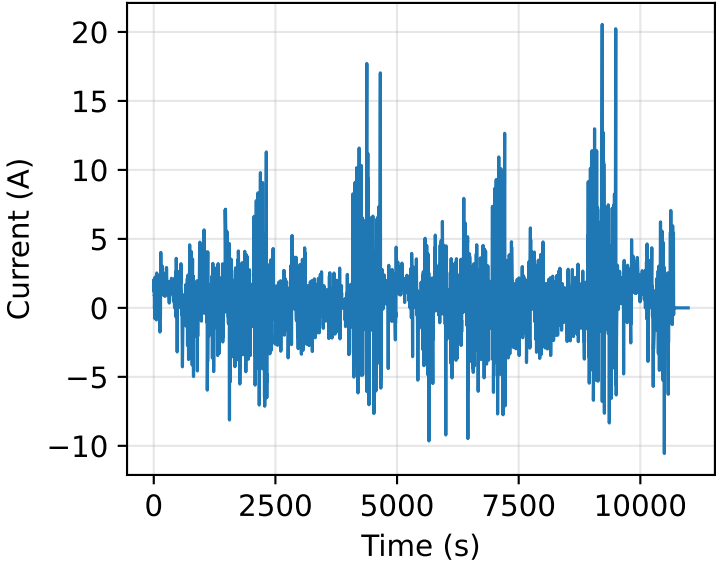


2. Electrical Response

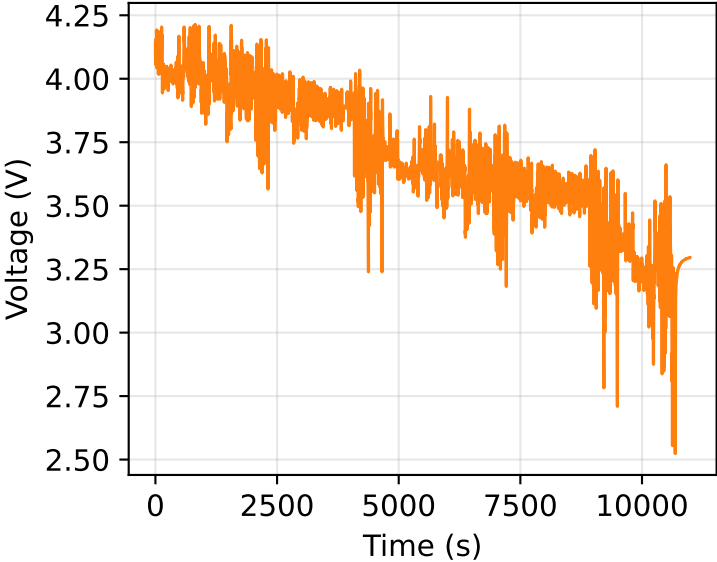


Battery Drive Cycle Performance Report (cont.)

Cycle_1_25degC (2026-06-15)


3. State of Charge Depletion

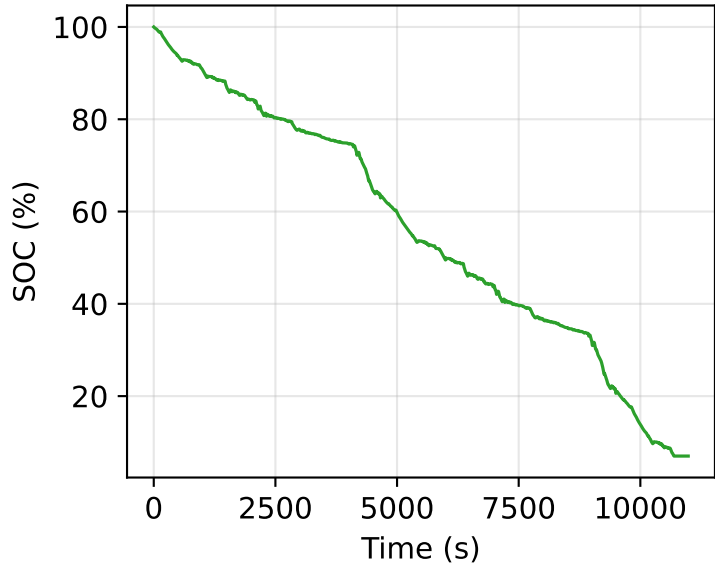

4. Thermal Response

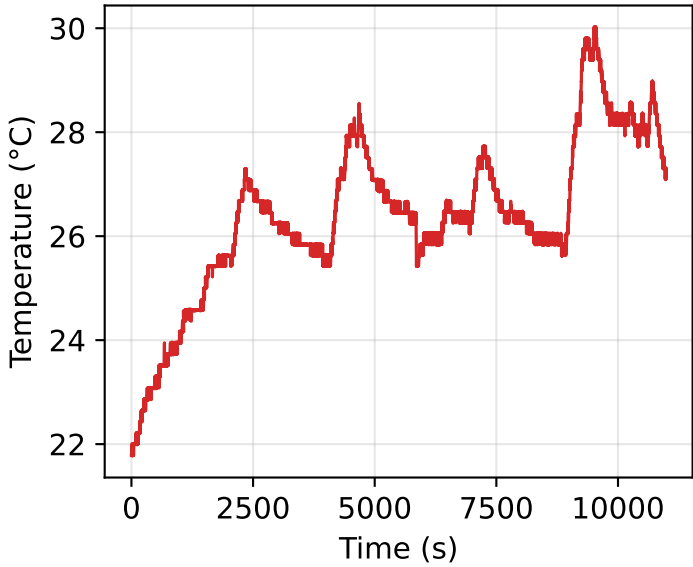

5. Characteristic Curve

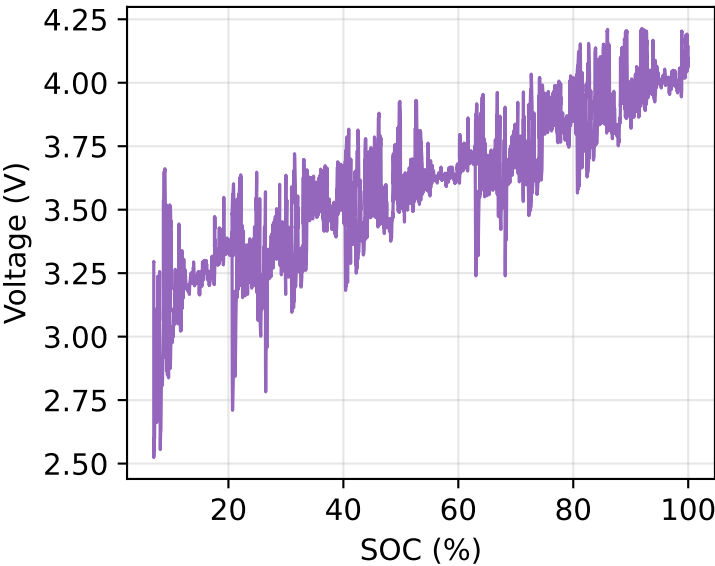

Data Processing Notes

Filtering: Savitzky-Golay (window=11, polyorder=3) applied to V,I
Normalization: {'Vmax': 4.2, 'Vmin': 2.5, 'Imax': 25.0, 'Imin': -25.0, 'Tmax': 45.0, 'Tmin': 15.0}
SOC Method: Coulomb Counting (Initial SOC inferred from Ah column)