


Configure components of Wireless LAN access for client , Connectivity Using ,GUI only such as WLAN creation ,Security settings ,QoS profiles ,and advanced WLAN Settings

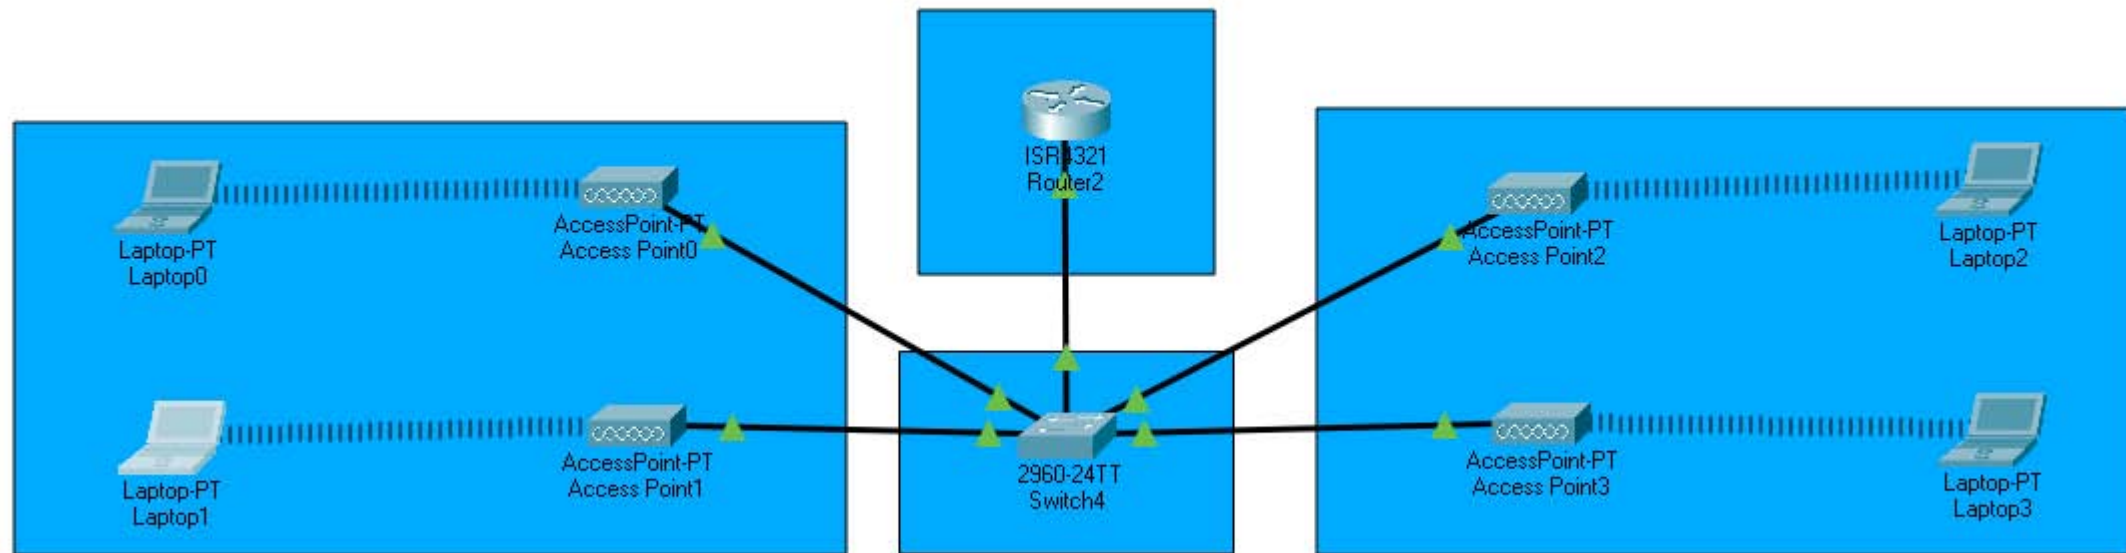

**GLOBAL**

Settings

**INTERFACE**

Port 0

Port 1

Port 1

Port Status

☒ On

SSID

VLAN10

2.4 GHz Channel

6

Coverage Range (meters)

140.00

Authentication

☐ Disabled☐ WEP

WEP Key

☐ WPA-PSK☒ WPA2-PSK

PSK Pass Phrase

Cisco.com

User ID

Password

Encryption Type

AES

Packet Tracer PC Command Line 1.0

C:\>

ipconfig

Bluetooth Connection: (default port)

Connection-specific DNS Suffix...:  
Link-local IPv6 Address.....: ::  
IPv6 Address.....: ::  
IPv4 Address.....: 0.0.0.0  
Subnet Mask.....: 0.0.0.0  
Default Gateway.....: ::  
0.0.0.0

Wireless0 Connection:

Connection-specific DNS Suffix...:  
Link-local IPv6 Address.....: FE80::290:CFF:FEC0:4533  
IPv6 Address.....: ::  
IPv4 Address.....: 10.1.1.2  
Subnet Mask.....: 255.255.255.0  
Default Gateway.....: ::  
0.0.0.0

C:\>

VLAN 10