
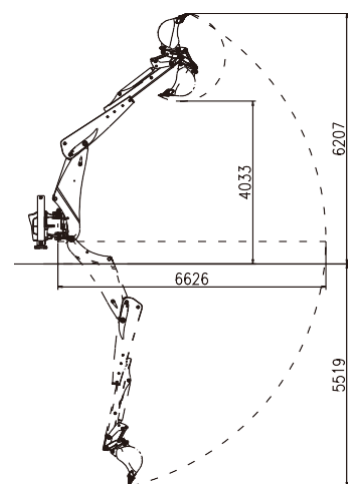
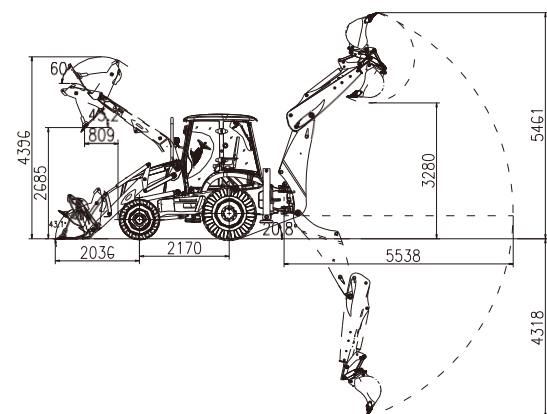
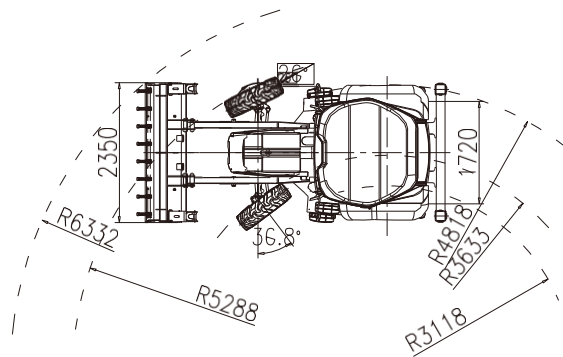


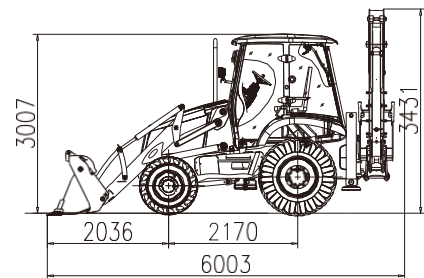

Basic	Specifications
Operating weight	8300 kg
Standard loading bucket capacity	1.0 m³
Standard excavating bucket capacity	0.2 m³
Max. tractive force	74 kN
Max. digging force-loader	61 kN
Max. breakout force-loader	61 kN
Max. arm digging force-excavator	38 kN
Max. bucket digging force-excavator	61 kN
Engine	
Brand	Perkins
Model	904J-E36TA
Type	Four cylinder,four stroke
Rated Power(SAE J1349)	74.4kw*2200rpm
Max. Torque	450Nm
Displacement	3.621L
Transmission	
Brand, model and type	Carraro
Gears forward	4
Gears reverse	4
Max. speed forward	39.0 km/h
Max. speed reverse	21.3 km/h
Service brake type	Wet brake
Parking brake type	Caliper disc brake
Front axle	
Brand and type	Carraro, Steering axle
Steering angle	38°
Rear axle	
Brand and type	Carraro · Wet axle
Tyres	
Front	14-17.5-14PR
Rear	19.5L-24-12PR
Front tyre pressure	0.55±0.03 Mpa
Rear tyre pressure	0.23±0.03 Mpa
Hydraulics	
Type	Load sensitive hydraulic steering
Max. flow	165 L/min
Max. pressure	25.1 Mpa
Service fill capacities	
Fuel	155 L
Hydraulic oil	117 L
Engine	10 L
Transmission	19.5 L
Anti freeze	18.5 L
Front axle	9.1 L
Rear axle	17.5 L

ONINMAQ 龙工

Efficiency Rules the Future

83D BACKHOE LOADER

Perkins electric injection engine.
Carraro transmission and axles.
The excavating side with side shift frame and swing boom.
Six sided panoramic cab, Rotating seat integrated pilot control.

