


DIMENSION

All Dimensions are Approximate. Dimensions May Vary with Bucket. Refer to Operating Specifications.

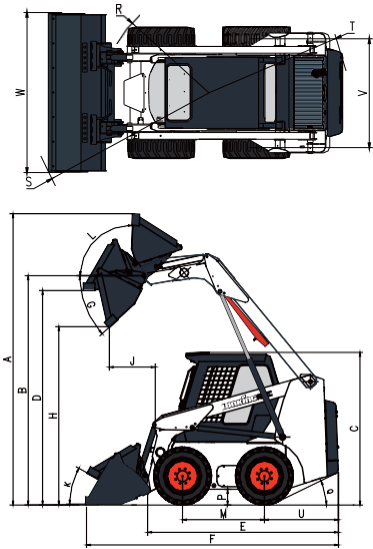

| NO. | DESCRIPTION                             | UNIT | DATA |
|-----|-----------------------------------------|------|------|
| A   | Max.Operation Height                    | mm   | 3880 |
| B   | Bucket Pin Height                       | mm   | 3023 |
| C   | Cab Roof Height                         | mm   | 2000 |
| D   | Max.Height At Bucket Leveled            | mm   | 2870 |
| E   | Length Without Attachment               | mm   | 2530 |
| F   | Length With Standard Bucket             | mm   | 3480 |
| H   | Dumping Height                          | mm   | 2550 |
| J   | Reach Rollback                          | mm   | 630  |
| M   | Wheelbase                               | mm   | 1080 |
| P   | Ground Clearance                        | mm   | 180  |
| R   | Front Turning Radius Without Attachment | mm   | 1180 |
| S   | Front Turning Radius                    | mm   | 2050 |
| T   | Rear Turning Radius                     | mm   | 1580 |
| U   | Tail Length                             | mm   | 980  |
| V   | Center Distance between Two Wheels      | mm   | 1275 |
| W   | Bucket Width                            | mm   | 1837 |
| G   | Dumping Angle At Max.Height             | °    | 35   |
| K   | Bucket Angle On Ground                  | °    | 29   |
| L   | Bucket Rollback Angle At Max.Height     | °    | 96   |
| Q   | Start Angle                             | °    | 28   |

TECHNICAL PARAMETERS

|                         |                              |                     |
|-------------------------|------------------------------|---------------------|
| BASIC                   | Operating Weight             | 3500kg              |
|                         | Rated Payload                | 1230kg              |
|                         | Bucket Capacity              | 0.54m³              |
|                         | Tipping Load                 | 2460kg              |
|                         | Breakout Force               | 28.06kN             |
|                         | Traction Force               | 25.9kN              |
|                         | L×W×H                        | 3460×1820×2000      |
| ENGINE                  | Engine Model                 | V3307-TE5AB-LKN2-1S |
|                         | Rated Power                  | 54.6kW/2600rpm      |
|                         | Displacement                 | 3.319L              |
|                         | Fuel consumption             | 8.8L                |
|                         | Stroke                       | 110mm               |
|                         | Bore                         | 98mm                |
|                         | Emission Standard            | EC stage            |
| HYDRAULIC SYSTEM        | Hydraulic Flow – Standard    | 91L/min-2600rpm     |
|                         | Type                         | Pilot Control       |
|                         | Hydraulic Pressure– Standard | 21MPa               |
|                         | Hydraulic Flow – High Flow   | 135L/min-2600rpm    |
| DRIVE TRAIN             | Loader Hydraulic Pressure    | 19 Mpa              |
|                         | Travel Speed -F&R            | 11.8km/h            |
| ELECTRIC                | Tyre                         | 12-16.5 NHS         |
|                         | Voltage(V)                   | 12 V                |
| SERVICE REFILL CAPACITY | Capacity(Ah)                 | 165Ah               |
|                         | Chain Box, Each Side         | 9L                  |
|                         | Cooling System               | 12L                 |
|                         | Engine Crankcase             | 9L                  |
|                         | Fuel Tank                    | 91L                 |
|                         | Hydraulic Tank               | 65L                 |

OPTIONAL

|                |                         |
|----------------|-------------------------|
| Cold Start     | Snow Blade              |
| Open Cab       | Snow Blower             |
| Solid Tyre     | Tree Planter            |
| Spiral Drill   | Four In One Bucket      |
| Excavator      | Detachable Bucket Tooth |
| Bevel Sweeper  | Detachable Bucket Blade |
| Closed Sweeper | Warm Air Blower         |
| Fork           | Mass Flow System        |

Function Description :

- 1.Integrated loader frame, higher intensity and better stability.
- 2.It adopts original and imported engine of strong power, energy saving, environmental, and reaches to emission standard of EPA Interim Tier IV & EU Stage V.
3. It adopts original and imported hydraulic system with stable reliability.
4. Cab adopts big angle and backward dump design, backward dump leaves bigger space for repair and convenient for maintenance.
5. It complies with international safety standard FOPS/ROPS of high intensity cab, which has bigger space and is more comfortable.
- 6.Hydraulic operation system adopts design of electric control self-lock and interlock to reduce misoperation to make the system safer.
- 7.It adopts quick changing device commonly used internationally, which can change all kinds of attachments quickly and conveniently. Hydraulic quick connector matches attachments from most manufacturers.
8. Compared with similar types, it has characteristics of narrow loader body, long wheelbase, high chassis, smaller steering radius, higher stability and stronger passing capacity.

Lonking 龙工

CDM312  
LONKING SKID STEER LOADER  
Efficiency Rules the Future



- ENGINE MODEL : V3307-TE5AB
- RATED POWER : 54.6KW
- OPERATING WEIGHT : 3500kg
- RATED PAYLOAD : 1230kg
- BUCKET CAPACITY : 0.54m³