


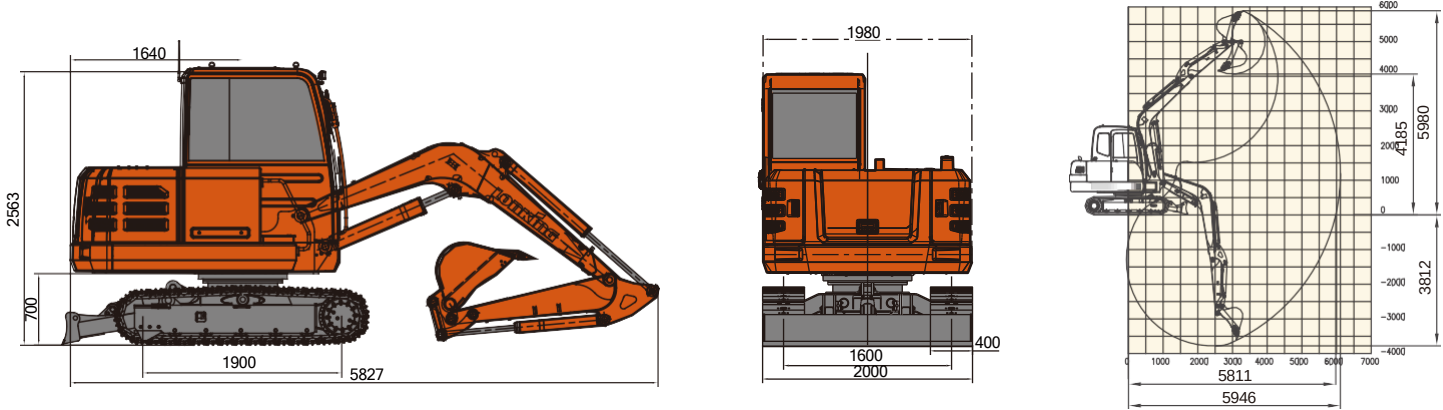

TECHNICAL PARAMETERS

| Name      |                          | Data             |
|-----------|--------------------------|------------------|
| Basic     | Operating weight         | 5850 kg          |
|           | Boom length              | 3000 mm          |
|           | Arm length               | 1550 mm          |
|           | Standard bucket          | 0.25 m³          |
|           | Max.Travel speed         | 2.5/4.2 km/h     |
|           | Max.Swing speed          | 10.5 rpm         |
|           | Grade ability            | 35°(70%)         |
|           | Ground pressure          | 34.5 kPa         |
|           | Max.Traction force       | 51.5 kN          |
| Engine    | Engine model             | WP3.2G50E311     |
|           | Rated power              | 36.8 kW/2200 rpm |
|           | Max.Torque               | 200 N.m/rpm      |
|           | Displacement             | 3.168 L          |
|           | Fuel tank                | 130 L            |
| Hydraulic | Max.Flow(total)          | 151 L/min        |
|           | Max.Working pressure     | 24.5 MPa         |
|           | Max.Pilot pressure       | 3.4 Mpa          |
|           | Max.Arm digging force    | 28 kN(ISO)       |
|           | Max.Bucket digging force | 40 kN(ISO)       |
|           | Hrdraulic oil tank       | 80 L             |
| Chassis   | Track width              | 400 mm           |
|           | Track shoes number       | 38( each side)   |
|           | Carrier rollers number   | 1( each side)    |
|           | Track rollers number     | 5( each side)    |
| Electric  | System vottage           | 12 V             |
|           | Battery capacity         | 12 V,100 Ah      |

PRODUCT FEATURES

|                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------|
| Weichai inline 4-cylinder, four-stroke engine with high-pressure common rail electronically controlled fuel injection system |
| High efficiency dual air and fuel filters                                                                                    |
| Parallel radiator cooling system                                                                                             |
| LUDV power balanced hydraulic system                                                                                         |
| Large LCD monitor and advanced electronic monitoring system                                                                  |
| Safe and comfortable cab, ergonomic design                                                                                   |
| Frameless cab windows for wider operational vision                                                                           |
| Working device adopts low alloy and high strength structural steel                                                           |

OPTIONAL

|                            |
|----------------------------|
| 0.1m³ narrow bucket        |
| 0.33m³ loading bucket      |
| Breaking hammer & pipeline |
| Quick coupler pipeline     |
| Work warning light         |
| Walking alarm              |
| Top protecting net         |
| Front protecting net       |
| 500mm triple grouser shoes |
| 600mm triple grouser shoes |
| Track rubber block         |

**LONKING 龙工**  
Efficiency Rules the Future

**CDM6060N**  
**HYDRAULIC EXCAVATOR**



# CDM6060N Hydraulic Excavator

## Efficiency Series 6T Small Hydraulic Excavator

New shape and orange red body, strong overall visual impact. **Streamline** design to make shape **more robust**. It's widely used in construction, earthwork, mining, irrigation and water conservancy, municipal works and other working conditions.



## High Stability—Engine, Fan, Main pump made by reliable suppliers and superior material

Weichai WP3.2 engine adopts small hub fan, large flow water pump and two-stage fuel filtration system. Low fuel consumption & noise, strong power, long life, low maintenance cost, good environmental adaptability.



Upgraded Cooling system. Fan with low speed ratio makes less noise. Large heat dissipation area, improve heat dissipation efficiency, prolong the service life of engine and hydraulic components.



Equipped with **LONKING large flow LP072 main pump** and **LV12S new main valve**, displacement increases, flow increases. Using "Arm Regeneration" technology adopted, improving the overall working efficiency.



## Upgraded cab. More space, Better vision



Equipped with **suspended leather seat** and **ergonomically optimized pilot control system** to alleviate operating fatigue effectively.



Equipped with **one-button start** and **5.7 inches LCD**, man-machine interaction is more convenient and intelligent.

Equipped with intelligent noise reduction, the **bluetooth radio** can be easily connected to your mobile phones, tablets and other electronic devices, presenting you with a better entertainment and calling experience.



## High Efficiency—Large load capacity, Easy to maintain

Working device adopts the design concept of 10 tons product, and **side boom** can reduce the moment of inertia effectively. The stability of the whole machine is great.

Equipped with standard **0.25m³ earthwork bucket** that is optimized according to mechanical analysis and made of **special wear-resistant steel material** cutting plate, CDM6060N is endowed with a longer service life of its digging bucket.

Rear cover adopts **three-door design**, which solves the problem of compact space and inconvenient daily maintenance of traditional small excavators. Daily maintenance can be easily completed by standing on the ground.

