


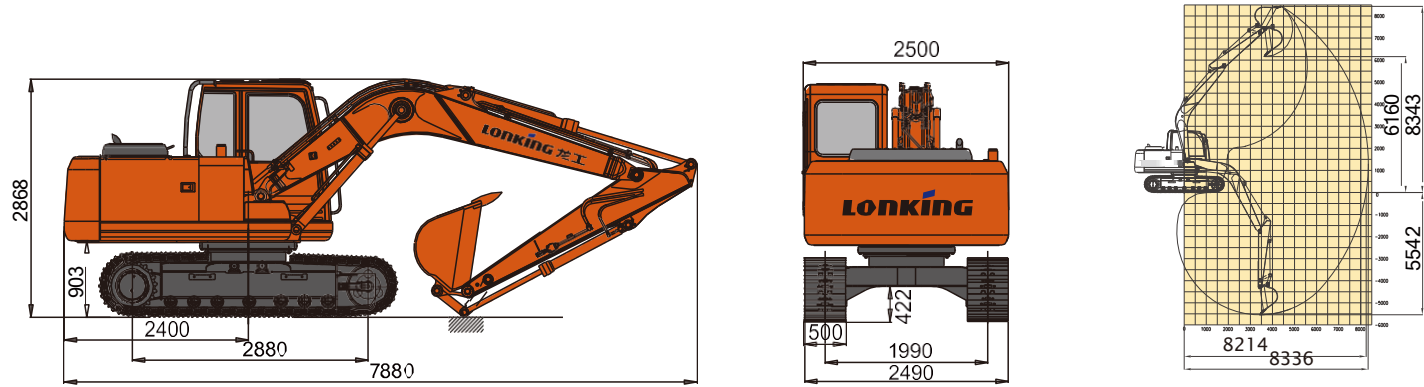

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	14000 kg
	Boom length	4600 mm
	Arm length	2500 mm
	Standard bucket	0.65 m³
	Max.Travel speed	3.7/5.7 km/h
	Max.Swing speed	11.7 rpm
	Grade ability	35°(70%)
	Ground pressure	43 kPa
	Max.Traction force	119 kN
Engine	Engine model	QSF3.8
	Rated power	90 kW/2200 rpm
	Max.Torque	500 N.m/rpm
	Displacement	3.8 L
	Fuel tank	290 L
Hydraulic	Max.Flow(total)	135×2 L/min
	Max.Working pressure	34.3 MPa
	Max.Pilot pressure	3.9 Mpa
	Max.Arm digging force	74 KN(ISO)
	Max.Bucket digging force	95 KN(ISO)
	Hydraulic oil tank	140/200 L
Chassis	Track width	500 mm
	Track shoes number	45(each side)
	Carrier rollers number	2(each side)
	Track rollers number	7(each side)
Electric	System vottage	12×2 V
	Battery capacity	100 Ah×2

PRODUCT FEATURES

Cummins HPCR turbo charged inter-cooled engine, meets EU stage V and EPA tier 4F emission standards.
Three-stage Air & Fuel Filtering System
Charge Air Cooling System with Parallel Radiator
Dual-pump Double-circuit Constant Power Control Hydraulic System
8 inch LCD Display with Multi Purpose
Comfortable ROPS Cabin with 2.7m³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

0.25m³ narrow bucket
0.67m³ loading bucket
0.75m³ loading bucket
Breaking hammer & pipeline
Work warning light
Walking alarm
Track rubber block
Top protecting net
Front protecting net
600mm triple grouser shoes
700mm triple grouser shoes
Quick coupler pipeline

Lonking 龙工
Efficiency Rules the Future

CDM6150
HYDRAULIC EXCAVATOR



ONINMAQ

Coninmaqsas.com

f i coninmaq

+57 304 5723295

Km 20 Autopista Norte.
Copacabana – Antioquia.

- OPERATING WEIGHT: 14000kg
- ENGINE POWER: 90kW
- BUCKET CAPACITY: 0.65m³
- TRAVEL SPEED: 3.7/5.7km/h