


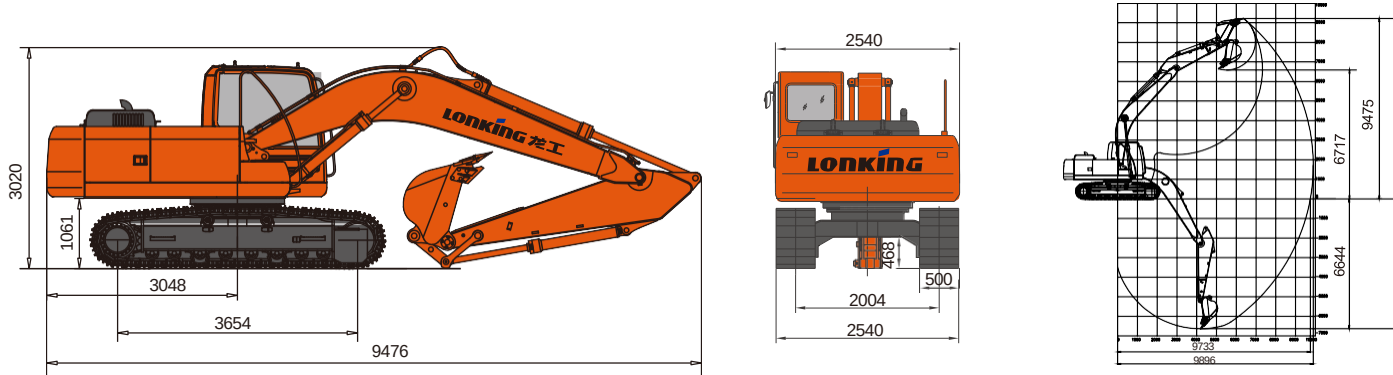

TECHNICAL PARAMETERS

	Name	Data
Basic	Operating weight	21800 kg
	Boom length	5675 mm
	Arm length	2920 mm
	Standard bucket	1.1 m³
	Max.Travel speed	3.1/5.3 km/h
	Max.Swing speed	13.5 rpm
	Grade ability	35°(70%)
	Ground pressure	54.4 kPa
	Max.Traction force	218 kN
Engine	Engine model	Cummins B6.7
	Rated power	129 kW/1950 rpm
	Max.Torque	1120/1400 N.m/rpm
	Displacement	8.9 L
	Fuel tank	600 L
Hydraulic	Max.Flow(total)	280×2 L/min
	Max.Working pressure	35 Mpa
	Max.Pilot pressure	4.0 Mpa
	Max.Arm digging force	101 kN(ISO)
	Max.Bucket digging force	139 kN(ISO)
	Hrdraulic oil tank	150/235 L
Chassis	Track width	500 mm
	Track shoes number	49(each side)
	Carrier rollers number	2(each side)
	Track rollers number	8(each side)
Electric	System vottage	24 V
	Battery capacity	24 V,120 Ah×2

PRODUCT FEATURES

Cummins B6.7 engine, meets the Euro V, Tier 4F emission standard.
Three-stage Air & Fuel Filtering System
Charge air Cooling System with Parallel Radiator
Advanced Control System with Function of Interflow & Re-activation, Swing Priority
8 inch LCD Display with Multi Purpose
Comfortable ROPS Cabin with 2.7m³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

Breaking hammer & pipeline
Work warning light
Walking alarm
MP3
Top protecting net
Front protecting net
Track rubber block

Lonking 龙工

Efficiency Rules the Future

CDM6225
HYDRAULIC EXCAVATOR



ONINMAQ

Coninmaqsas.com

- OPERATING WEIGHT: 21800kg
- ENGINE POWER: 129kW
- BUCKET CAPACITY: 1.1m³
- TRAVEL SPEED: 3.1/5.3km/h



+57 304 5723295



Km 20 Autopista Norte.
Copacabana – Antioquia.