


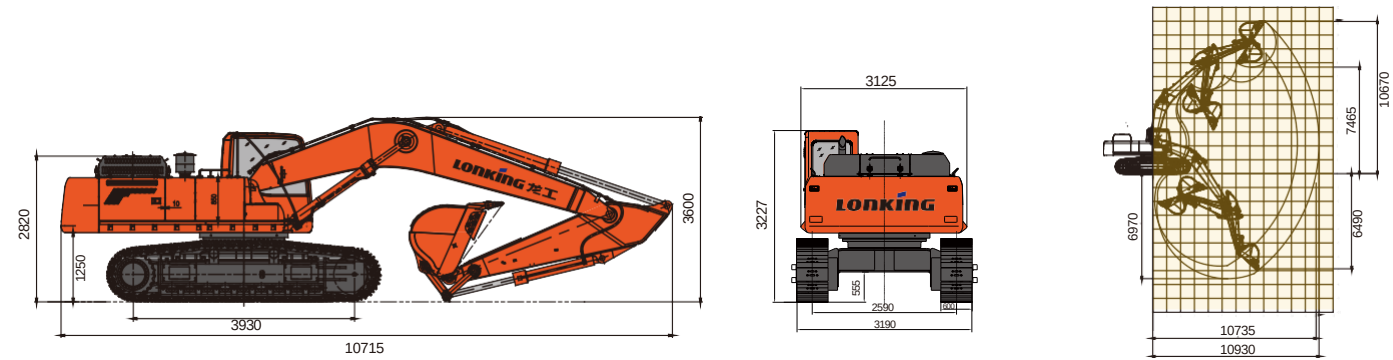

TECHNICAL PARAMETERS

ITEM		UNIT	CDM6306
Basic	Operating weight	kg	32800
	Boom length	mm	6150
	Arm length	mm	3200
	Standard bucket	m³	1.6 (Rock)
	Max.Travel speed	km/h	3.4-5.2
	Max.Swing speed	rpm	9.5
	Grade ability	°	35(70%)
	Ground pressure	kPa	62
	Max.Traction force	kN	283
Engine	Engine model	——	QSL9
	Rated power	kW/rpm	209/2100
	Max.Torque	Nm/rpm	1472/1400
	Displacement	L	8.9
	Fuel tank	L	600
Hydraulic	Max.Flow(total)	L/min	288×2
	Max.Working pressure	MPa	34.3
	Max.Pilot pressure	MPa	3.9
	Max.Arm digging force	kN	170
	Max.Bucket digging force	kN	220
Chassis	Hydraulic oil tank	L	300
	Track width	mm	600
	Track shoes number	——	47×2
	Carrier rollers number	——	2×2
	Track rollers number	——	8×2
Electric	System vottage	V	24
	Battery capacity	V/Ah	24/165×2

PRODUCT FEATURES

Cummins strong power engine. Emission standard meets EPA tier 4F and EU stage V.
Optimized Cooling System to Reduce Power Loss and Noise
Advanced Control System
Combined C type closed frame improves rigidity and strength of rotary platform.
Comfortable ROPS Cabin with 2.7m³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Rock Track Shoes, Chassis Reinforcement, More reliable and Wear-resistant
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

Breaking hammer & pipeline
Work warning light
Walking alarm
Top protecting net
Front protecting net
700mm triple grouser shoes
800mm triple grouser shoes

Lonking 龙工
Efficiency Rules the Future

CDM6306
HYDRAULIC EXCAVATOR



ONINMAQ
Coninmaqsas.com

coninmaq

+57 304 5723295

Km 20 Autopista Norte.
Copacabana – Antioquia.

- OPERATING WEIGHT:** 32800kg
- ENGINE POWER:** 209kW
- BUCKET CAPACITY:** 1.6m³
- TRAVEL SPEED:** 3.4/5.2km/h