


DIMENSIONS

All dimensions are approximate. Dimensions may vary with bucket and tire choice. Refer to operating specifications.

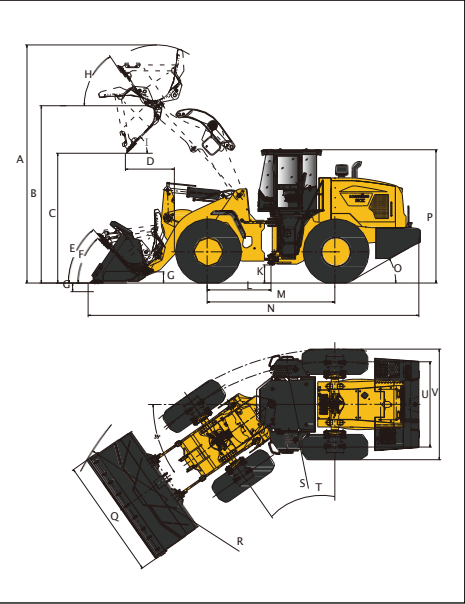

NO.	DESCRIPTION	UNIT	STD	High Dump
A	Overall Height – Bucket Raised	mm	4790	5090
B	Bucket Pin Height at Max. Lift	mm	3710	4020
C	Dump Clearance at Max. Lift (45°)	mm	2830	3140
D	Reach at Max. Lift and 45° Dump	mm	1140	1085
E	Rack Back Angle at Carry	°	46	50
F	Rack Back Angle at Ground	°	41	45
G	Digging Depth	mm	30-40	30-40
H	Rack Back Angle at Max. Lift	°	48	47
I	Dump Angle at Max. Lift	°	45	45
J	Carry Height	mm	400	400
K	Ground Clearance	mm	347	347
L	Center Line of Front Axle to Hitch	mm	1425	1425
M	Wheel Base	mm	2850	2850
N	Overall Length	mm	7480	7710
O	Departure Angle	°	27	27
P	Height to Top of Cab	mm	3180	3180
Q	Overall Width over Bucket	mm	2500	2500
R	Min. Turning Radius over Bucket	mm	6310	6410
S	Min. Turning Radius over Tires	mm	5695	5695
T	Steering Angle – Left/Right	°	35	35
U	Width at Tread Center	mm	1850	1850
V	Overall Width over Tires	mm	2320	2320

TECHNICAL PARAMETERS

Basic	Bucket Capacity	1.8m³
	Rated Payload	3500kg
	Operating Weight	11000±300kg
	Traction Force	97±3kN
	Breakout Force	95±3kN
	L×W×H	7480×2500×3180mm
Engine	Maker/Model	WEICHAI/WP4.6NG135E441
	Rated Power	99kW/2200rpm
	Maximum Torque	624N·m/1300-1500rpm
	Bore x Stroke (mm)	105×130mm
	No. of Cylinders /Displacement	4/4.580L
	Air Cleaner	Three Stage Air Cleaner
	Alternator	70Amp
	Battery	2-24V/105Ah
	Starting Motor	24V/6kW
	Transmission Type	Countershaft Powershift
DRIVE TRAIN	Shift Type	Mechanical Powershift Control
	Pressure of Transmission	1.1-1.5MPa
	Torque Converter Type	Single-stage&turbine,3-element
	Axles	Rigid (Front)&Oscillating (Rear)
	Rear Axle Oscillation (°)	±10°
	Differential	Conventional
	Main Reducer	Spiral Bevel,1-stage Reduction
	Final Reducer	Planetary Reduction
	Tire	17.5-25 L-3 12PR TT
	Travel Speed-Forward	7/12/24/39 km/h
BRAKE SYSTEM	Service Brake	Single Circuit Caliper,Dry Brake
	Setting Pressure	0.70-0.78MPa
	Parking Brake	Flexible Shaft Controlled
	Emergency Brake	Caliper Brake
	Type	Hydraulic Load Sensing System
STEERING SYSTEM	Pump	176L/min-2200rpm
	System Pressure	14MPa
	Cylinder Type	Double Acting
	Steering Angle	±35°
HYDRAULIC SYSTEM	Type	Joystick Control (Single-lever)
	Pump	176L/min-2200rpm
	Control Valve	2 Spool
	System Pressure	19MPa
	Cycle Time (Sec)	10.5
SERVICE REFILL CAPACITY	Fuel Tank (L)	200L
	Hydraulic Tank (L)	165L
	Crankshaft (L)	12L
	Transmission (L)	36L
	Front Axle/Rear Axle (L)	18L/18L

CONFIGURATION

WEICHAI Engine
LONKING Transmission
Mechanical Powershift Control
LONKING Axles (Dry type)
Joystick Working Control (Single-lever)
Flexible Shaft Controlled Caliper Brake
ROPS&FOPS Cabin
LCD Dashboard
Air Conditioner

OPTIONAL

Oil-bath Air Filter
17.5R25★★ L-3 TL
3rd Spool for Auxiliary Function
Sliding Cabin Window
Electric Heating Rear Window
Lockable Oil Tank Cap
Rear View Camera
Bucket(2.0m³)
Enlarged Bucket(2.3m³)
Coal Bucket(2.5m³)
Bucket(3 Piece Cutting Edges)
Log Grapple
Grass Grapple
Side Tip Bucket
Log Fork
Quick Hitch Coupler
Quick Hitch Bucket
4in1 Bucket(Quick Hitch Only)
Snow Blade(Quick Hitch Only)

LONKING 龙工

Efficiency Rules the Future

CDM835H

WHEEL LOADER



coninmaqsas.com

RATED POWER:	99kW/2200rpm
BUCKET CAPACITY:	1.8m³
RATED PAYLOAD:	3500kg
OPERATING WEIGHT:	11000±300kg