


DIMENSIONS

All dimensions are approximate. Dimensions may vary with bucket and tire choice. Refer to operating specifications.

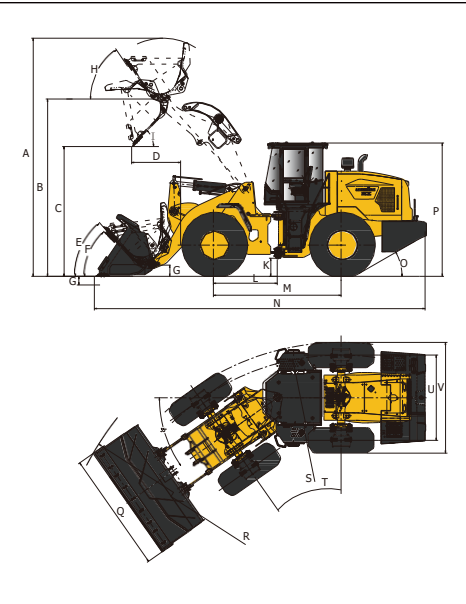

| NO. | DESCRIPTION                        | UNIT | DATA | High Dump |
|-----|------------------------------------|------|------|-----------|
| A   | Overall Height – Bucket Raised     | mm   | 5560 | 5890      |
| B   | Bucket Pin Height at Max. Lift     | mm   | 4164 | 4520      |
| C   | Dump Clearance at Max. Lift (45°)  | mm   | 3100 | 3360      |
| D   | Reach at Max. Lift and 45° Dump    | mm   | 1260 | 1370      |
| E   | Rack Back Angle at Carry           | °    | 46   | 46        |
| F   | Rack Back Angle at Ground          | °    | 43   | 44        |
| G   | Digging Depth                      | mm   | 42   | 125       |
| H   | Rack Back Angle at Max. Lift       | °    | 53   | 53        |
| I   | Dump Angle at Max. Lift            | °    | 45   | 45        |
| J   | Carry Height                       | mm   | 400  | 400       |
| K   | Ground Clearance                   | mm   | 398  | 398       |
| L   | Center Line of Front Axle to Hitch | mm   | 1650 | 1650      |
| M   | Wheel Base                         | mm   | 3350 | 3350      |
| N   | Overall Length                     | mm   | 8080 | 8810      |
| O   | Departure Angle                    | °    | 28   | 28        |
| P   | Height to Top of Cab               | mm   | 3400 | 3400      |
| Q   | Overall Width over Bucket          | mm   | 3000 | 3140      |
| R   | Min. Turning Radius over Bucket    | mm   | 7386 | 7530      |
| S   | Min. Turning Radius over Tires     | mm   | 6650 | 6650      |
| T   | Steering Angle – Left/Right        | °    | 35   | 35        |
| U   | Width at Tread Center              | mm   | 2240 | 2240      |
| V   | Overall Width over Tires           | mm   | 2835 | 2835      |

TECHNICAL PARAMETERS

|                         |                                |                                      |
|-------------------------|--------------------------------|--------------------------------------|
| Basic                   | Bucket Capacity                | 3.6m³                                |
|                         | Rated Payload                  | 5500kg                               |
|                         | Operating Weight               | 17200±300kg                          |
|                         | Traction Force                 | 185±3kN                              |
|                         | Breakout Force                 | 175±5kN                              |
|                         | L×W×H                          | 8320×3000×3400mm                     |
| Engine                  | Maker/Model                    | WEICHAI/WP10HG230E476B               |
|                         | Rated Power                    | 170kW/2200rpm                        |
|                         | Maximum Torque                 | 1200N·m/1400-1500rpm                 |
|                         | Bore x Stroke (mm)             | 126×130mm                            |
|                         | No. of Cylinders /Displacement | 6/9.5L                               |
|                         | Air Cleaner                    | Three Stage Air Cleaner              |
|                         | Alternator                     | 70Amp                                |
|                         | Battery                        | 2-24V/120Ah                          |
|                         | Starting Motor                 | 24V/7.5kW                            |
|                         | Transmission Type              | Planetary Powershift                 |
| DRIVE TRAIN             | Shift Type                     | Mechanical Powershift Control        |
|                         | Pressure of Transmission       | 1.1-1.5MPa                           |
|                         | Torque Converter Type          | Single-stage, Duo-turbine, 4-element |
|                         | Axles                          | Rigid (Front)&Oscillating (Rear)     |
|                         | Rear Axle Oscillation (°)      | ±10°                                 |
|                         | Differential                   | Conventional                         |
|                         | Main Reducer                   | Spiral Bevel, 1-stage Reduction      |
|                         | Final Reducer                  | Planetary Reduction                  |
|                         | Tire                           | 23.5-25 L-3 16PR TT                  |
|                         | Travel Speed-Forward           | 13.5/38 km/h                         |
| BRAKE SYSTEM            | Travel Speed-Reverse           | 16.5 km/h                            |
|                         | Service Brake                  | Single Circuit Caliper, Dry Brake    |
|                         | Setting Pressure               | 0.70-0.78MPa                         |
|                         | Parking Brake                  | Air Actuated Caliper Brake           |
|                         | Emergency Brake                | Air Actuated Caliper Brake           |
| STEERING SYSTEM         | Type                           | Hydraulic Load Sensing System        |
|                         | Pump                           | 162L/min-2200rpm                     |
|                         | System Pressure                | 15MPa                                |
|                         | Cylinder Type                  | Double Acting                        |
| HYDRAULIC SYSTEM        | Steering Angle                 | ±35°                                 |
|                         | Type                           | Double Pump Confluence               |
|                         | Pump                           | 202L/min-2200rpm                     |
|                         | Control Valve                  | 2 Spool                              |
|                         | System Pressure                | 19MPa                                |
| SERVICE REFILL CAPACITY | Cycle Time (Sec)               | 11                                   |
|                         | Fuel Tank (L)                  | 280L                                 |
|                         | Hydraulic Tank (L)             | 180L                                 |
|                         | Crankshaft (L)                 | 22L                                  |
|                         | Transmission (L)               | 48L                                  |
|                         | Front Axle/Rear Axle (L)       | 28L/28L                              |
|                         | Urea Addition (L)              | 30L                                  |

CONFIGURATION


|                                         |
|-----------------------------------------|
| WEICHAI Engine                          |
| LONKING Transmission                    |
| Mechanical Powershift Control           |
| LONKING Axles (Dry type)                |
| Joystick Working Control (Single-lever) |
| Air Actuated Caliper Brake              |
| ROPS&FOPS Cabin                         |
| LCD Dashboard                           |
| Air Conditioner                         |

OPTIONAL

|                                  |
|----------------------------------|
| High Dump                        |
| Oil-bath Air Filter              |
| Cold Starting(-35℃)              |
| Radial Tires                     |
| 24PR Tires                       |
| 3rd Spool for Auxiliary Function |
| Sliding Cabin Window             |
| Electric Heating Rear Window     |
| Lockable Oil Tank Cap            |
| Rear View Camera                 |
| Bucket(3 Piece Cutting Edges)    |
| Rock Bucket(3.0m³)               |
| Coal Bucket(4.2m³)               |
| Log Grapple                      |
| Grass Grapple                    |
| Marble Fork                      |
| Log Fork                         |
| Quick Hitch Coupler              |
| Quick Hitch Bucket(3.0m³)        |
| 4in1 Bucket(Quick Hitch Only)    |
| Snow Blade(Quick Hitch Only)     |

LONKING 龙工

CDM856H  
WHEEL LOADER  
Efficiency Rules the Future

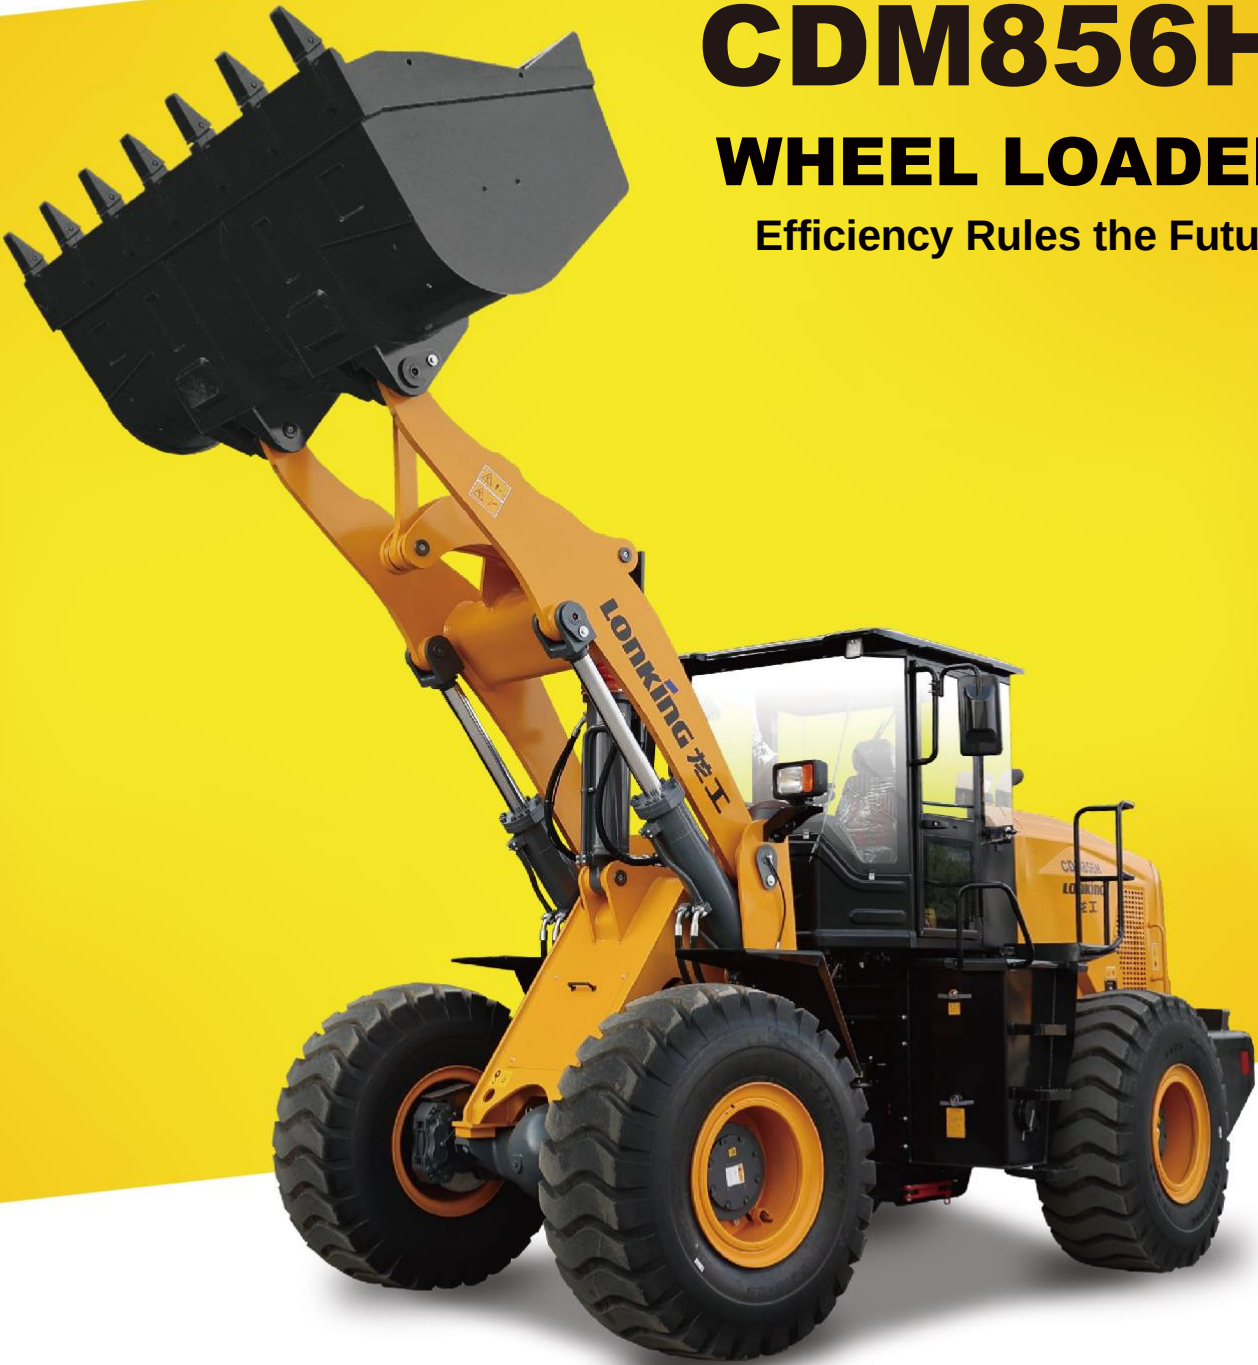

ONINMAQ

Coninmaqsas.com

- RATED POWER: 162kW/2200rpm rpm
- BUCKET CAPACITY: 3.6 m³
- RATED PAYLOAD: 5500 kg
- OPERATING WEIGHT: 17200±300 kg