
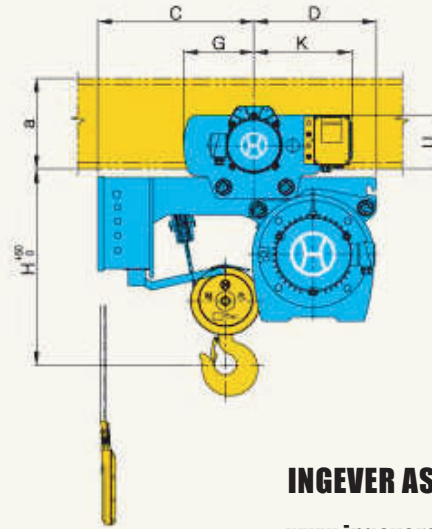


Low-Head Type

Hoist With Motor-Driven Trolley(HL)

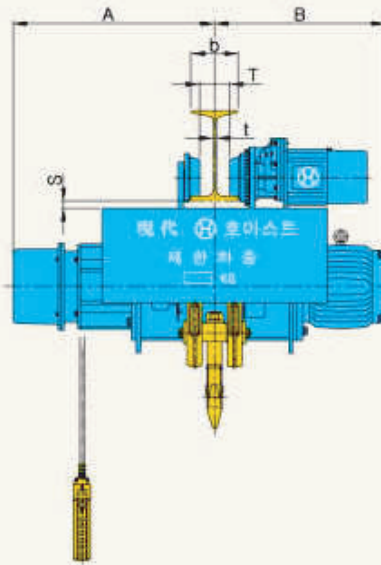

INGEVER ASOCIADOS

www.ingeverasociados.com
Barranquilla - Colombia

Capacity (ton)				1			2			2.8, 3			5		
Hoist	Lift Height(m)			6			6			6			6		
	Hoisting Speed (m/min)	High Speed	50Hz	10			8.3			7.5			4.7		
			60Hz	12			10			9			5.6		
		Low Speed	50Hz	6.7			5			3.8			3.5		
			60Hz	8			6			4.5			4.2		
	Hoisting Motor (kW×P)	High Speed		2.2×4			3.7×4			5.5×4			5.5×6		
		Low Speed		1.5×6			2.5×6			2.8×8			4.2×8		
	Wire Rope	Construction		6×19			6×24			6×37			6×37		
Dia.(mm)×no.of ropes		6×4			8×4			9×4			12.5×4				
Traversing	Brake			DC magnet disc											
	Traversing Speed (m/min)	High Speed	50Hz	20			20			20			20		
			60Hz	24			24			24			24		
		Low Speed	50Hz	13.3			13.3			13.3			13.3		
			60Hz	16			16			16			16		
	Traversing Motor (kW×P)	High Speed		0.75×4			0.75×4			0.75×4			0.75×4		
		Low Speed		0.5×6			0.5×6			0.5×6			0.5×6		
	Brake			DC magnet disc											
Dimension (approx.) (mm)	H		480			570			585			760			
	A		564			624			647			732			
	B		479			552.5			548			623			
	C		423			432			499			578			
	D		288			375			393			465			
	G		212			225			225			275			
	K		304			314			314			349			
I-beam and Spacing (mm)	a×b×t		S	T	U	S	T	U	S	T	U	S	T	U	
	200×100×7		35	48	144	35	46	170	35	46	170	—	—	—	
	250×125×7.5		33	73	146	33	71	172	33	71	172	40	60	216	
	300×150×10		27	98	152	27	95	178	27	96	178	34	85	222	
	450×175×13		—	—	—	—	—	—	—	—	—	26	110	230	
Min. radius of curvature(m)			1.5			1.8			1.8			2.3			
Weight (approx.)(kg)			210			338			424			662			

Note : 양정 6mts 이상의 모델 및 곡선부에 사용시는 당사로 문의 바랍니다. In Case of lift height over 6mts, please contact us.
And also, in case of using curvature, please contact us.