



|                                |                                      |
|--------------------------------|--------------------------------------|
| <b>Engine</b>                  | Cummins 6LTAA9.3                     |
| <b>Rated Power</b>             | 162 kW (217 hp / 220 ps) @ 2,200 rpm |
| <b>Net Power</b>               | 152 kW (204 hp / 207 ps) @ 2,200 rpm |
| <b>Operating Weight</b>        | 17,900 kg                            |
| <b>Standard Bucket Size</b>    | 3.5 m <sup>3</sup>                   |
| <b>Standard Breakout Force</b> | 180.7 kN                             |
| <b>Standard Dump Clearance</b> | 2,978 mm                             |

# 856H MAX WHEEL LOADER

TOUGH WORLD. TOUGH EQUIPMENT.



# 856H MAX SPECIFICATIONS >>>

## ENGINE

|                     |                                       |
|---------------------|---------------------------------------|
| Emission Regulation | Tier 2 / Stage II                     |
| Make                | Cummins                               |
| Model               | 6LTA A9.3                             |
| Rated Power         | 162 kW (217 hp / 220 ps) @ 2,200 rpm  |
| Net Power           | 152 kW (204 hp / 207 ps) @ 2,200 rpm  |
| Peak Torque         | 940 N·m @ 1,400 - 1,600 rpm           |
| Displacement        | 9.3 L                                 |
| Number of Cylinder  | 6                                     |
| Aspiration          | Turbocharged & Air-to-air intercooled |

## TRANSMISSION

|                           |                                    |
|---------------------------|------------------------------------|
| Transmission Type         | Electric proportional, power shift |
| Torque Converter          | Single stage, three elements       |
| Maximum Travel Speed, fwd | 37 km/h                            |
| Maximum Travel Speed, rev | 24 km/h                            |
| Number of Speed, fwd      | 4                                  |
| Number of Speed, Rev      | 3                                  |

## AXLES

|                         |              |
|-------------------------|--------------|
| Differential Front Type | Limited slip |
| Differential Rear Type  | Limited slip |
| Axle Oscillation        | ± 10°        |

## STEERING


|                          |             |
|--------------------------|-------------|
| Steering Configuration   | Articulated |
| Steering Relief Pressure | 20.7 MPa    |

## BRAKES

|                         |                           |
|-------------------------|---------------------------|
| Service Brake Type      | Wet discs brake           |
| Service Brake Actuation | Hydraulic                 |
| Parking Brake Type      | Drum                      |
| Parking Brake Actuation | Electro-hydraulic release |

## HYDRAULIC SYSTEM

|                          |        |
|--------------------------|--------|
| Main Pump Type           | Gear   |
| Main Relief Pressure     | 25 MPa |
| Raise                    | 5.3 s  |
| Dump Time                | 1.5 s  |
| Float Down Time          | 3.0 s  |
| Fastest Total Cycle Time | 9.8 s  |

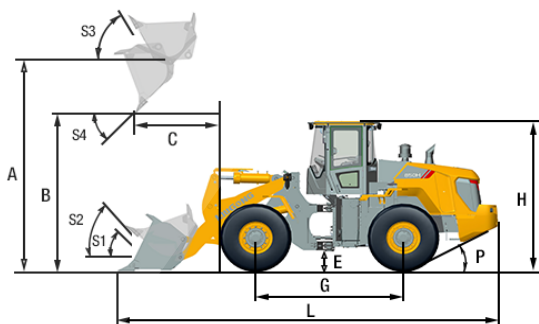

## LOADER ARM PERFORMANCE with Standard Bucket 3.5 m³

|                                                  |           |
|--------------------------------------------------|-----------|
| Tipping Load - Straight (ISO 14397-1:2007)       | 13,860 kg |
| Tipping Load - Full Turn (ISO 14397-1:2007)      | 12,140 kg |
| Bucket Breakout Force                            | 180.7 kN  |
| A Maximum Hinge Pin Height                       | 4,156 mm  |
| B Dump Clearance at Full Height Discharge        | 2,978 mm  |
| C Dump Reach at Full Height Discharge            | 1,231 mm  |
| D Maximum Digging Depth, Bucket Level            | 50 mm     |
| S <sub>1</sub> Bucket Rollback at Ground Level   | 44°       |
| S <sub>2</sub> Bucket Rollback at Carry          | 49°       |
| S <sub>3</sub> Bucket Rollback at Maximum Height | 62°       |
| S <sub>4</sub> Maximum Dump Angle at Full Height | 45°       |

## BUCKET PERFORMANCE

|                  |              |
|------------------|--------------|
| Reference Bucket | 2.7 - 5.6 m³ |
|------------------|--------------|

## DIMENSIONS

|                                                |          |
|------------------------------------------------|----------|
| E Ground Clearance                             | 431 mm   |
| G Wheelbase                                    | 3,370 mm |
| H Cab Height                                   | 3,500 mm |
| J Wheel Tread                                  | 2,150 mm |
| K Width Over Tires                             | 2,750 mm |
| L Length with Bucket Down                      | 8,390 mm |
| M Turn Angle, Either Side                      | 38°      |
| P Rear Angle of Departure                      | 28°      |
| R <sub>1</sub> Turning Radius, Bucket Carry    | 6,986 mm |
| R <sub>2</sub> Turning Radius, Outside of Tire | 6,308 mm |
| W Width Over Bucket                            | 2,970 mm |

## TIRES


|           |                     |
|-----------|---------------------|
| Tire Size | 23.5-25 PR20 L-3 TT |
|-----------|---------------------|

## OPERATING WEIGHTS

|                  |           |
|------------------|-----------|
| Operating Weight | 17,900 kg |
|------------------|-----------|

## SERVICE CAPACITY

|                                   |             |
|-----------------------------------|-------------|
| Fuel Tank                         | 300 L       |
| Engine Oil                        | 26 L        |
| Cooling System                    | 42 L        |
| Hydraulic System                  | 240 L       |
| Transmission and Torque Converter | 35 L        |
| Axles, Front/Rear                 | 40 L / 42 L |

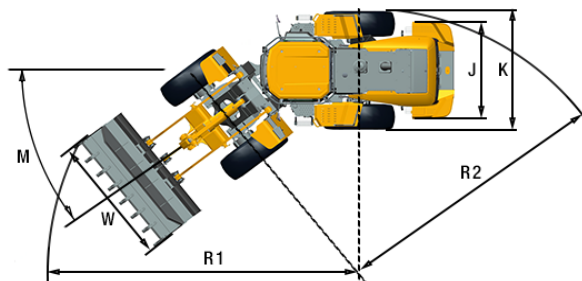

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 3886124 E: overseas@liugong.com  
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

03/2023 Designed by LiuGong  
Replace the previous versions of 02/2022