



Pulcra Industrial Sweeper

Ref. 02.EL.1200/1500/2000/2500




























- Ideal for jobs indoors or outdoors
- Extraordinary sweeping efficiency
- Productivity of over 35,000 yd2/Hr.
- · Simple operation from the seat of the carrier
- Floating mount for each type of carrier to compensate for uneven surfaces
- Fully hydraulic, using the carrier's hydraulic system (Auxiliary hydraulics used where available, hydraulic forklifts may require minor modification, dependent on valves available)
- Self-loading, with hydraulic opening and closing of hopper (Patented system)
- Long lasting ductile brushes self-adjusment to surface conditions
- Special long lasting polypropylene support wheels for jobs in rough or abrasive areas
- High quality paint and finishes to withstand the worst job conditions
- Not for use on electric forklifts.
- Optional water spray dust control system
- Optional hydraulic side brush/brushes

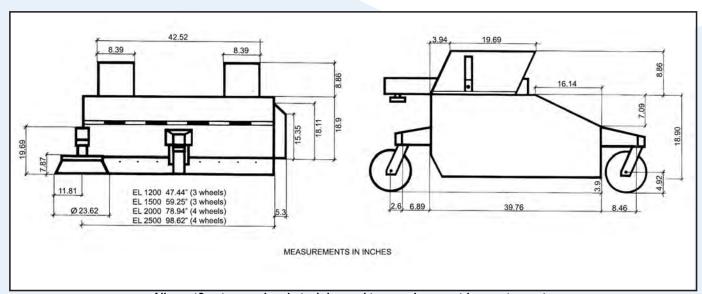

All specifications and technical data subject to change without prior notice.



Office 6535 NW 84th Ave Miami, Florida, 33167 Tel +1-786-542-6122 info@coneac.com

www.coneac.com



Pol. Ind. La Pobla, nave 19-21 08260 Súria (BCN) SPAIN Tel. +34 93 869 40 50 - Fax +34 93 868 25 77 euroimplementos@euroimplementos.com www.euroimplementos.com











Technical Specifications

| Model | 02.EL.1200 | 02.EL.1500 | 02.EL.2000 | 02.EL.2500 |
|-------------------------------|------------------------------------|------------|------------|------------|
| Working Pressure (psi) | 1800 | 1800 | 1800 | 2900 |
| Flow Rate (gpm) | 3.5/20 | 4.5/20 | 5.25/20 | 5.25/20 |
| Hopper Opening/closing | Hydraulic | Hydraulic | Hydraulic | Hydraulic |
| Sweeping Width (inches) * | 47.44 | 59.25 | 78.94 | 98.62 |
| Total Width (inches) ** | 52.76 | 64.57 | 84.25 | 103.94 |
| Weight with Side Brush (lbs.) | 838 | 926 | 1168 | 1367 |
| Brush Material | 65% steel / 35% Wavy Polypropylene | | | |

^{*} Other Widths Available ** Without Side Brush(es)

Additional Applications



Optional dual brushes for sweeping on both sides at the same time.



Optional galvanized construction for use in extremely corrosive conditions.



Office 6535 NW 84th Ave. Miami, Florida, 33167 Tel. +1-786-542-6122 info@coneac.com www.coneac.com



Factory
Pol. Ind. La Pobla, nave 19-21
08260 Súria (BCN) SPAIN
Tel. +34 93 869 40 50 - Fax +34 93 868 25 77
euroimplementos@euroimplementos.com
www.euroimplementos.com











