


03 - HCNR201 SELECTABLE OUTPUT ANALOG SCHEMATIC - REV B2

OPA317 implementation, user-selectable 0-2.4 V / 0-3.0 V / 0-4.5 V output

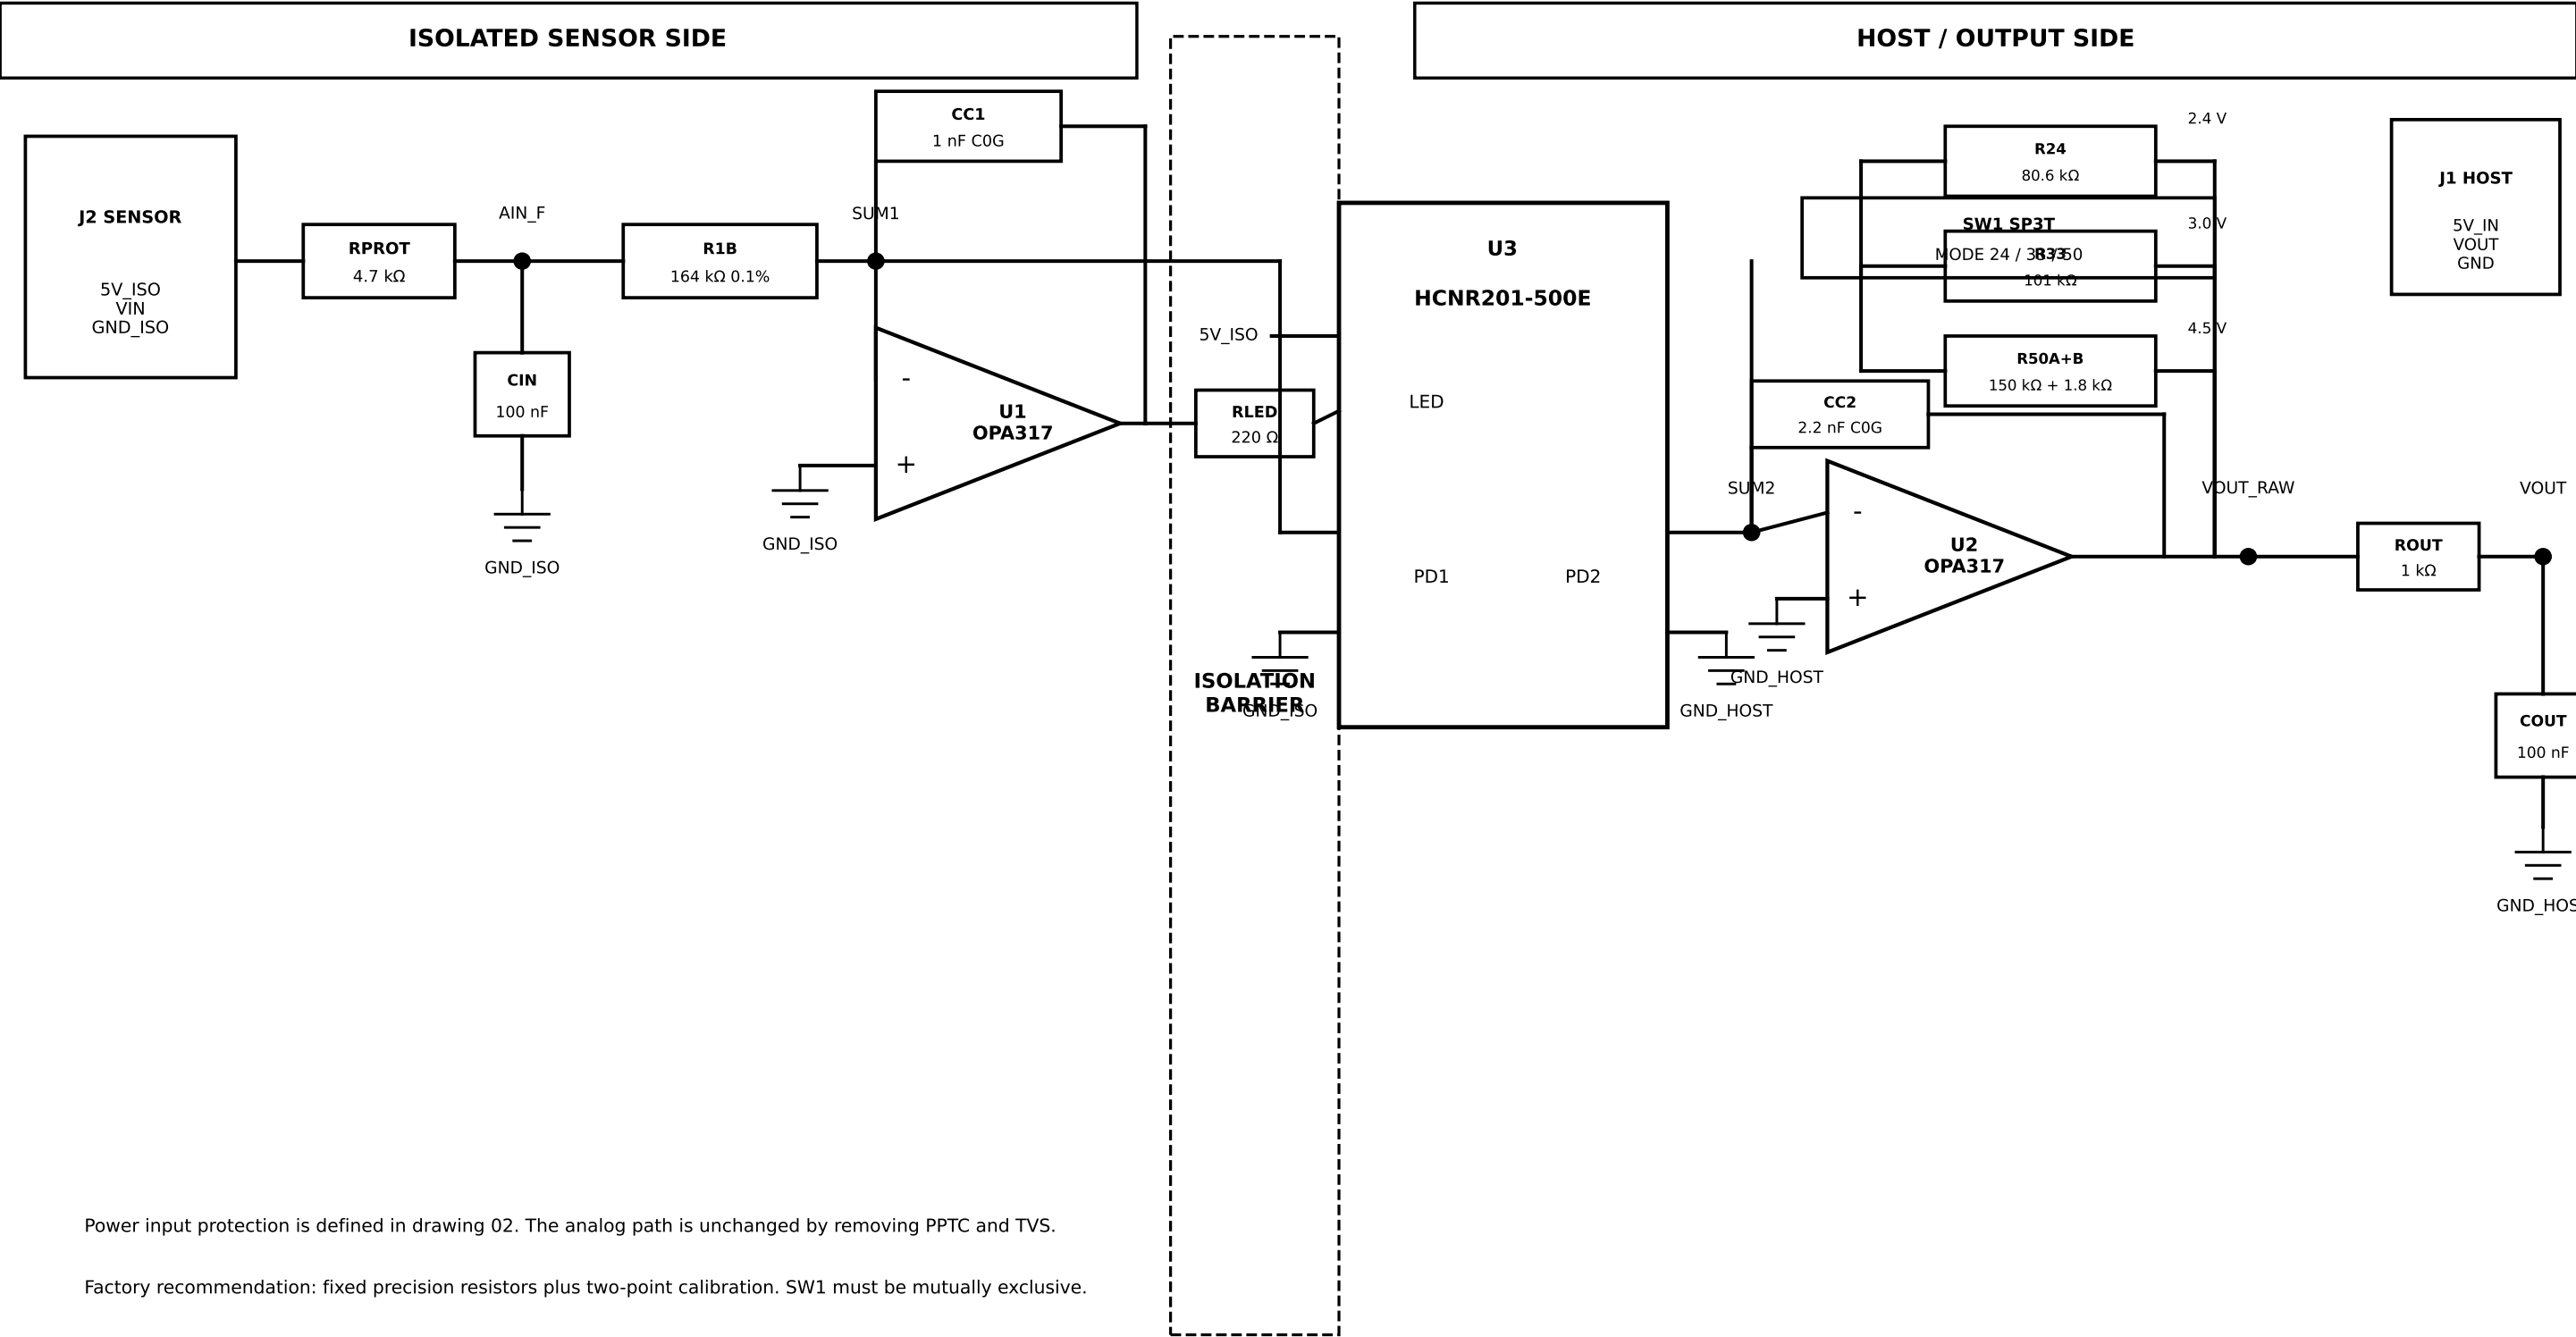

Power input protection is defined in drawing 02. The analog path is unchanged by removing PPTC and TVS.

Factory recommendation: fixed precision resistors plus two-point calibration. SW1 must be mutually exclusive.