JMS AG

Jet Maintenance & Service Rainer-Haungs-Strasse 42 77933 Lahr/Germany Phone +49 (7821) 9 94 69 – 0 Fax +49 (7821) 9 94 69 – 100




Internet: http://www.jms.aero/
eMail: mailto:sales@jms.aero


HRB 705130 Amtsgericht Freiburg i.Br. VAT Reg No/USt.-IdNr.: DE270217003

Doc. No. TDS_J-TOW350_R01.docx

Datasheet:

p/n: J-TOW350

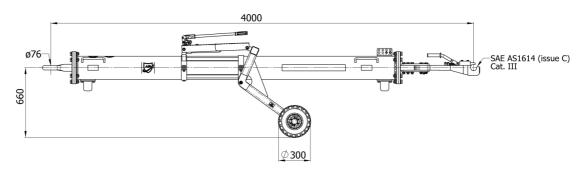

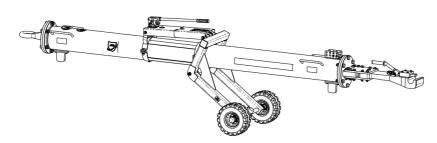

Standard features:

- 2xShearpins for Push/Pull / torque mounted, replaceable without using tools (add. as spare parts incl.: 4xShearpins)
- 1xRetaining pin
- FOD-Protection device:
 No shear pin debris will be lost in case of shear pin fracture!
- Automatic locking mechanism
- Air-inflated tires
- Hydraulically height adjustable undercarriage
- Steel tube
- Skydrol resistant paint
- Standard colors: yellow RAL 1007 (tube), black RAL 9004 (undercarriage)

Aircraft application:

A350 – 900/-1000

Shipping information incl. packing:

Approx. Weight	Approx. shipping Dims I x w x h	Approx. Volume
[kg]	[mm]	[m³]
406	4500 x 1050 x 965	4,6
[lbs]	[inch]	[ft ³]
895	177 x 41 x 38	162

Options (at extra charges):

- Puncture-proof (full rubber) tires
 - → Option R3
- Floating axle
 - → Option AV
- Revolving tow head ± 10°
 - → Option AD
- Revolving tow eye
 - → Option AP
- · Revolving tow eye with shock absorber
 - → Option AA
- Customized color for towbar tube i.a.w. RAL coding scheme
 - → Option A-RAL

Documentation:

- Technical manual incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity (if applicable)

Net weight:

• 290 kg / 639 lbs

Shear pins:

- 20-00230-0020-322 "L1" Push/Pull and Torque
- 00.40060.0008 "L-FB" Retaining pin

We reserve the right to update this datasheet at any time w/o prior notice!