




LSC 300/700 - LSC 400/800 & WSC 1000/1200

CHASSIS	The chassis is produced by steel profiles and steel plates.
STEERING & BRAKING SYS.	The tow-bar is provided by a fifth wheel system mounted to the chassis for easy steering. Front wheel maneuvering is provided by a slewing ring that works vertically on the axis. The steering system equipped with a brake system that is applied when tow-bar is at upright and released position.
TANK	The tanks are made of stainless steel and provided by manholes, filler caps and discharge valves. The top of the tanks are covered with anti slip material or steel grid for safe walking.
CLEAN WATER PUMP	The clean water pump is driven by hydro-motor, which is powered by the diesel engine or electric motor, to be used to pump the clean water to aircraft's tank.
WASTE WATER COUPLING	The waste water coupling is made of stainless steel and is of quick coupling type. It is equipped with 4" flexible hose.
CLEAN WATER COUPLING	The waste water coupling is made of stainless steel and is of quick coupling type. It is equipped with 1" flexible hose.
ELECTRICAL SYSTEM	The electrical system is powered by a standard battery pack. The electrical system is provided by work lamp and the all accessories are controlled from a control panel.
ELEVATING LADDER	A foldable ladder is provided to be used for operator to reach desired elevating height to serve aircraft.
SURFACES	The all parts are custom painted.
OPTIONS	heating, insulation, vacuum pump, logo application.



Eyüpsultan Mahallesi Kartopu Sk. No: 7 34885 Sancaktepe / İstanbul / TURKEY
 TEL : +90 216 527 42 70 (5 Lines) FAX : +90 216 364 33 63
 e-mail: timsan@timsantr.com http://www.timsan-gse.com

TIMSAN

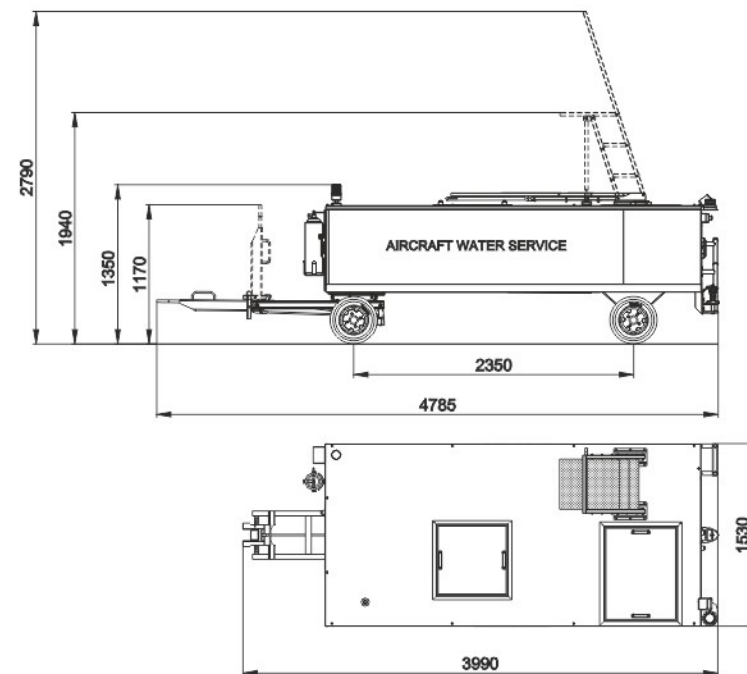

WSC 1200

All specifications are subject to change without notice

Technical Data	LSC 300/700	LSC 400/800	WSC 1000	WSC 1200
Overall Length (mm)	3740	4440	4250	3990
Overall Width (mm)	1580	1555	1580	1530
Overall Height (mm)	1350	1350	1350	1350
Water Capacity (lt)	300	400	1000	1200
Lavatory Capacity (lt)	720	800	—	—
Working Height (mm)	1940	1940	1940	1940
Water Pump Capacity (bar, lt/min)	2,5 bar - 70/90	2,5 bar - 70/90	2,5 bar - 70/90	2,5 bar - 70/90
Dead Weight (approx.) (kg)	700	1375	700	1125
Shipping Dimensions (mm)	3000 x 1525 x 1120			
Shipping Conditions	2 ea x 20' or 4 ea x 40' box			

TIMSAN

Eyüpsultan Mahallesi Kartopu Sk. No: 7 34885 Sancaktepe / İstanbul / TURKEY
 TEL : +90 216 527 42 70 (5 Lines) FAX : +90 216 364 33 63
 e-mail: timsan@timsantr.com http://www.timsan-gse.com