



3x N-Channel MOSFET Switches max. 5A / 20Vds

Gates unconnected by default, with ability to re-route them as required
short solder jumpers JP6-JP8 as required to use default GPIOs.
ATTN: always use GND wire on J9 when switching high loads!

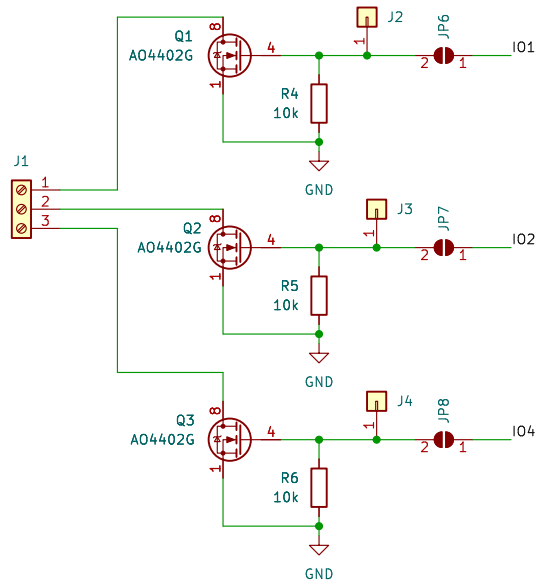


MCU Socket
Compatible with
WEMOS S2 Mini
WEMOS D1 Mini

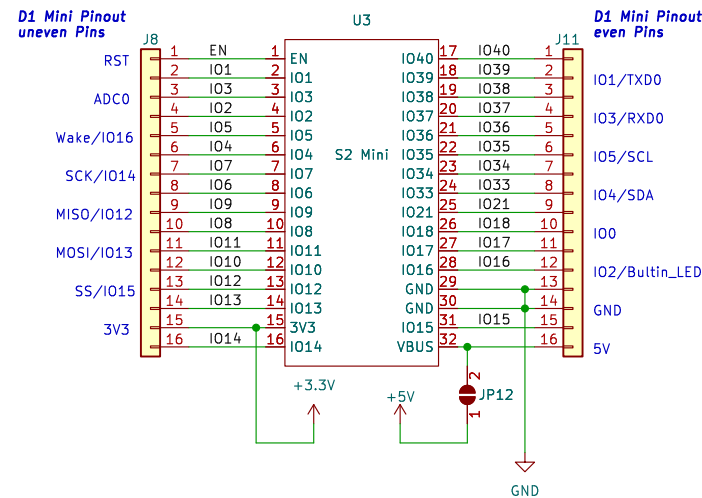


Level Shifting 3V3 -> 5V

Disabled by default
short JP14+JP16 / JP15+JP17 to enable

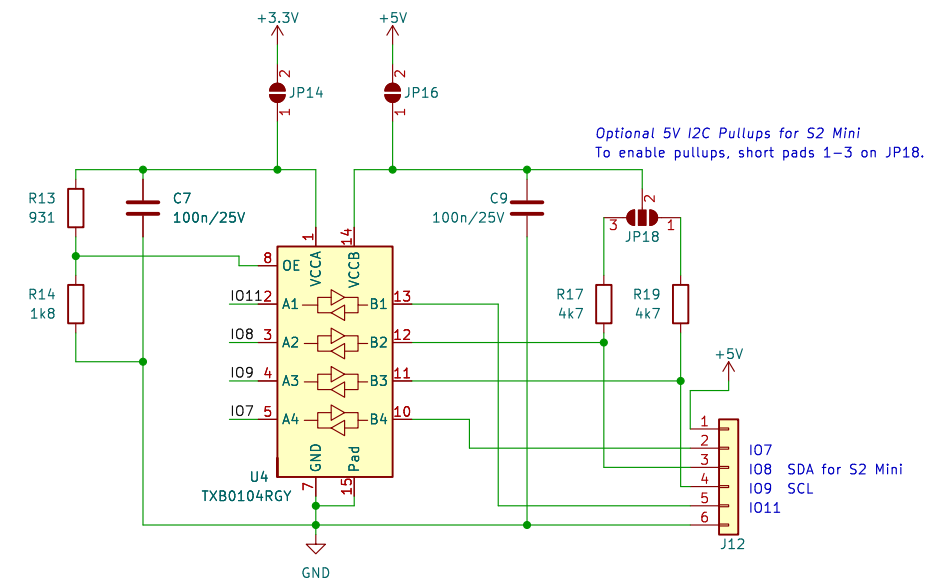

Pushbutton

Short JP3 to enable button on IO16

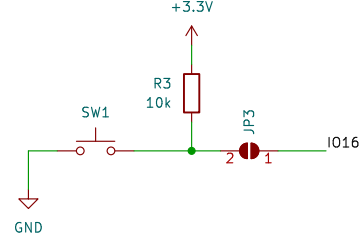

Optional I2C Pullups 3V3

To enable pullups, short pads 1-3 on the corresponding jumper pads.

