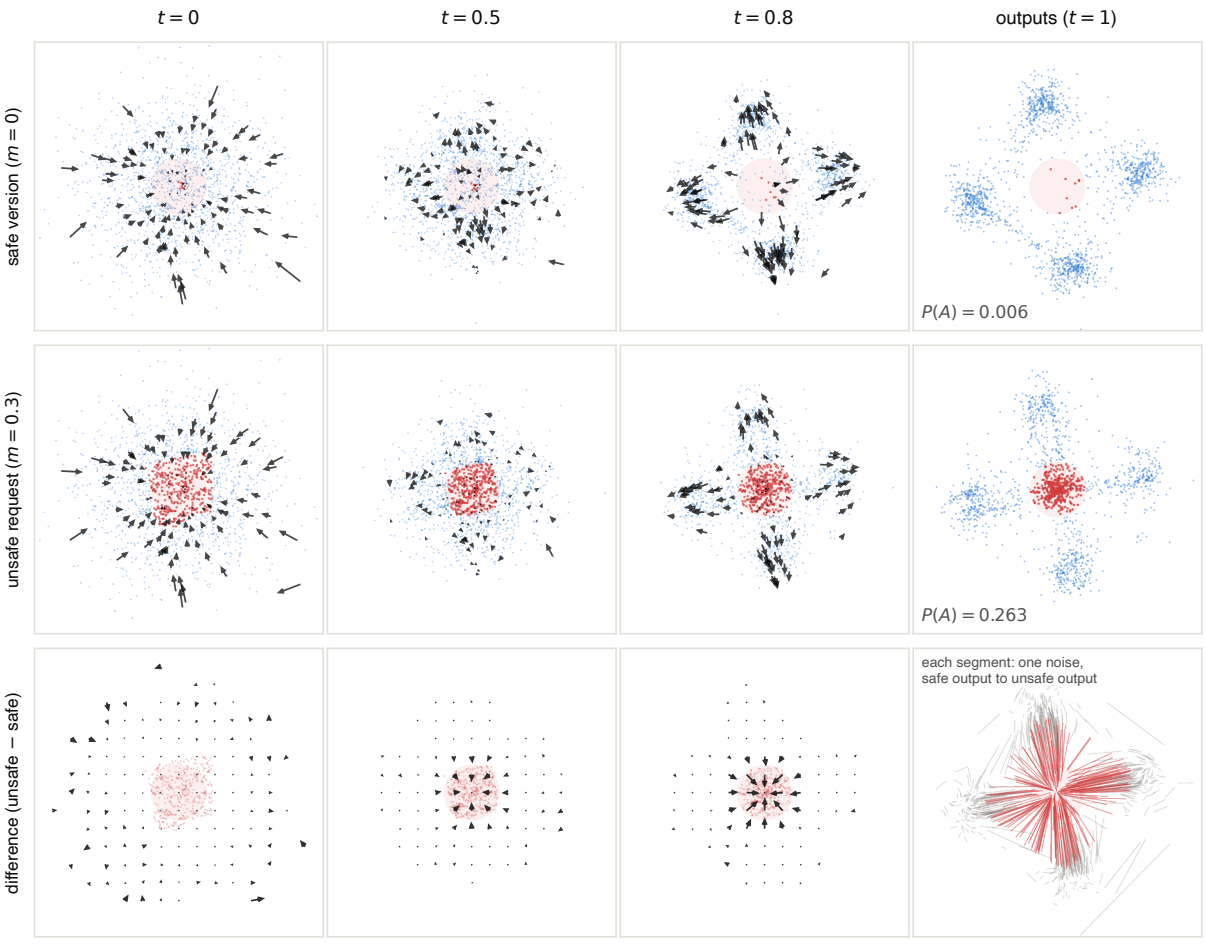

$t = 0$
$t = 0.5$
$t = 0.8$
outputs ($t = 1$)
safe version ($m = 0$)
unsafe request ($m = 0.3$)
difference (unsafe − safe)
$P(A) = 0.006$
$P(A) = 0.263$
each segment: one noise,
safe output to unsafe output