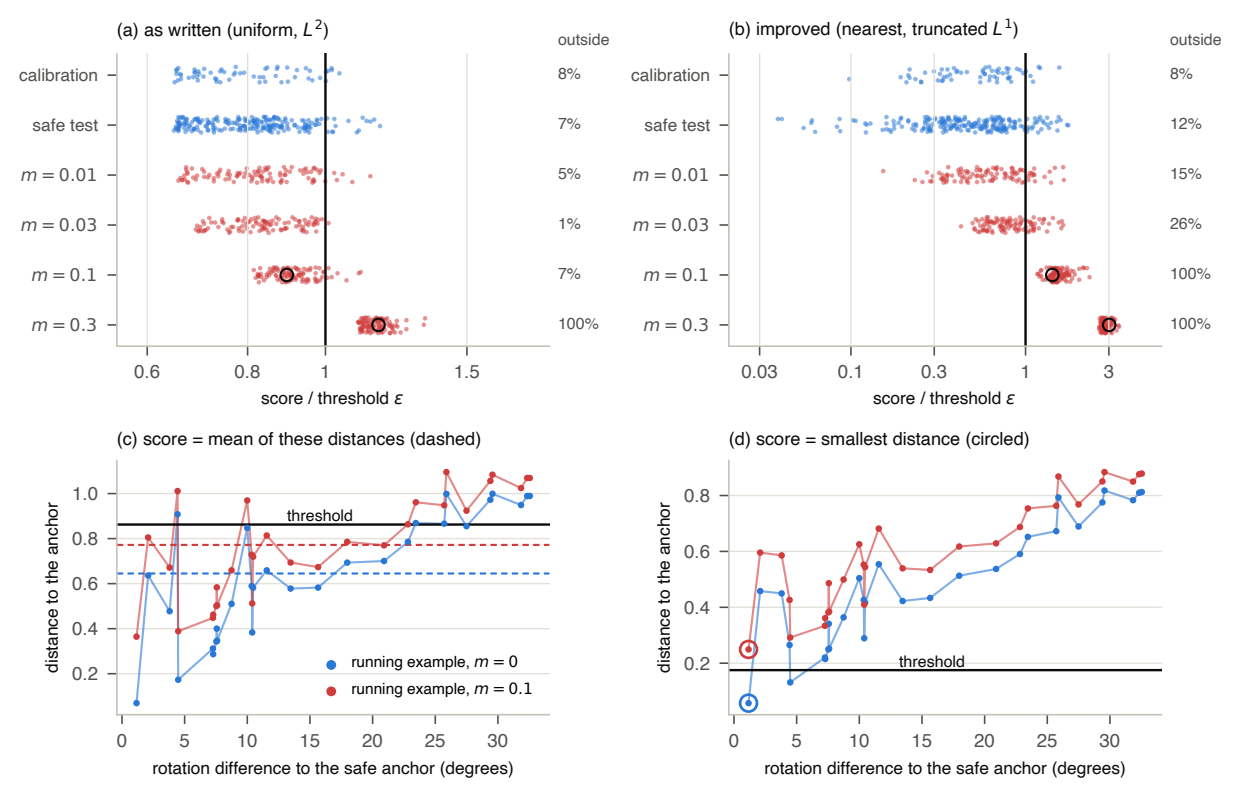

(a) as written (uniform, L^2)
outside
calibration
safe test
$m = 0.01$
$m = 0.03$
$m = 0.1$
$m = 0.3$
8%
7%
5%
1%
7%
100%
0.6
0.8
1
1.5
score / threshold ε
(b) improved (nearest, truncated L^1)
outside
calibration
safe test
$m = 0.01$
$m = 0.03$
$m = 0.1$
$m = 0.3$
8%
12%
15%
26%
100%
100%
0.03
0.1
0.3
1
3
score / threshold ε
(c) score = mean of these distances (dashed)
distance to the anchor
threshold
running example, $m = 0$
running example, $m = 0.1$
rotation difference to the safe anchor (degrees)
(d) score = smallest distance (circled)
distance to the anchor
threshold
rotation difference to the safe anchor (degrees)