How R1-R5 define steering strength and application windows
Schematic schedules: method definitions, not measured results

R1 | Constant steering

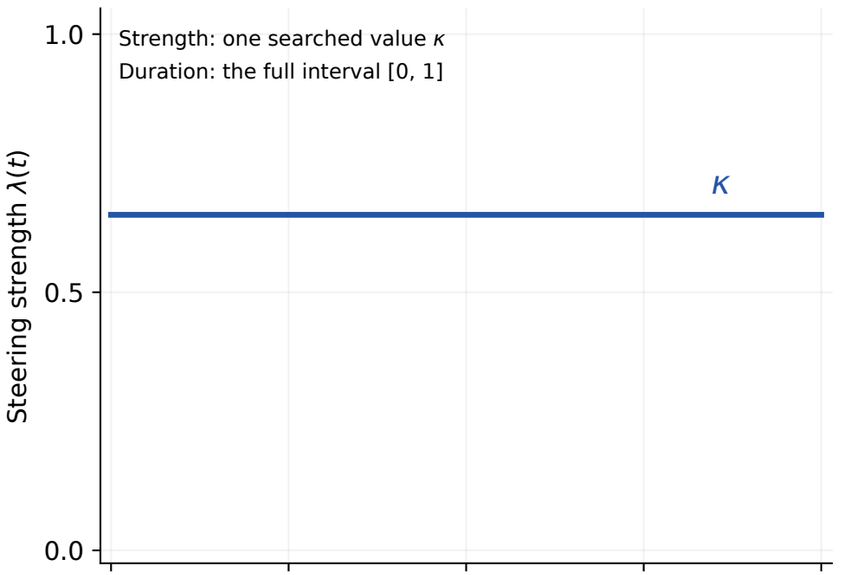

R2 | Fixed temporal window

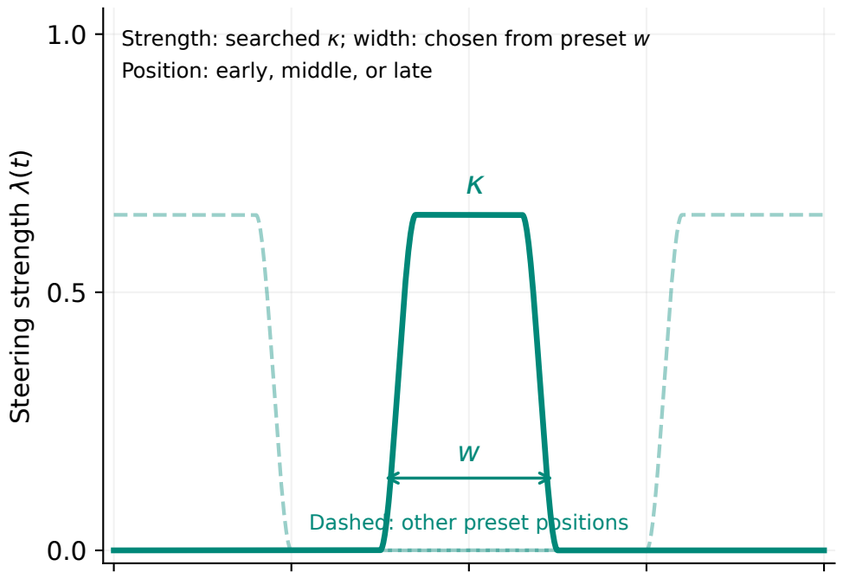

R3 | Peak-deviation window

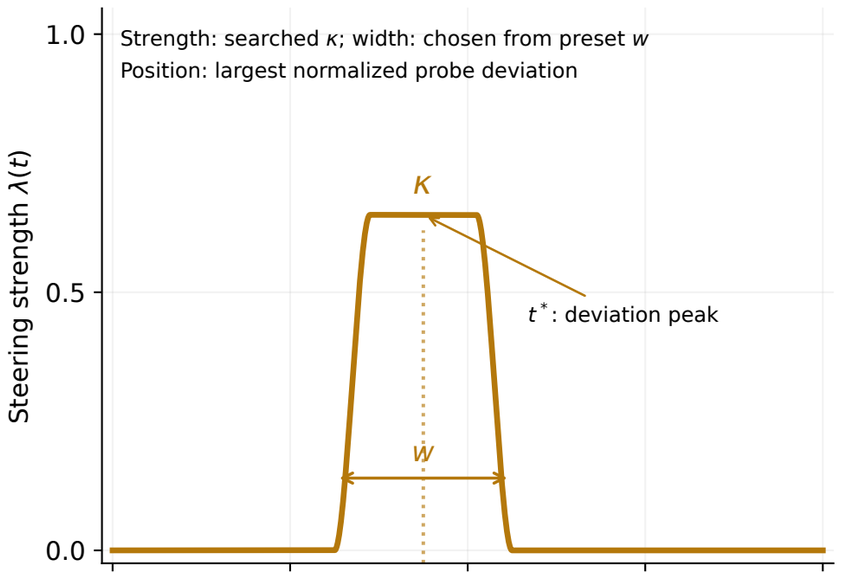

R4 | Contiguous-deviation windows

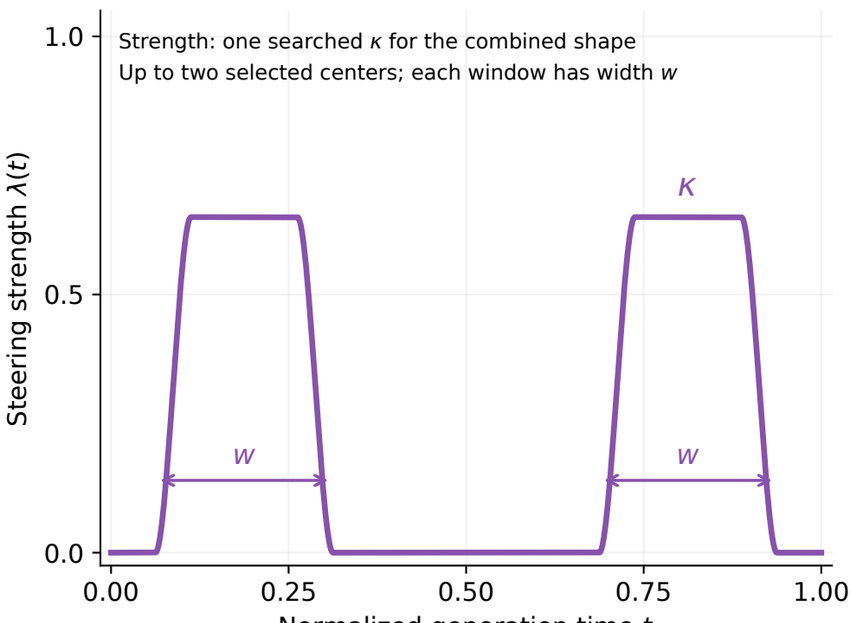

R5 | Optimized smooth schedule

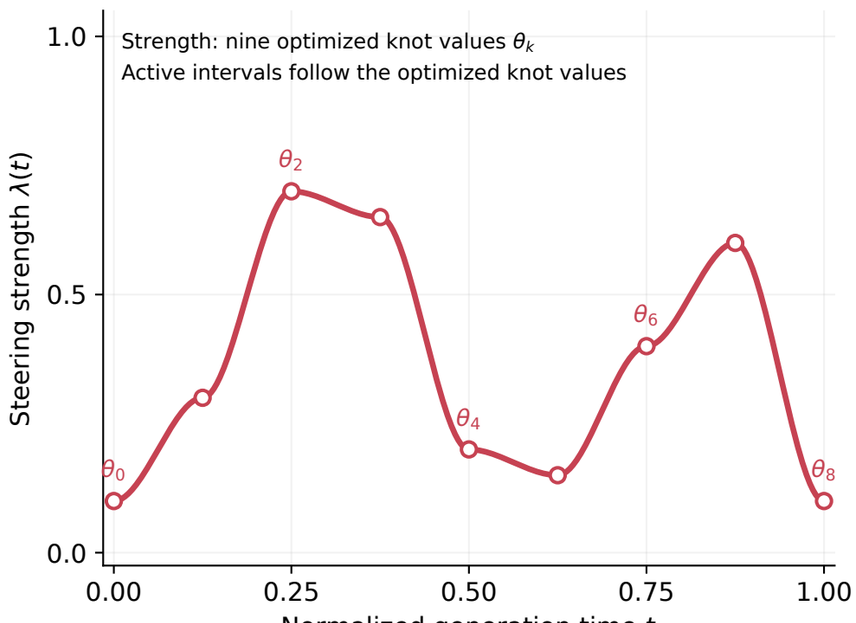

How strength and duration are defined

$t = 0$: initial noise; $t = 1$: final image

$\lambda = 0$: original velocity; $\lambda = 1$: safe velocity

R1-R4: search amplitude κ per prompt.
R2-R4: test widths w = 0.25, 0.50, 0.75.
Each isolated window uses 20% ramps
at its interior start and end.

R5: optimize nine equally spaced knot values;
there is no separate window-width search.

All transitions use smoothstep interpolation.
Curves illustrate definitions; heights and
adaptive centers are illustrative.