25 F BUFFER / LOCAL PCB CUTOUT PROPOSAL

Y/Z section through cell; equal axis scale 14 points/mm. Existing case 98 x 34 x 24 mm.

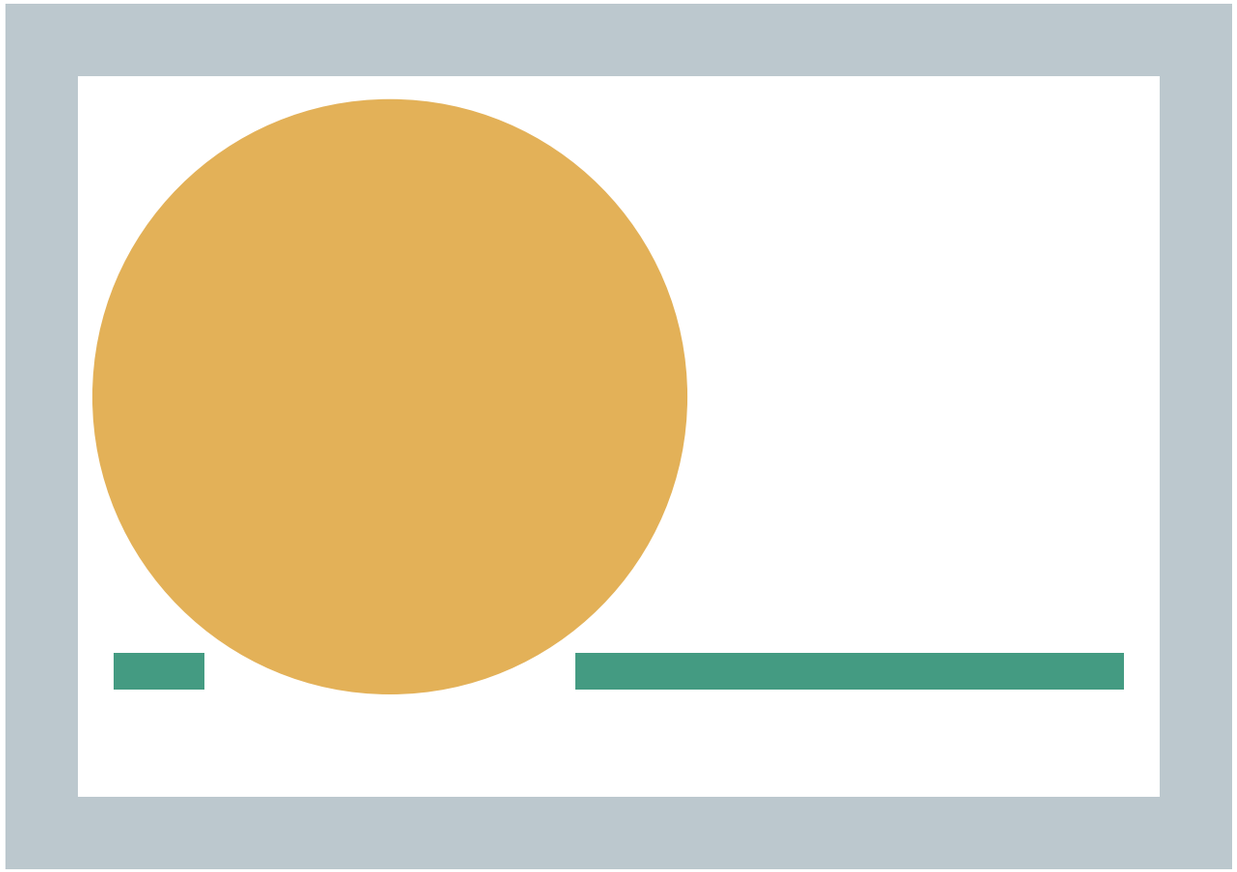

Eaton HV1625-2R7256-R, 25 F / 2.7 V

Maximum can: diameter16.5 x length28.4

Axis X; x27..55.4, cy30.65, cz18.1

Can bottom9.85 / top26.35

PCB z10..11; new aperture:

x26.5..55.9 / y25.5..35.8 (29.4 x 10.3)

Nominal gaps: wall0.40 / lid0.65

Allocated screen: PCB0.231 / wall0.25 / lid0.50

Further case/lid process allowance0.10 remains.

Two cradle saddles x28..31 and50..53

Saddle radius8.60, .35 compliant liner TBD

Lead forming + retainer/vent path remain open.

Can penetrates PCB plane: this is not a drop-in substitution. Original USB tongue, supports, NOR and case are retained.

Screened 173 finite courtyard volumes: zero overlap at allocated heights; no supplier-exact full assembly model.

Cradles are present in FCStd/STEP, omitted here for clarity. Liner, retention, formed leads and PCB routing are NOT released.

16.34 s conditional aged screen at 1.11 W, 80% electronics efficiency, 54 mOhm ESR; not measured or cold-qualified.

No active PCB/CAD/BOM change; all dimensions mm. Supplier lead/temperature and protection qualification required.