25 F INTEGRATED PROTOTYPE / ASSEMBLY SECTIONS

Engineering geometry; not supplier forming approval. All physical dimensions mm; each view scale stated.

X/Z projection: 10 drawing points/mm. Retainers shown schematically at true bounds.

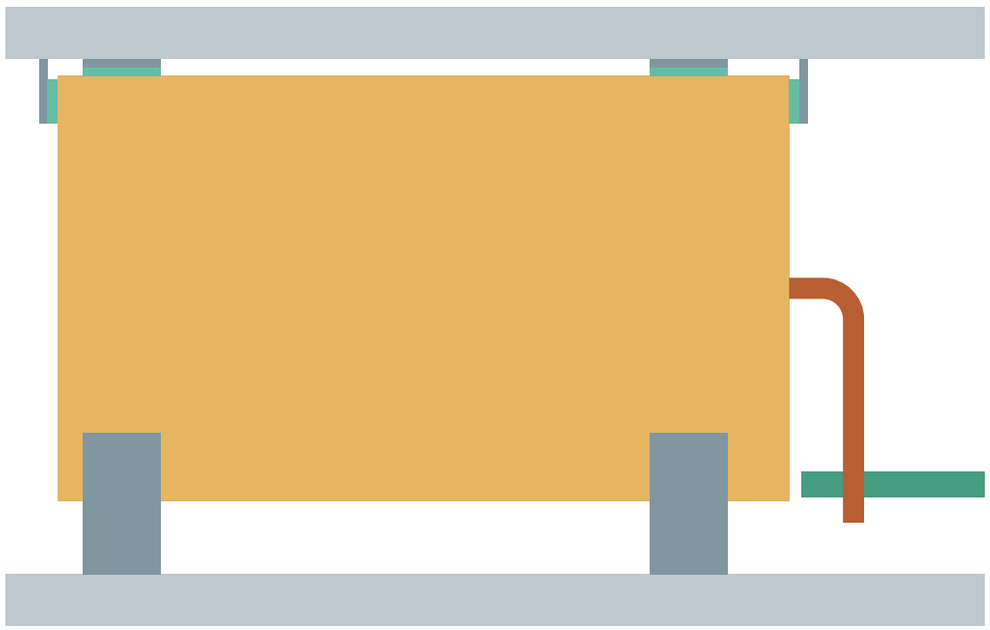

Max can x27..55.4; z9.85..26.35

Body Ø16.5 x 28.4; nominal cell centre z18.1

Axial stop rigid gaps .4 each, with compliant pads

Integral lower saddles; .35 radial silicone liners

Lid bosses + top liners prevent upward escape

Four flush M2x22 screws retain lid to original bosses

Thread/creep/torque and silicone compression unqualified

Lead reference plane x55.4 is max-body face, not

a manufacturer-dimensioned internal seal datum.

Lead form: straight1.3 from body face; centreline R1.2; max wire diameter.82; vertical x57.9, trimz9.

These forming dimensions are engineering proposals. Preform with a supported seal-side clamp; no load on seal.

C23 pin1 positive: y26.9 / CAP_POS. Pin2 negative: y34.4 / GND_USB. Nominal pitch7.5; supplier tolerance +/-0.5.

Lands: oval copper1.7 x 2.7, plated slots1.1 x 2.1; slot long axisY. No paste; explicit hand-solder process gate.

Routed aperture x26.5..55.9 / y25.5..35.8, cornerR0.5. Allocated 3D clearance0.178 (was0.231 square).

Actual PCB pad-to-aperture conservative minimum1.15. Copper endsx58.75; courtyardx58.90, beforeRFx59.

Vent: axial end restraints occupy only upper peripheral regionz24.5..26.2; central endface radius6.4 open.

This opening is geometric, not Eaton vent approval. No encapsulation; verify actual vent location and escape path.

Case98 x 34 x 24 retained; no routed board or manufacturing release. Source data/commands/checks: README.md.