OWNER ACCEPTED:5V USB-C advertising1.5A or3A. UFP only; noUSBdata/noPD escalation. GCT six contacts, not old24pin map.

RawCC/independentAON never fed by backup. TPS259474L is a circuit-breaker/latch-off; no guaranteed transient current ceiling.

SOURCE_SENSE_OD is physical wired-AND rawUV +USBUV +eFusePG. Status adds actualbuckPG and12..28ms assertion delay.

One cap-arm NAND latch: loadedUV or loss of both source and ready backup clears; rebound alone cannot rearm.

SeparateBQ nominal25mA charger. Cap-onlyTPS61023; measured current/ESR/thermal/USB/mechanical/routing gates remain open.

Sheet: /
File: qualified15.kicad_sch

Title: NOVA qualified >=1.5A prototype – main

Size: A1
Date:
KiCad E.D.A. 10.0.7
Rev: Q15-PROTOTYPE-1
Id: 1/2

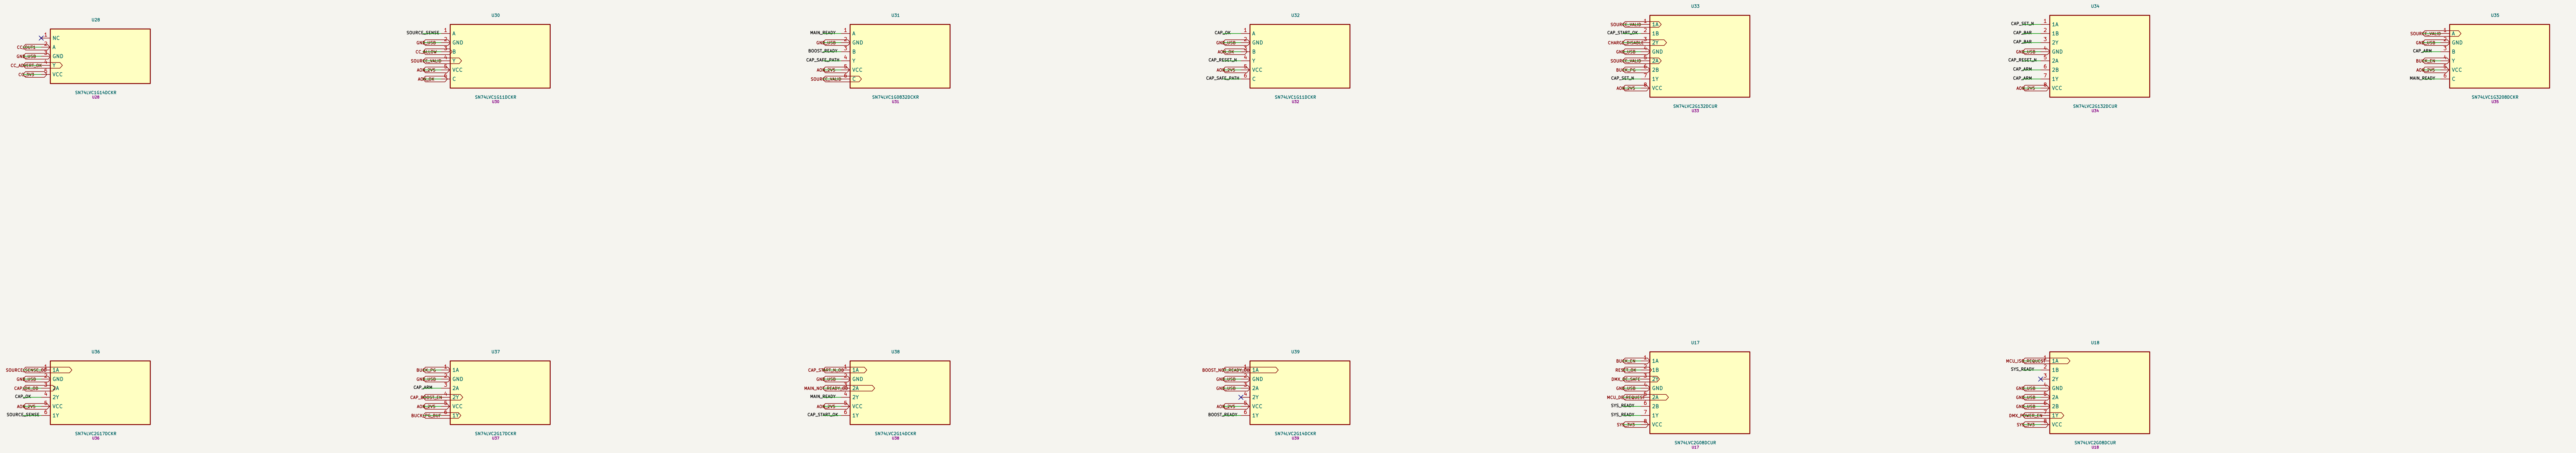

OWNER ACCEPTED:5V USB−C advertising1.5A or3A. UFP only; noUSBdata/noPD escalation. GCT six contacts, not old24pin map.

RawCC/independentAON never fed by backup. TPS259474L is a circuit−breaker/latch−off; no guaranteed transient current ceiling.

SOURCE_SENSE_OD is physical wired−AND rawUV +USBUV +eFusePG. Status adds actualbuckPG and12..28ms assertion delay.

One cap−arm NAND latch: loadedUV or loss of both source and ready backup clears; rebound alone cannot rearm.

SeparateBQ nominal25mA charger. Cap−onlyTPS61023; measured current/ESR/thermal/USB/mechanical/routing gates remain open.

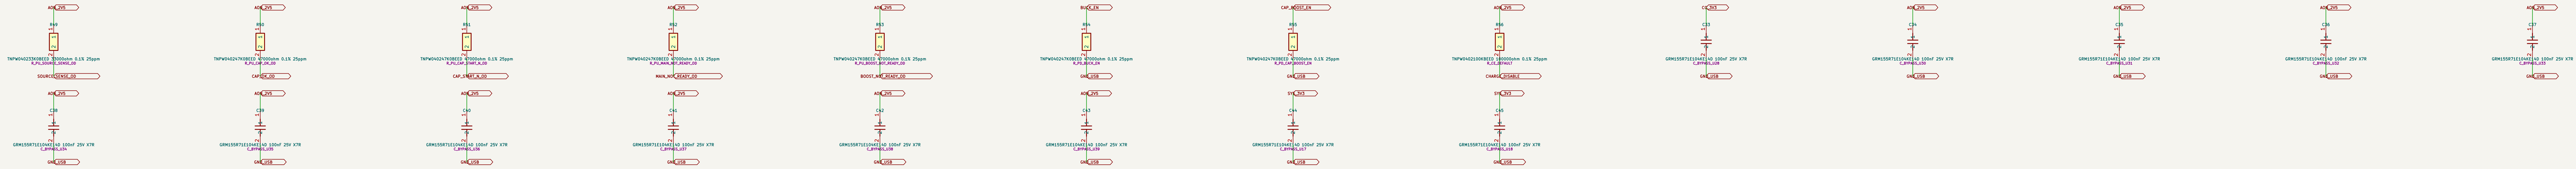
AON_2V5
R49
TNPW040233K0BEED 33000ohm 0.1% 25ppm
R_PU_SOURCE_SENSE_OD
SOURCE_SENSE_OD
AON_2V5
R50
TNPW040247K0BEED 47000ohm 0.1% 25ppm
R_PU_CAP_OK_OD
CAP_OK_OD
AON_2V5
R51
TNPW040247K0BEED 47000ohm 0.1% 25ppm
R_PU_CAP_START_N_OD
CAP_START_N_OD
AON_2V5
R52
TNPW040247K0BEED 47000ohm 0.1% 25ppm
R_PU_MAIN_NOT_READY_OD
MAIN_NOT_READY_OD
AON_2V5
R53
TNPW040247K0BEED 47000ohm 0.1% 25ppm
R_PU_BOOST_NOT_READY_OD
BOOST_NOT_READY_OD
BUCK_EN
R54
TNPW040247K0BEED 47000ohm 0.1% 25ppm
R_PD_BUCK_EN
GND_USB
CAP_BOOST_EN
R55
TNPW040247K0BEED 47000ohm 0.1% 25ppm
R_PD_CAP_BOOST_EN
GND_USB
AON_2V5
R56
TNPW0402100KBEED 100000ohm 0.1% 25ppm
R_CE_DEFAULT
CHARGE_DISABLE
CC_3V3
C33
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U28
GND_USB
AON_2V5
C34
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U30
GND_USB
AON_2V5
C35
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U31
GND_USB
AON_2V5
C36
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U32
GND_USB
AON_2V5
C37
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U33
GND_USB
AON_2V5
C38
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U34
GND_USB
AON_2V5
C39
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U35
GND_USB
AON_2V5
C40
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U36
GND_USB
AON_2V5
C41
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U37
GND_USB
AON_2V5
C42
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U38
GND_USB
AON_2V5
C43
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U39
GND_USB
SYS_3V3
C44
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U17
GND_USB
SYS_3V3
C45
GRM155R71E104KE14D 100nF 25V X7R
C_BYPASS_U18
GND_USB

Sheet: /Actual qualified control/
File: control.kicad_sch

Title: NOVA qualified >=1.5A prototype − control

Size: A1 | Date: | **Rev: Q15−PROTOTYPE−1**
KiCad E.D.A. 10.0.7 | Id: 2/2