








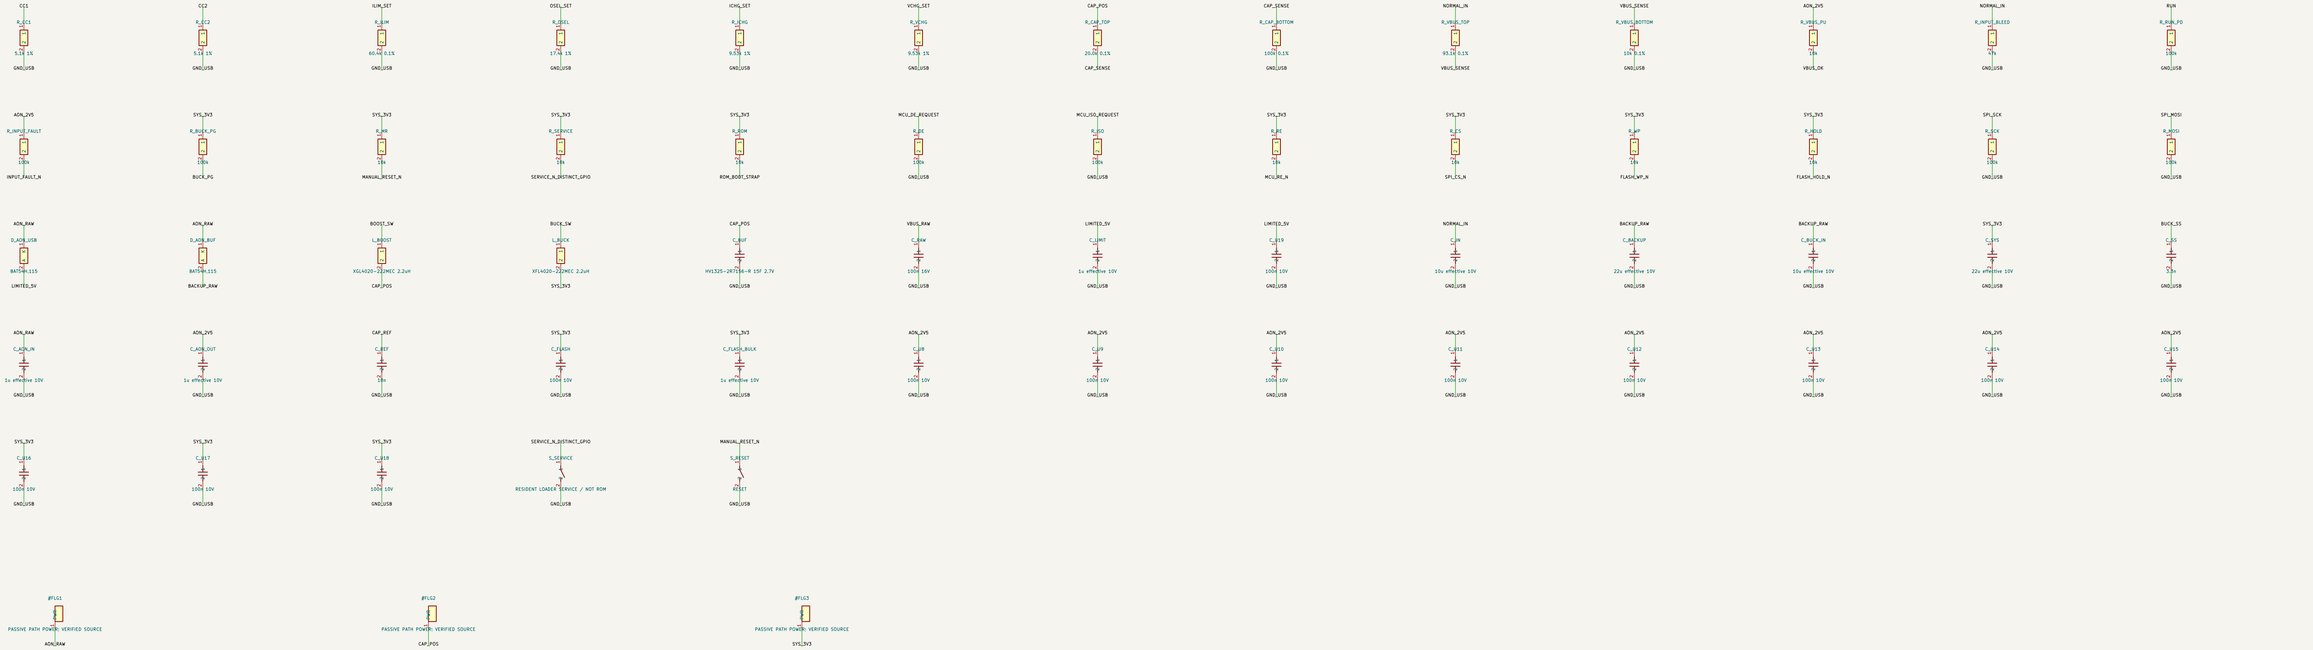

CURRENT POWER-ONLY DESIGN: USB data pins NC. <=500mA PSD design basis: COLD START NOT ACCEPTED (ISS max unknown).

Cap latch: PRE_N=(VBUS_OK & ADN_OK); CLR_N=ADN_OK & (CAP_OK | VBUS_OK); RUN=Q & ADN_OK.

MODE=AGN_RAW independent of RUN. U19 low-loss reverse barrier: U10 senses actual NORMAL_IN (no slow input RC).

SERVICE is distinct from ROM strap; MCU pin allocation lives in mcu-radio/. Power boundary numbers are not package pins.

MCU/RF and existing ISOW1412 sheet are explicit boundaries: no resident ROM loader, security/update code or PCB routing claimed.

15F at2.6V /25mA charge: runtime must subtract 100mV charge hysteresis. Stable source/PG still cannot promise future commit energy.

Sheet: /
File: power-service.kicad_sch
Title: NOVA power—only / buffer / RDM service hardware — PROTOTYPE
Size: A1 | Date: | **Rev: C—POWER-REVIEW-FIX**
KiCad E.D.A. 10.0.7 | Id: 1/1