GCT FLUSH PROTOTYPE - DIMENSIONED Y/Z SECTION

Coordinates in mm. Equal Y/Z scale: 18 drawing points/mm; print scaling may vary.

Connector/stakes are envelopes, not supplier 3D. External plug screening only; no universal cable-fit claim.

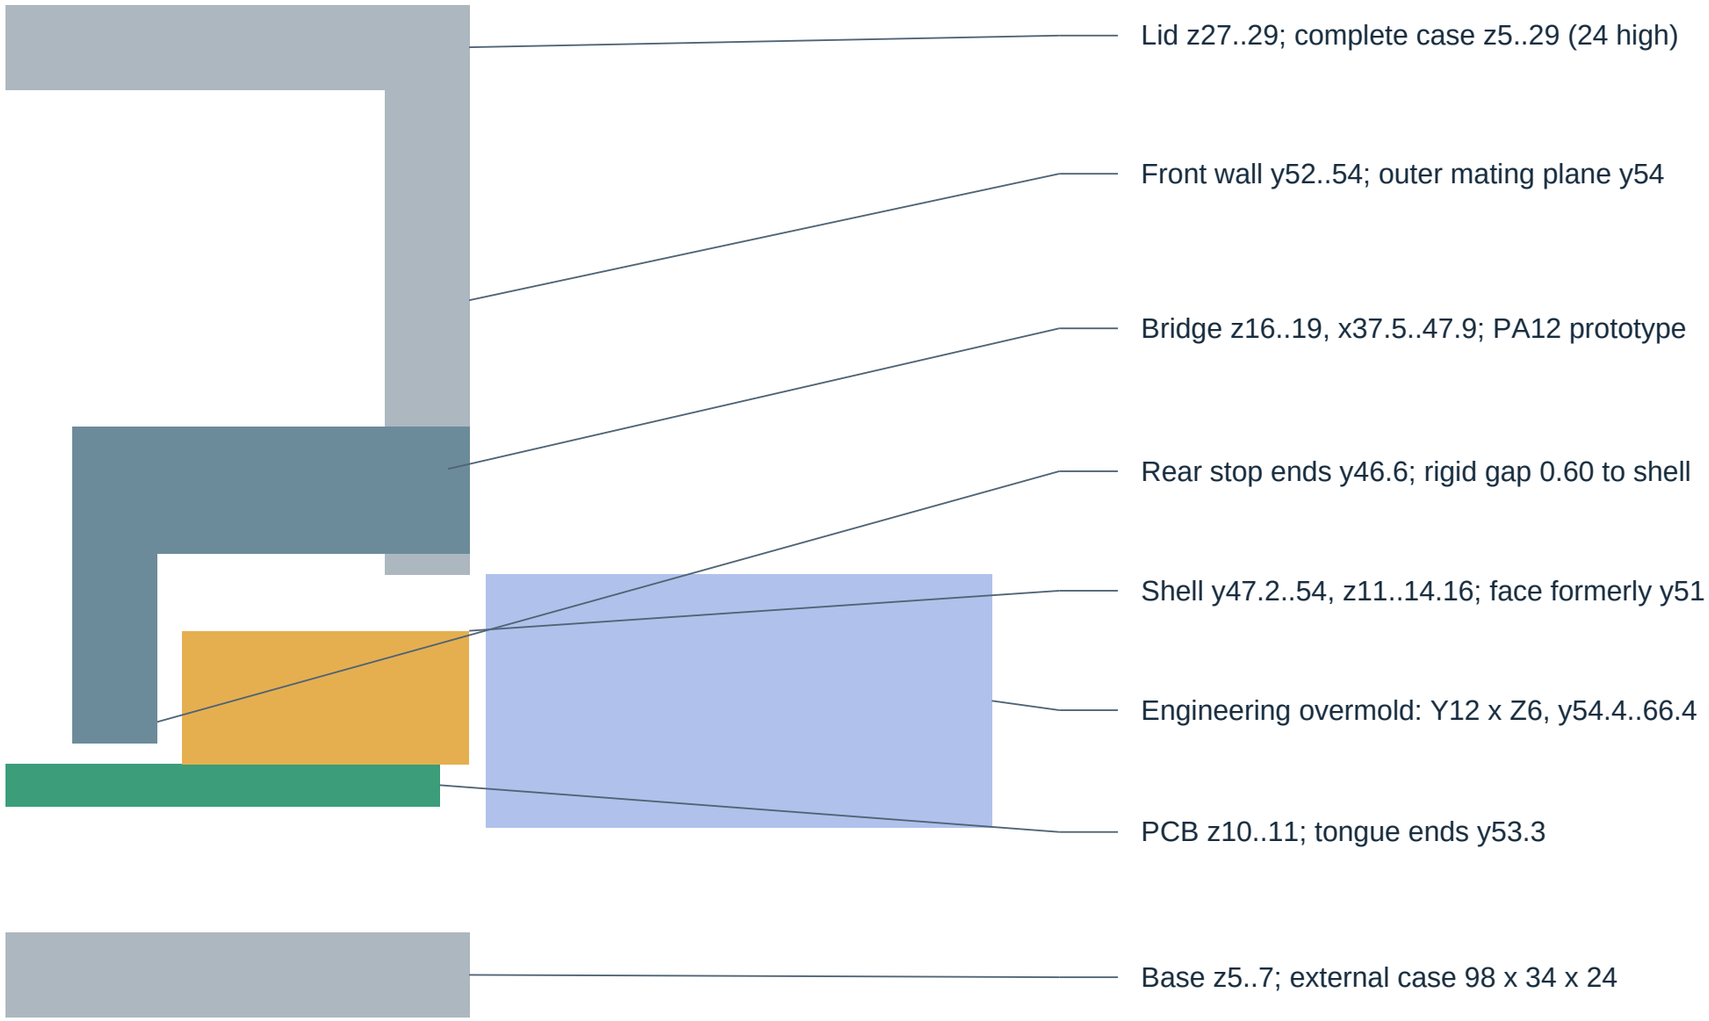

Y increases right; Z increases up. Section at connector centre X42.7.

Stakes and support rails lie out of this section; see PCB view and editable solids.

PLAN: main board x4..94 / y23..51. Tongue x36.5..48.9 / y51..53.3 (12.4 x 2.3).

USB origin (42.7,47.6); stakes x38.38/47.02 at y47.6/51.4; plated slots 0.6 x 1.2.

Rails: x36.9..37.4 and 48.0..48.5, y49..52.7; z7..9.6 + 0.4 foam. Stake screening bottom z9.75.

Bridge, rear stop and shell are projected envelopes; compliant rear pad omitted for clarity. No supplier internal model.

Gates: stake thickness, shim/pad compression, insertion-load/creep strength, exact plug and process tolerances.

Local prototype only; no routed-PCB, RF, power-placement, assembly-fit or manufacturing-release acceptance.