STATIC FANOUT / SECTION AND TERMINATION CONTRACT

Projection through axial width: features at different X are overlaid. Generalized-cylinder surface, not a twisted ribbon.

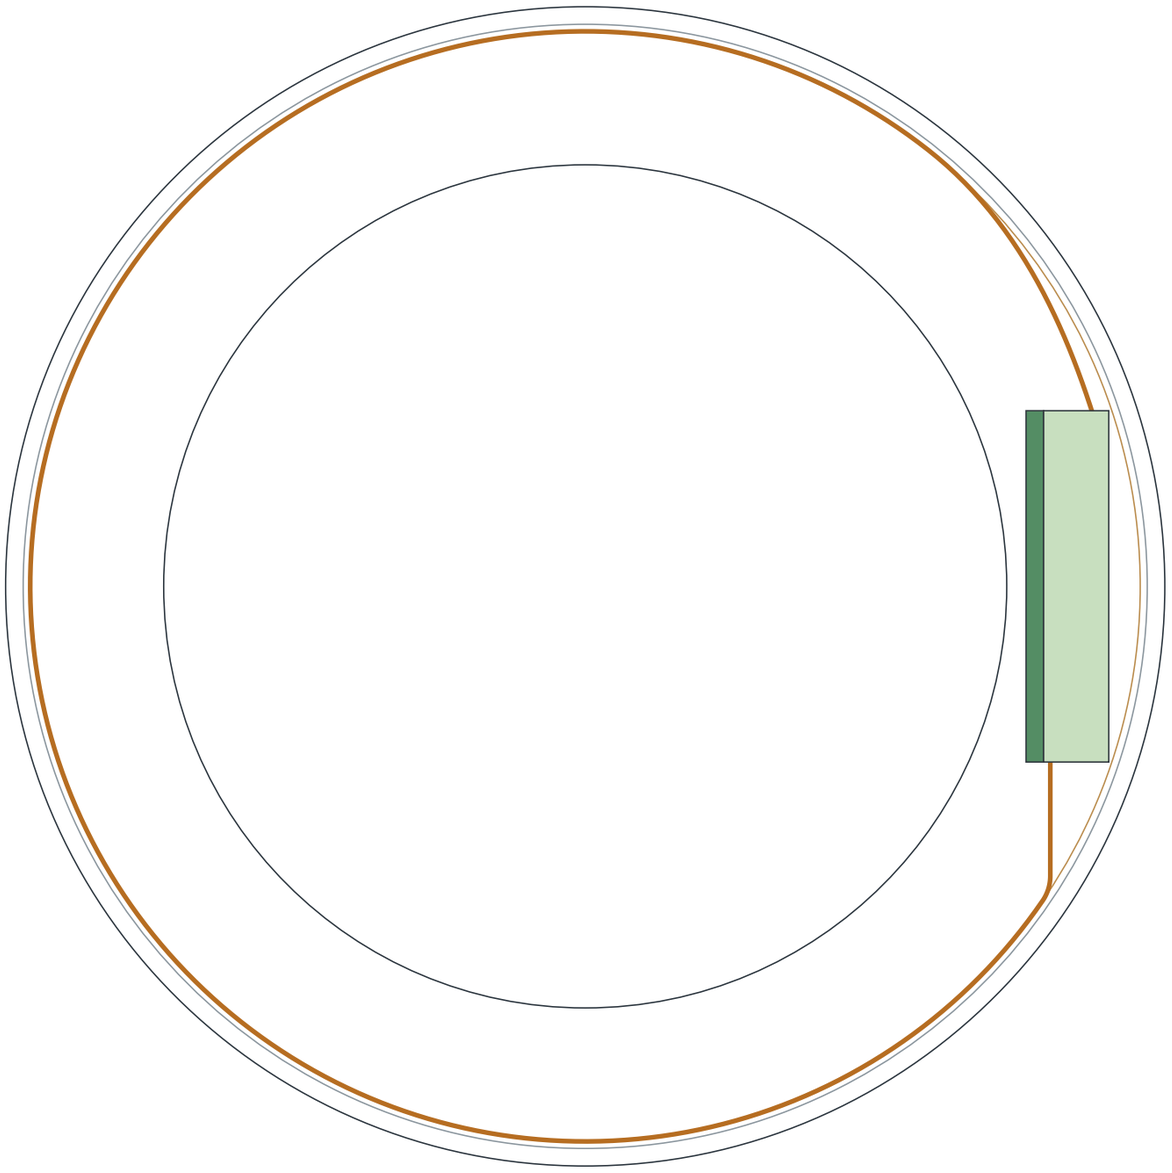

STATIC DEVELOPED PATTERN

Centerline 183.690 mm; active1046.168 unchanged.

Single-layer RA70um / total0.16 proposed stack.

Two8mm traces /1mm gap; Minco material-class basis.

No plated features in active bend; static pad coverlay window.

J0.1 /FPC_5V: local(6,18.4), globalX81.

J0.2 /GND_ISO: local(15,18.4), globalX90.

Pads8 x2, cornerR0.2; unchanged actual KiCad lands.

Exposed flex conductor ends overlap Z-9.4..-7.4.

J0 saved0.3mm land/joint allocation retained.

Joint thickness/fillet/process are engineering gates.

No conductive solder bridge across1mm trace gap.

Clamp Z-14..-12; shoe Y26.56..27.5.

Saddle stops atZ-10.3, before boardedgeZ-10.

Bottom/top flex Y26.4/26.56 at termination.

Bare-copper orientation and polarity require assembly check.

Core R24 / shell ID32 / OD33; projection scale7.5 units/mm. RouteR31.6; bendR2.5.

Axial trim center shifts X57 ->85.5; width20. All ruling lines remain parallel to X.

TERMINAL STRAIGHT SECTION / horizontal32 and vertical55 drawing units per mm

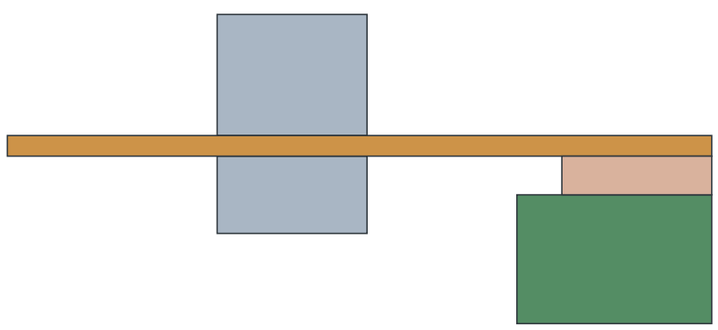

PCB1.0 +/-0.1; source land/joint envelope0.3.

Clamp contacts the full-width covered flex, outside solder lands.

Preload, solder wetting, peel strength and flex profile unqualified.

Incremental hot loop 14.20 mOhm / 42.4 mV at2.987A.

Source power budget must include this static extension.

Finite source/package and solder-allocation envelopes; not supplier connector CAD, approved flex fabrication artwork or manufacturing release.